



# Test Report to EN 303 413 V1.1.1

Satellite Earth Stations and Systems (SES); Global Navigation Satellite System (GNSS) receivers; Radio equipment operating in the 1 164 MHz to 1 300 MHz and 1 559 MHz to 1 610 MHz frequency bands; Harmonized Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU

**Report Number: AT72141218-1R1**

Manufacturer: Johnson Outdoors Marine Electronics, Inc.

Model(s): Helix 7X CHIRP MSI GPS G3N

Test Begin Date: September 20, 2018  
Test End Date: September 24, 2018

Report Issue Date: December 4, 2018



For Scope of Accreditation Under Certificate Number: 2955.09

This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

**Prepared By:**

**Tyler Leeson**  
EMC Technician  
TÜV SÜD America Inc.

**Reviewed by:**

**Jeremy Pickens**  
Senior Wireless Engineer  
TÜV SÜD America Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of TÜV SÜD America Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 16 pages**

## Table of Contents

---

<b>1.0</b>	<b>GENERAL</b>	3
1.1	PURPOSE	3
1.2	MANUFACTURER INFORMATION	3
1.3	PRODUCT DESCRIPTION	3
1.4	TEST METHODOLOGY AND CONSIDERATIONS	4
1.5	MODIFICATIONS OF EUT	4
1.6	REFERENCES	4
<b>2.0</b>	<b>TEST FACILITIES</b>	5
2.1	LOCATION	5
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	5
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	6
<b>3.0</b>	<b>EQUIPMENT UNDER TEST SYSTEM BLOCK DIAGRAM</b>	7
<b>4.0</b>	<b>TEST SETUP BLOCK DIAGRAM(S)</b>	8
<b>5.0</b>	<b>CONCLUSIONS, OBSERVATIONS AND COMMENTS</b>	9
<b>6.0</b>	<b>MEASUREMENT UNCERTAINTY</b>	9
<b>7.0</b>	<b>TEST RESULTS SUMMARY</b>	10
<b>8.0</b>	<b>TEST RESULTS</b>	11
8.1	TEST RESULTS DETAILS	11
8.1.1	<i>Receiver spurious emissions</i>	11
<b>9.0</b>	<b>TEST SETUP PHOTOGRAPHS</b>	12
<b>10.0</b>	<b>PHOTOGRAPHS OF THE EQUIPMENT (UUT)</b>	13
<b>11.0</b>	<b>TEST EQUIPMENT</b>	16

## **1.0 GENERAL**

### **1.1 Purpose**

The purpose of this report is to demonstrate compliance with EN 303 413.

### **1.2 Manufacturer Information**

Johnson Outdoors Marine Electronics, Inc.  
678 Humminbird Ln  
Eufaula, AL 36027

### **1.3 Product Description**

Product Name: Helix 7X CHIRP MSI GPS G3N

The Humminbird Helix 7X CHIRP MSI GPS G3N (411080-1M) is a fishfinder/GPS product with side imaging sonar capability. It is comprised of a keypad, 7" LCD display, two SD card slots, internal GPS, Bluetooth capability, Ethernet capability, transducer and power cable. All G3N CHIRP model variations are built exactly the same. The non G3N variations do not have Bluetooth. They all differ by installed options, SELV circuits, and languages.

HELIX 7 CHIRP GPS G3  
HELIX 7X CHIRP GPS G3  
HELIX 7 CHIRP MDI GPS G3  
HELIX 7X CHIRP MDI GPS G3  
HELIX 7 CHIRP MSI GPS G3  
HELIX 7X CHIRP MSI GPS G3  
HELIX 7X CHIRP GPS G3N  
HELIX 7X CHIRP GPS G3N  
HELIX 7 CHIRP MDI GPS G3N  
HELIX 7X CHIRP MDI GPS G3N  
HELIX 7 CHIRP MSI GPS G3N  
HELIX 7X CHIRP MSI GPS G3N (Tested Variant)  
ICE HELIX 7 CHIRP GPS G2N

Serial numbers: 180731223006 (Radiated)

Technical Information:

<b>Detail</b>	<b>Description</b>
Receiver Frequency / Alignment Range:	1575.42 MHz
Operating Voltage:	3.3Vdc
Internal Antenna Type / Gain:	18.4mm x 18.4mm x 4mm ceramic patch / 1.76dBi
Receiver Category:	3
Constellations Supported:	GPS: L1 GLONASS: G1 WAAS: L1
Temperature Category:	I (General): -20 °C to +55 °C
Type of equipment:	Mobile
Hardware version:	GNSS Receiver: 00080000
Software release:	GNSS Engine FW Rev.: 3.01

**1.4 Test Methodology and Considerations**

No deviation from the test method was applied. Testing was performed with the GNSS receiver placed into receive mode.

For radiated emissions, the EUT was configured such that all accessory and support equipment was located outside the test environment to the extent possible. Those components related to the GNSS receivers were included in the test environment to facilitate measurement of emissions only related to the GNSS receiver.

The data presented in this report represents the worst case where applicable.

Test Sample Condition: The test samples were provided in good working order with no visible defects.

**1.5 Modifications of EUT**

No modification of the EUT where required for compliance.

**1.6 References**

- ETSI EN 303 413 V1.1.1: Satellite Earth Stations and Systems (SES); Global Navigation Satellite System (GNSS) receivers; Radio equipment operating in the 1 164 MHz to 1 300 MHz and 1 559 MHz to 1 610 MHz frequency bands; Harmonized Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU.

## **2.0 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America, Inc.  
5945 Cabot Pkwy, Suite 100  
Alpharetta, GA 30005  
Phone: (678) 341-5900

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

TÜV SÜD America, Inc. is accredited to ISO/IEC 17025 by the American Association for Laboratory Accreditation/A2LA accreditation program and has been issued certificate number 2955.09 in recognition of this accreditation.

Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scopes of accreditation.

The Semi-Anechoic Chamber Test Sites and Conducted Emissions Sites have been fully described, submitted to, and accepted by the FCC, ISED Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number:	967699
ISED Canada Lab Code:	23932
VCCI Member Number:	1831
• VCCI Registration Number	A-0295

## 2.3 Radiated Emissions Test Site Description

### 2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20'W x 30'L x 20'H shielded enclosure. The chamber is lined with ETS-Lindgren Ferrite Absorber, model number FT-1500. The ferrite tile 600 mm x 600 mm (2.62 in x 23.62 in) panels and are mounted directly on the inner walls of the chamber shield.

The specular regions of the chamber are lined with additional ETS-Lindgren PS-600 hybrid absorber to extend its frequency range up to 18GHz and beyond.

The turntable is a 2m ETS-Lindgren Model 2170 and installed off the center axis is located 5'6" from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the shield using #8 solid copper wire.

The antenna mast is an EMCO 1060 and is remotely controlled from the control room for both antenna height and polarization.

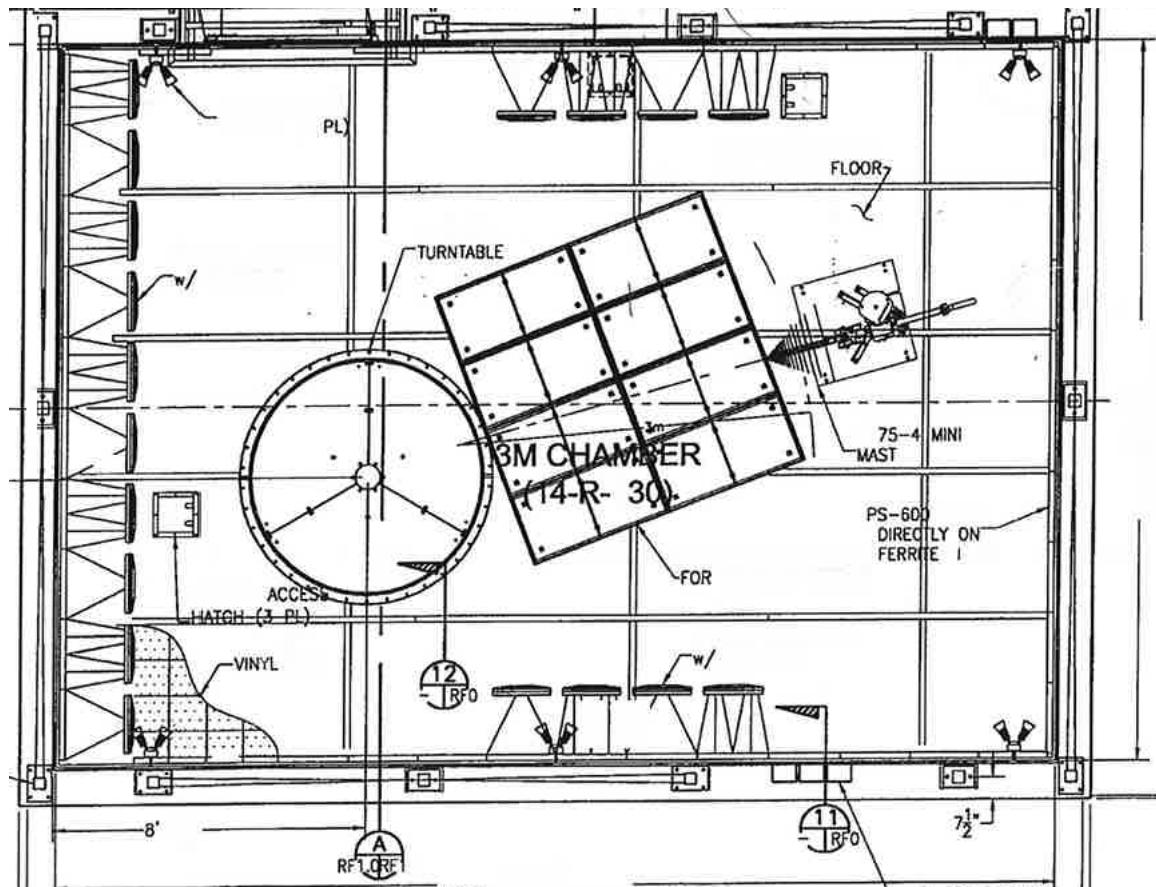


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

### 3.0 EQUIPMENT UNDER TEST SYSTEM BLOCK DIAGRAM

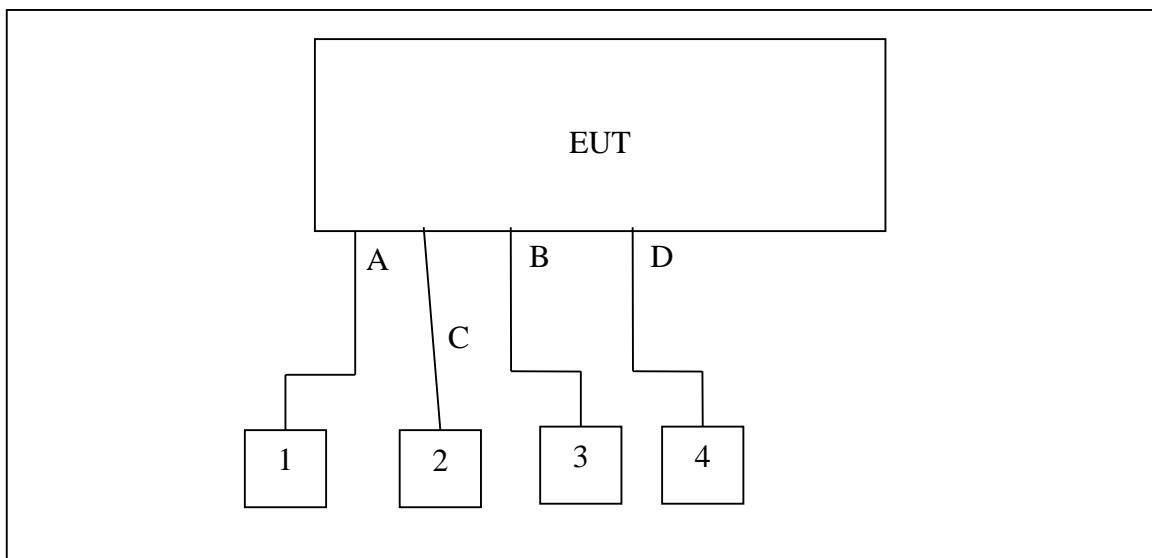


Figure 3-1: EUT System Block Diagram

Table 3-1: EUT and Support Equipment Description

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	External GPS Receiver	Johnson Outdoors	AS GPS HS	14121642-0035
2	Marine Battery	AUTOCRAFT	29HM	N/A
3	Transducer	Johnson Outdoors	N/A	N/A
4	Remote Unit	Johnson Outdoors	Helix 7 CHIRP SI GPS G2N	180424220007

Table 3-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	GPS Cable	600 cm	No	EUT – External GPS Receiver
B	Transducer Cable	600 cm	No	EUT – Transducer
C	DC Power Cable	190 cm	No	EUT – Marine Battery
D	Ethernet Cable	500 cm	No	EUT – Remote Unit

## 4.0 TEST SETUP BLOCK DIAGRAM(S)

## RECEIVER SPURIOUS EMISSIONS MEASUREMENTS

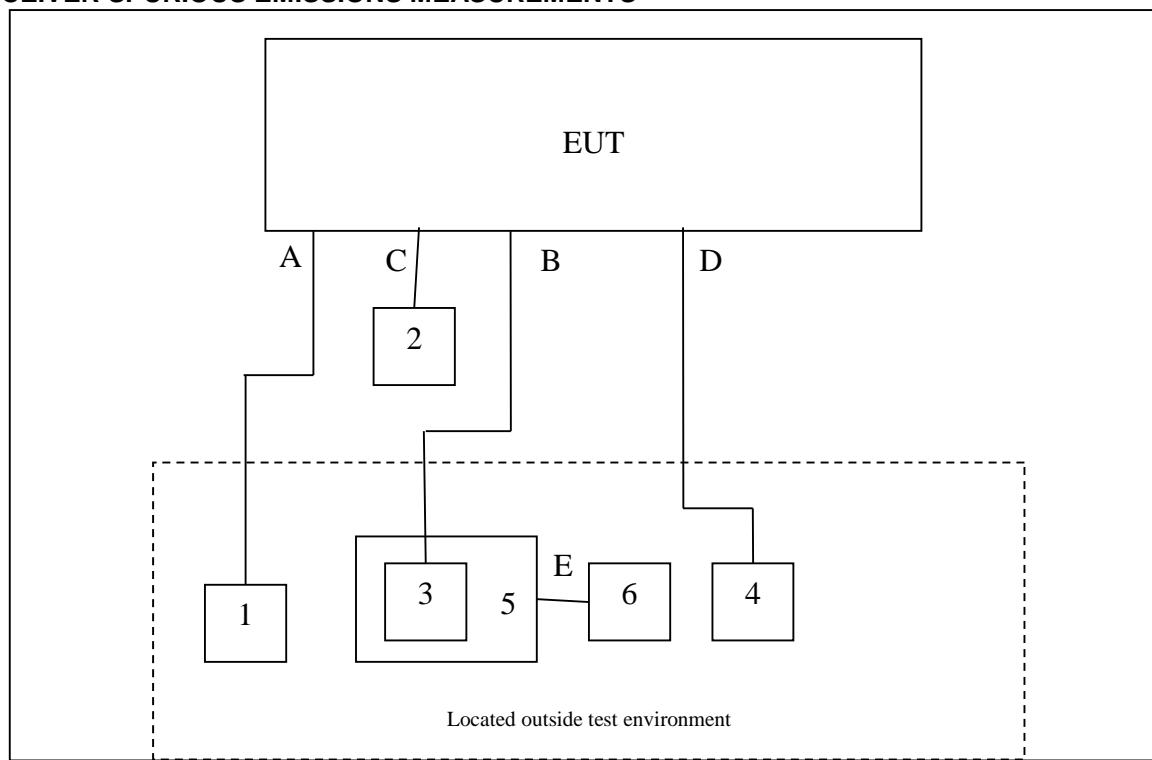


Figure 4-1: Test Setup Block

Table 4-1: Support Equipment Description

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	External GPS Receiver	Johnson Outdoors	AS GPS HS	12071842-0039
2	Marine Battery	AUTOCRAFT	29HM	N/A
3	Transducer	Johnson Outdoors	N/A	N/A
4	Remote Unit	Johnson Outdoors	Helix 7 CHIRP SI GPS G2N	180424220007
5	Depth Simulator Transducer	Johnson Outdoors	N/A	N/A
6	Depth Simulator	Johnson Outdoors	N/A	N/A

Table 4-2: Support Equipment Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	GPS Cable	600 cm	No	EUT – External GPS Receiver
B	Transducer Cable	600 cm	No	EUT – Transducer
C	DC Power Cable	190 cm	No	EUT – Marine Battery
D	Ethernet Cable	500 cm	No	EUT – Remote Unit
E	BNC Cable	85 cm	Yes	Depth Simulator Transducer – Depth Simulator

## 5.0 CONCLUSIONS, OBSERVATIONS AND COMMENTS

The test report will be filed at TÜV SÜD America, Inc. for a period of 10 years following the issue of this report. It may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval from TÜV SÜD America, Inc.

The results of the tests as stated in this report are exclusively applicable to the EUT as identified in this report. TÜV SÜD America, Inc. cannot be held liable for properties of the EUT that have not been observed during these tests.

TÜV SÜD America, Inc. assumes the sample to comply with the requirements of EN 303 413 for the respective test sector, if the test results turn out positive.

Comments: The provider was responsible for ensuring the test samples provided were representative of final production units.

## 6.0 MEASUREMENT UNCERTAINTY

In accordance with ETSI TR 100 028, measurement uncertainties associated with each test have been estimated and expressed in table 6-1 below:

**Table 6-1: Measurement Uncertainties**

Parameter	$U_{std}$	$U_{lab}$
Occupied Channel Bandwidth	$\pm 5 \%$	$\pm 0.009 \%$
RF Output Power Conducted	$\pm 1.5 \text{ dB}$	$\pm 0.349 \text{ dB}$
Power Spectral Density Conducted	$\pm 3 \text{ dB}$	$\pm 0.372 \text{ dB}$
Unwanted Emissions, Conducted	$\pm 3 \text{ dB}$	$\pm 1.264 \text{ dB}$
All Emissions, Radiated	$\pm 6 \text{ dB}$	$\pm 5.814 \text{ dB}$
Temperature	$\pm 1 \text{ }^{\circ}\text{C}$	$\pm 0.860 \text{ }^{\circ}\text{C}$
Supply Voltages	$\pm 3 \%$	$\pm 0.566 \%$
Time (slower than 10us)	$\pm 5 \%$	$\pm 5.000 \%$

The expressed measurement uncertainties shown in the above table have been calculated using a coverage factor of  $k=2$  resulting in a confidence level of 95%.

## **7.0 TEST RESULTS SUMMARY**

Table 7-1 summarizes the results for the tested EUT corresponding with the essential requirements defined in EN 303 413. Table 7-2 summarizes the frequencies evaluated for each essential requirement.

**Table 7-1: Test results summary**

<b>Harmonized Standard EN 303 413</b> The following requirements and test specifications are relevant to the presumption of conformity under the article 3.2 of the RE Directive					
<b>Test Parameter</b>	<b>Test plan (Yes/No)</b>	<b>Test Result</b>	<b>Test Specification Reference: Clause No</b>	<b>Test Report Page No.</b>	<b>Comment</b>
Receiver spurious emissions	Y	PASS	5.5	11	

**Table 7-2: Test Frequencies / Results**

<b>Test</b>	<b>Frequency (MHz)</b>	<b>Result</b>
Receiver Spurious Emissions	1575.420	PASS
Receiver Spurious Emissions	1605.375	PASS

## 8.0 TEST RESULTS

### 8.1 Test Results Details

#### 8.1.1 Receiver spurious emissions

Test Conditions		Test Specification Reference: Clause No		Test Equip. Used with Equip Number		Method
Normal		5.5		30, 90, 213, 338, 731, 819, 836		Radiated
T <sub>nom</sub>	+23 °C					

#### Helix 7X CHIRP MSI GPS G3N – GPS Constellations

DUT Frequency (MHz)	Frequency (MHz)	level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarity (H/V)	Result
1575.420000	231.75	-71.55	-57	14.55	H	PASS
1575.420000	231.75	-72.75	-57	15.75	V	PASS
1575.420000	430.4	-85.99	-57	28.99	H	PASS
1575.420000	430.4	-86.99	-57	29.99	V	PASS
1575.420000	827.45	-89.37	-57	32.37	H	PASS
1575.420000	827.45	-99.37	-57	42.37	V	PASS

\*NOTE: Some of the emissions detected are results of emanations from the digital device or peripheral circuitry and components. Those emissions determined to be directly related to the digital device or peripheral circuitry and components are not included.

## 9.0 TEST SETUP PHOTOGRAPHS



Figure 9-1: Radiated Emissions Test Setup



Figure 9-2: Radiated Emissions Test Setup

## 10.0 PHOTOGRAPHS OF THE EQUIPMENT (UUT)



Figure 10-1: External Photo



Figure 10-2: External Photo



**Figure 10-3: External Photo**



**Figure 10-4: External Photo**



**Figure 10-5: External Photo**



**Figure 10-6: External Photo**

**11.0 TEST EQUIPMENT**

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 11-1: Test Equipment**

Asset ID	Manufacturer	Model	Equipment Type	Serial Number	Last Calibration Date	Calibration Due Date
30	Spectrum Technologies	DRH-0118	1-18GHz Horn Antenna	970102	05/09/2017	05/09/2019
90	Electro-metrics	LPA25	LPA Antenna	1476	01/03/2018	01/03/2020
213	TEC	PA 102	Amplifier	44927	7/19/2018	7/19/2019
338	Hewlett Packard	8449B	High Frequency Pre-Amp	3008A01111	07/11/2017	07/11/2019
412	Electro Metrics	LPA-25	Log Periodic Antenna	1241	08/22/2018	08/22/2020
701	United Microwave Products Inc.	AA-190-20.00.0	Cable	N/A	07/25/2018	7/25/2019
731	EMCO	3104	Bicon Antenna	2659	11/09/2016	11/09/2018
819	Rohde & Schwarz	ESR26	EMI Test Receiver	101345	10/31/2017	10/31/2018
836	ETS Lindgren	SAC Cable Set	SAC Cable Set includes 620, 837, 838	N/A	05/01/2018	05/01/2019

**NCR = No Calibration Required****NOTE: All Equipment only used during active calibration cycles.****END REPORT**