



For Scope of Accreditation Under Certificate Number: AT-2021



EMC Technical Report

Prepared For: Johnson Outdoors Marine Electronics, Inc.

Model Covered: HELIX 7 CHIRP SI G2N

Model Variants: HELIX 7 CHIRP GPS G2N, HELIX 7 CHIRP DI GPS G2N, HELIX 7 CHIRP SI GPS G2N, HELIX 7X CHIRP GPS G2N, HELIX 7X CHIRP DI GPS G2N, HELIX 7X CHIRP SI GPS G2N

**In Accordance with the:
Electromagnetic Compatibility Directive – 2014/30/EU**

Immunity Product Standard: EN 60945:2002

Emissions Product Standard(s):

EN 60945:2002

ACS Report: 16-0342.C08.3C

Report Revision: C

Report Issue Date: November 4, 2016

Project Manager:

**Wayne Orwig
EMC Engineer
Advanced Compliance Solutions, Inc.**

Reviewed by:

**Forrest Duncan
Operations Manager Commercial EMC
Advanced Compliance Solutions, Inc.**

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, NIST, or any agency of the Federal Government.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 47 pages

REVISION HISTORY

Report Number: 16-0342.C08.3C

Manufacturer: Johnson Outdoors Marine Electronics, Inc.

Model: HELIX 7 CHIRP SI G2N

Project Information Sheet

ACS Project: 16-0342.C08.3C

Applicant Details

Manufacturer: Johnson Outdoors Marine Electronics, Inc.

Street Address: 678 Humminbird Lane

City, State/Province and Postal Code:
Eufaula, AL 36027

Country: USA

Contact: Seth Bergman

Phone: 334-687-6613

Fax:

Email: sbergman@johnsonoutdoors.com

Sample Information

Model: HELIX 7 CHIRP SI G2N

Model Variant(s): HELIX 7 CHIRP GPS G2N, HELIX 7 CHIRP DI GPS G2N, HELIX 7 CHIRP SI GPS G2N, HELIX 7X CHIRP GPS G2N, HELIX 7X CHIRP DI GPS G2N, HELIX 7X CHIRP SI GPS G2N

Environment of Use: Residential

Sample Receive Date: July 25, 2016

Sample Receive Condition: Good

Test Mode Description: GPS Active; Sonar mode measuring depth (7.2 ft), Speed/Temp Sensor Active

Unacceptable Degradation (Provided by Mfg.): The Depth reading should stay within +/- 2ft. The manufacturer declares an exclusion band for the SONAR and GPS frequencies of +/- 5%. The sonar frequency is designed to work at 200kHz during normal operation.

Highest Data Rate: 800MHz

Source: Main processor

Product Description

The Humminbird HELIX 7 CHIRP SI G2N is a Sonar/Fishfinder product to be used in the marine environment. Product has a 7" display, 10 keypad buttons and displays Sonar return information on the screen. It differs from the H7 G2 by including Ethernet and Bluetooth (Classic and BLE).

The client declares all models are identical and differ only in software. The HELIX 7 CHIRP SI G2N having the most functionality, was submitted for testing to represent the above model variants.

Test Information

Test Start Date: July 27, 2016

Test End Date: August 2, 2016

Emissions Pre-scan Site: SAC

Final Emissions Site: SAC

EMI Freq. Band: 10kHz - 10GHz

RFI Site: FAC

Radiated Emissions Equipment Class: Class B

Harmonic Current EMI Class: N/A

Test Methods Applied

(Check all that apply)

CISPR 16-2-1 Ed. 1.1 2005

CISPR 16-2-3 1st Ed. 2003

IEC 61000-4-2 Ed. 2.0

IEC 61000-4-3 Ed. 3.2

IEC 61000-4-4 Ed. 2.0

IEC 61000-4-5 2nd Ed.

IEC 61000-4-6 3rd Ed.

IEC 61000-4-8 2nd Ed.

IEC 61000-4-11 2nd Ed.

Table of Contents

SECTION A: GENERAL INFORMATION	5
1.0 INTRODUCTION	5
1.1 Scope.....	5
1.2 Purpose.....	5
1.3 Results Summary.....	6
1.4 Performance Criteria	7
2.0 TEST FACILITIES & ENVIRONMENT.....	8
2.1 Test Facilities	8
2.2 Laboratory Accreditations/Recognitions/Certifications.....	8
2.3 Test Environment.....	8
2.4 Test Equipment Calibration Statement.....	8
3.0 EQUIPMENT UNDER TEST (EUT)	8
3.1 Manufacturer	8
3.2 Modifications	8
3.3 System Block Diagram and Support Equipment.....	9
3.4 Observations	10
SECTION B: EMISSIONS – TEST INFORMATION AND RESULTS	11
4.0 RADIATED AND CONDUCTED EMISSIONS	11
4.1 Radiated Emissions.....	11
4.2 Conducted Emissions.....	20
5.0 HARMONIC CURRENT EMISSIONS	27
6.0 VOLTAGE FLUCTUATIONS & FLICKER.....	28
SECTION C: IMMUNITY – TEST INFORMATION AND RESULTS	29
7.0 ELECTROSTATIC DISCHARGE IMMUNITY	29
8.0 RADIO-FREQUENCY ELECTROMAGNETIC FIELDS.....	35
9.0 ELECTRICAL FAST TRANSIENT/BURSTS	38
10.0 SURGE IMMUNITY	41
11.0 RADIO-FREQUENCY COMMON-MODE IMMUNITY	42
12.0 POWER FREQUENCY MAGNETIC FIELDS IMMUNITY	45
13.0 VOLTAGE DIPS AND INTERRUPTIONS	46
SECTION D: MEASUREMENT UNCERTAINTY	47
SECTION E: CONCLUSION	47

SECTION A: GENERAL INFORMATION

1.0 Introduction

1.1 Scope

This report documents conformance with the requirements set forth in EN 60945:2002 and details the results of testing performed on July 27, 2016 through August 2, 2016 on the model HELIX 7 CHIRP SI G2N manufactured by Johnson Outdoors Marine Electronics, Inc..

1.2 Purpose

Testing was performed to evaluate the EUT with regard to EMC regulatory requirements in accordance with the European Unions CE Marking arrangements.

1.3 Results Summary

Product Standard or Test Method Applied	Description	Result
<u>Product Standards</u>		
EN 60945:2002	Maritime navigation and radio communication equipment and systems General Requirements Methods of testing and required test results	Pass
EN 61000-3-2:2014	Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current <= 16 A per phase)	N/A
EN 61000-3-3:2013	Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current <= 16 A per phase and not subject to conditional connection	N/A
<u>Basic Immunity Standards per EN 60945:2002</u>		
IEC 61000-4-2 Ed. 2.0	Electromagnetic compatibility (EMC) - Part 4-2: Testing and measurement techniques - Electrostatic discharge immunity test	Pass
IEC 61000-4-3 Ed. 3.2	Electromagnetic compatibility (EMC) - Part 4-3: Testing and measurement techniques - Radiated, radio-frequency, electromagnetic field immunity test	Pass
IEC 61000-4-4 Ed. 2.0	Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test	Pass
IEC 61000-4-5 2 nd Ed.	Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test	N/A
IEC 61000-4-6 3 rd Ed.	Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields	Pass
IEC 61000-4-8 2 nd Ed.	Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test	N/A
IEC 61000-4-11 2 nd Ed.	Electromagnetic compatibility (EMC) - Part 4-11: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests	N/A

N/A = Test Not Applicable to this EUT

N/P = Not Performed. See Test Justification for Details

1.4 Performance Criteria

1.4.1 Emissions Performance Criteria

For model HELIX 7 CHIRP SI G2N the limits which apply are EN 60945:2002 Class B. These limits are found in Table 1.4.1-1 below:

Table 1.4.1-1 Emissions Limits EN 60945:2002 Class B

	Portable	Protected	Exposed	Submerged
Conducted emissions (9.2)		10 kHz – 150 kHz 150 kHz – 350 kHz 350 kHz – 30 MHz	63 mV – 0,3 mV (96 dB μ V – 50 dB μ V) 1 mV – 0,3 mV (60 dB μ V – 50 dB μ V) 0,3 mV (50 dB μ V)	
Radiated emissions (9.3)	150 kHz – 300 kHz 300 kHz – 30 MHz 30 MHz – 2 GHz 156 MHz – 165 MHz	10 mV/m – 316 μ V/m (80 dB μ V/m – 52 dB μ V/m) 316 μ V/m – 50 μ V/m (52 dB μ V/m – 34 dB μ V/m) 500 μ V/m (54 dB μ V/m) except for 16 μ V/m (24 dB μ V/m) quasi-peak or 32 μ V/m (30 dB μ V/m) peak		

1.4.2 Immunity Performance Criteria

Each immunity test requires 1 of 3 performance criteria to be met. Below are descriptions of each.

Performance Criterion A: The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance Criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance Criterion C: Temporary loss of function is allowed, provided the function is self recoverable or can be restored by the operation of the controls

2.0 Test Facilities & Environment

2.1 Test Facilities

All testing was performed at the following address:

Advanced Compliance Solutions, Inc.
5015 B.U. Bowman Drive
Buford GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598
www.acstestlab.com

The laboratory is fully equipped to carry out the tests outlined in section 1.0

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the ANSI-ASQ National Accreditation Board/ANAB accreditation program, and has been issued certificate number AT-2021 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

2.3 Test Environment

Unless otherwise specified by the generic or product standard, the EUT was evaluated within the climate conditions of the EUT as specified by the manufacturer.

Where the manufacturer does not specify climate parameters for the EUT, all test are performed within the climate parameters given below:

- Ambient temperature 15° to 35° C
- Relative Humidity 30% to 60%
- Atmospheric Pressure 860mbar to 1060mbar

2.4 Test Equipment Calibration Statement

Test equipment used for each test is specified in the relevant sections of this test report. Unless expressly given, all test equipment is calibrated on an annual basis, where applicable. All test equipment is operated within the climate specifications as defined by the manufacturer.

3.0 Equipment Under Test (EUT)

3.1 Manufacturer

Johnson Outdoors Marine Electronics, Inc.
678 Humminbird Lane
Eufaula, AL 36027
Seth Bergman
334-687-6613
sbergman@johnsonoutdoors.com

3.2 Modifications

Table 3.2-1 below describes any modification required to bring the EUT into compliance with the test standard. Photographs of the modifications, if any, are contained in appendix a.

Table 3.2-1: EUT Modifications

<input checked="" type="checkbox"/> Modifications <u>were not</u> required to bring the EUT into compliance with the requirements.
<input type="checkbox"/> Modifications <u>were</u> required to bring the EUT into compliance with the requirements.

3.3 System Block Diagram and Support Equipment

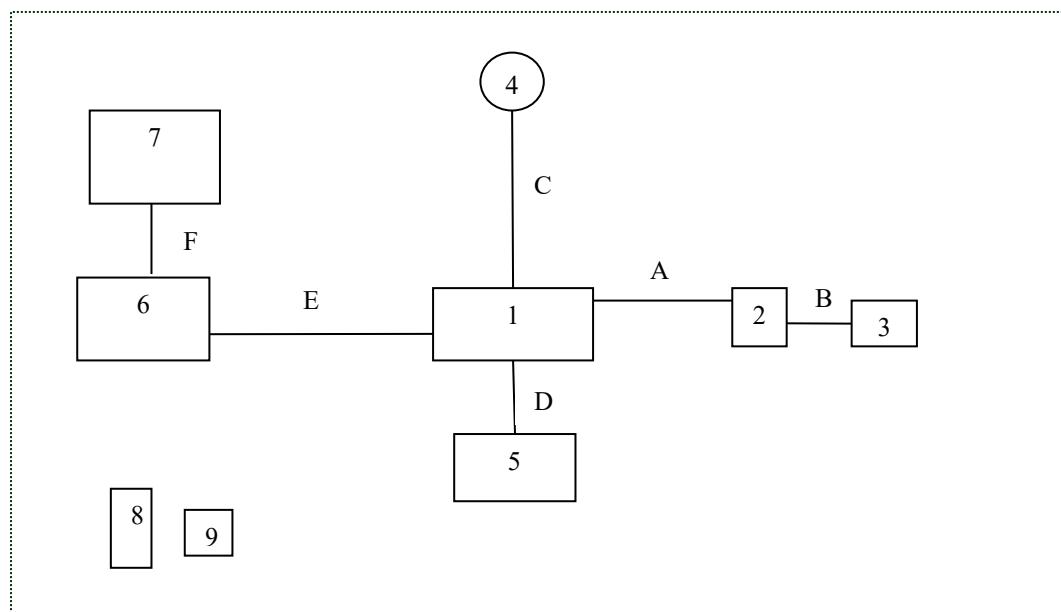


Figure 3.3-1: System Block Diagram

Table 3.3-1: EUT and Support Equipment Description

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT Display	Humminbird	Helix 7	N/A
2	Depth Sensor	Johnson Outdoors	N/A	N/A
3	Floor Simulator Switch	Johnson Outdoors	N/A	N/A
4	GPS	Humminbird	AS GPS HS	16060942-0040
5	12V Battery	ExpertPower	EXP12180	N/A
6	Support Display Unit	Humminbird	Helix 7	N/A
7	12V Battery	AutoCraft	24DC-1	N/A
8	Support Cell Phone	Samsung	N/A	SM-N920V
9	Wireless Remote	Humminbird	N/A	N/A

Table 3.3-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	Depth Sensor Power Cable	600 cm	Yes	1 - 2
B	Floor Simulator Switch Cable	35 cm	Yes	2 - 3
C	GPS Power Cable	600 cm	Yes	1 - 4
D	EUT Power Cable	200 cm	Yes	1 - 5
E	DIN Connecting Cable	1000 cm	Yes	1 - 6
F	Support Display Power Cable	30 cm	Yes	6 - 7

3.4 Observations

Any general observations regarding any part of the evaluation are given in table 3.4-1.

Table 3.4-1: Observations

<u>Observation No.</u>	<u>Description</u>

SECTION B: EMISSIONS – TEST INFORMATION AND RESULTS

4.0 Radiated and Conducted Emissions

4.1 Radiated Emissions

4.1.1 Test Site Description

4.1.1.1 Open Area Test Site

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style reinforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 4.1.1.1-1 below:

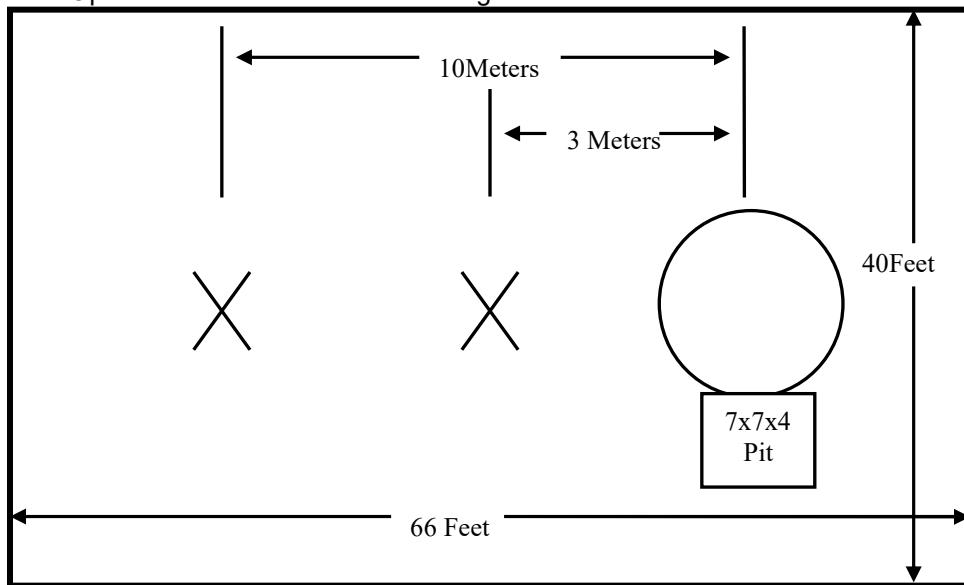


Figure 4.1.1.1-1: Open Area Test Site

4.1.1.2 Semi-Anechoic Chamber

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 4" x 4" x 3/4" thick and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable. The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

To comply with the requirements of the test methods given on page 3, RF absorbing foam was placed inside the chamber in a configuration that provided the best results. First, an 8 ft. patch of 12" tall absorber was placed on the floor between the turntable and the receiving antenna. This absorber meets the absorption requirements specified in ANSI C63.4:2009. Next, three vertical structures (Fences) were created and covered with 8" pyramidal RF absorbing foam, two 4 ft. x 4 ft. and one 6 ft. x 4 ft. These fences were placed at locations to prevent high energy signals from reaching the back chamber wall and reflecting back to the receive antenna.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 4.1.1.2-1 below:

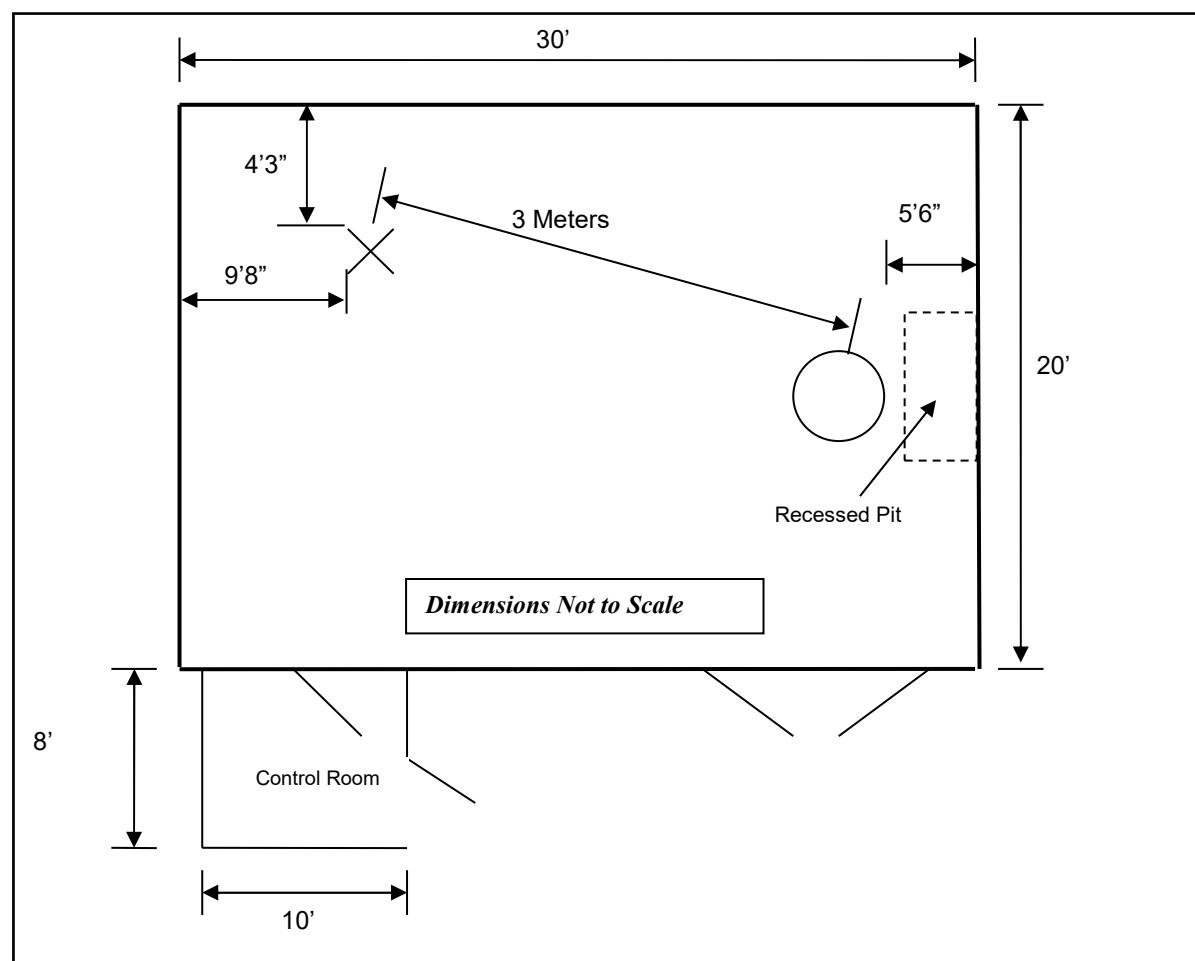


Figure 4.1.1.2-1: Semi-Anechoic Chamber Test Site

4.1.1.3 Fully Anechoic Chamber

The 3m fully anechoic chamber is used for pre-screening the EUT for emissions only. Final screening is performed on the OATS or in case of Class B EUT's, in the 3m semi-anechoic chamber. The Fully Anechoic Chamber has been characterized for field uniformity in accordance with IEC 61000-4-3 and can be used for final radiated fields immunity testing.

The Fully-Anechoic Chamber Test Site consists of a 24'L x 16'W x 12'H shielded enclosure. The chamber is fully lined with RF absorbing foam. The foam ranges in type from 8-24" conventional pyramidal cones, 8-12" conventional wedges and 6" and 16" Hybrid Foam over ferrite tile. The Hybrid material is placed in the 6 specular regions of the chamber for better low-frequency performance. The specular regions are 1) directly behind the receiving antenna, 2) on the floor between the receiving antenna and the EUT table, 3) the wall directly behind the EUT, 4&5) the side walls between the receiving antenna and the EUT table and 6) the ceiling between the receiving antenna and the EUT. The specular regions are 6' x 4' in size.

The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the shield using 3/4" stainless steel braided cable.

The turntable is a remotely controlled EMCO Model 1060 and is 150cm in diameter and is located 1m from the absorber on the back wall of the chamber.

A diagram of the Fully Anechoic Chamber Test Site is shown in Figure 4.1.1.3-1 below:

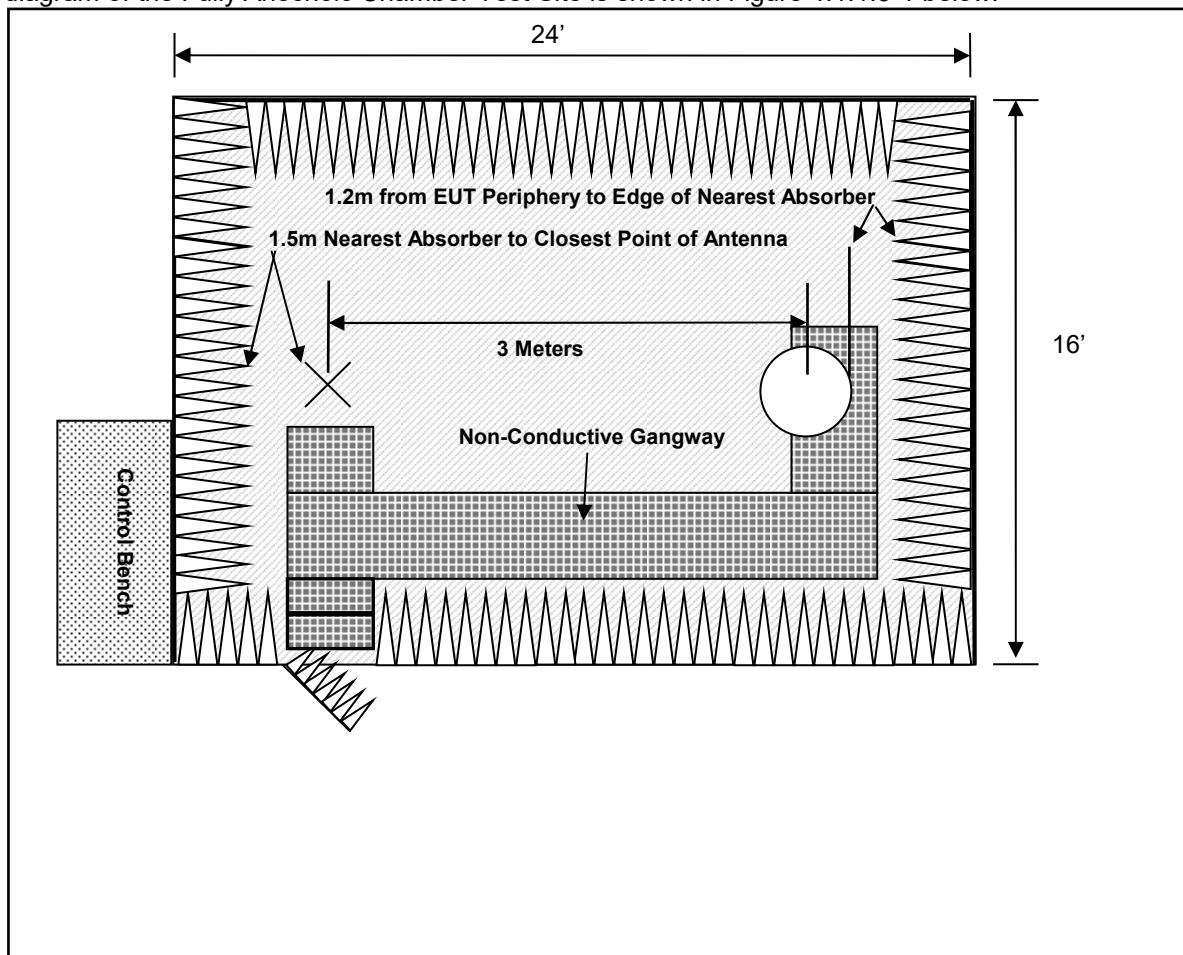


Figure 4.1.1.3-1: Fully Anechoic Chamber Test Site

4.1.2 Test Equipment

Table 4.1.2-1 identifies all equipment used for radiated emissions respectively.

Table 4.1.2-1 Test Equipment – Radiated Emissions

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
RE619	Rhode & Schwarz	ESU26	Spectrum Analyzers	302.6005K26 Ser. 1001	11/5/2014	11/5/2016
73	Agilent	8447D	Amplifiers	2727A05624	7/21/2016	7/21/2017
412	Electro Metrics	LPA-25	Antennas	1241	8/8/2016	8/8/2018
338	Hewlett Packard	8449B	Amplifiers	3008A01111	8/21/2015	8/21/2017
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/30/2015	4/30/2017
40	EMCO	3104	Antennas	3211	6/8/2016	6/8/2018
616	Florida RF Cables	IRE-200W-12.0-SM	Cables	N/A	9/2/2016	9/2/2017
422	Florida RF	MS-200AW-72.0-SM	Cables	805	10/30/2015	10/30/2016
167	ACS	Chamber EMI Cable Set	Cable Set	167	10/20/2015	10/20/2016
628	EMCO	6502	Antennas	9407-2877	2/11/2016	2/11/2018

NCR = No Calibration Required

4.1.3 Test Methodology

4.1.3.1 Pre-Scans

Radiated pre-scans are performed on all EUT's in either the 3m Semi-Anechoic or the 3m Fully-Anechoic Chamber. Final emission testing for Class A equipment is performed on the 3/10m Open Area Test Site (OATS) as described in section 4.1.1.1. Final emission testing on Class B equipment can be performed either in the 3m Semi-Anechoic chamber described in section 4.1.1.2 or on the OATS.

Pre-scans are a method by which the 10 highest emissions can be identified for final evaluation. This is achieved by taking automated emission snapshots of the EUT at various azimuths and antenna heights. The software is programmed to perform a peak sweep of the band using the maxhold function. This sweep is performed every 90° in both horizontal and vertical polarities and at antenna heights of 100cm and 300cm. Although not a fully maximized scan, the pre-scan gives a good indication of pass or fail.

4.1.3.2 Final Scans

Radiated emissions measurements were made over the frequency range of 150kHz – 4GHz. Quasi-Peak measurements are taken with the Spectrum Analyzer's resolution bandwidth was set to 120KHz and video bandwidth set to 300 kHz for measurements below 1000MHz. Average measurements above 1000MHz are taken using measurement instruments average detector. The calculation for the radiated emissions field strength is as follows:

Corrected Reading = Analyzer Reading + Cable Loss + Antenna Factor

Margin(dB) = Applicable Limit - Corrected Reading

4.1.3.3 Test Criteria

The EUT must meet the Class B Limits as given in section 1.4.1.

4.1.3.4 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.
 The test method, standard, and/or test plan was deviated from for the following reason:

4.1.4 Test Setup Photographs

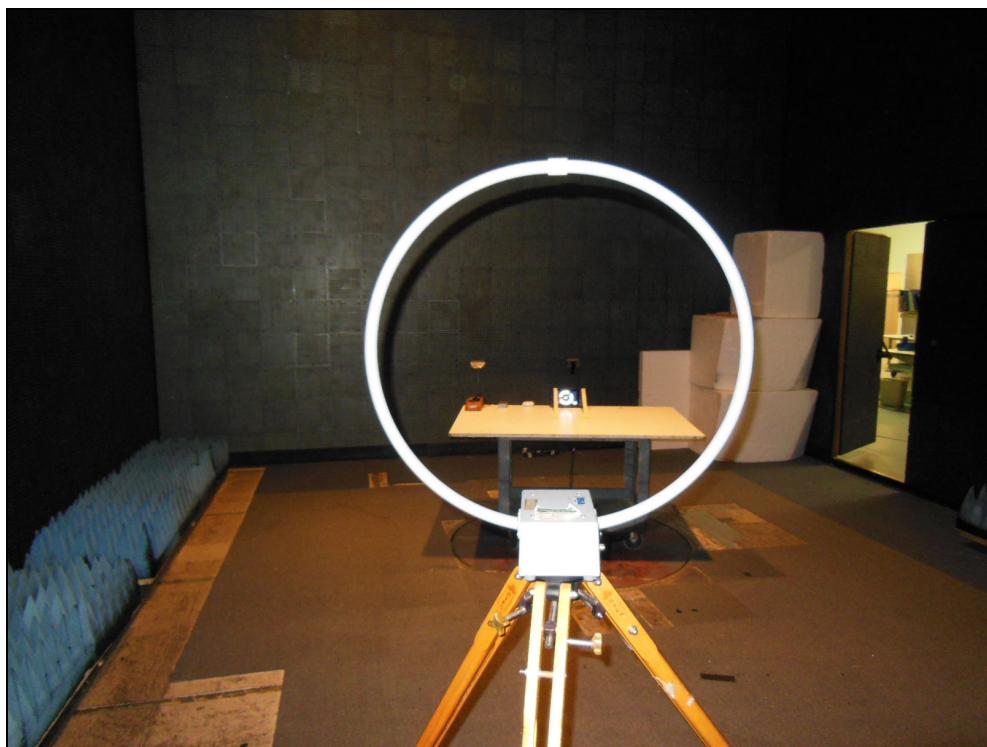


Figure 4.1.4-1: Radiated Emissions - Front View – Below 30MHz

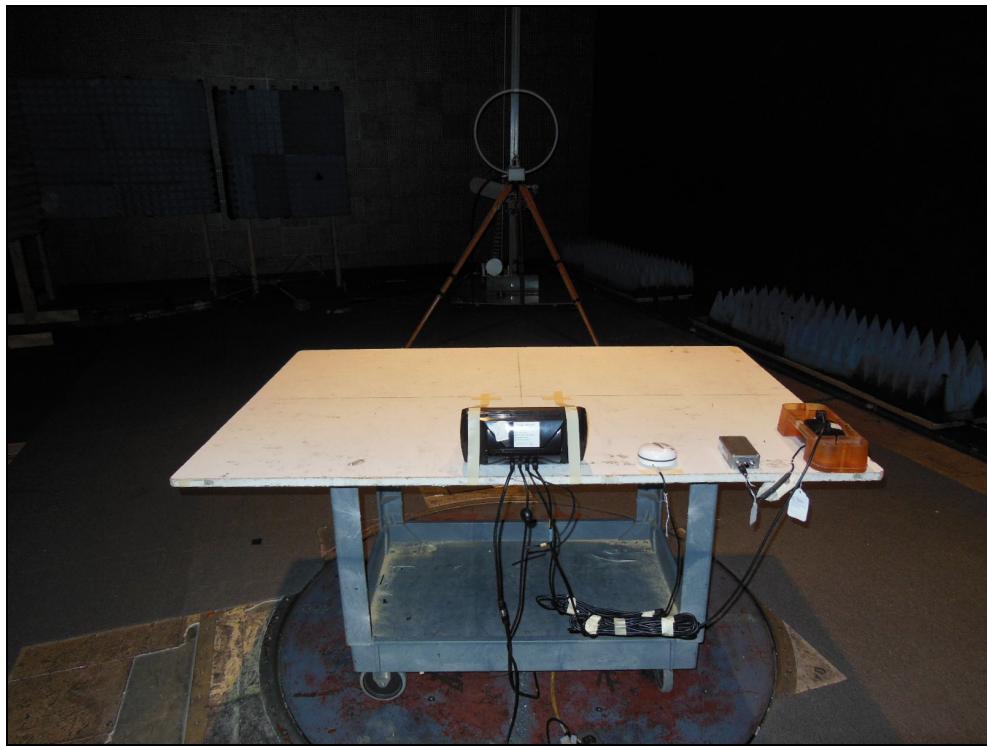


Figure 4.1.4-2: Radiated Emissions - Rear View – Below 30MHz



Figure 4.1.4-3: Radiated Emissions – Front View – Above 30MHz

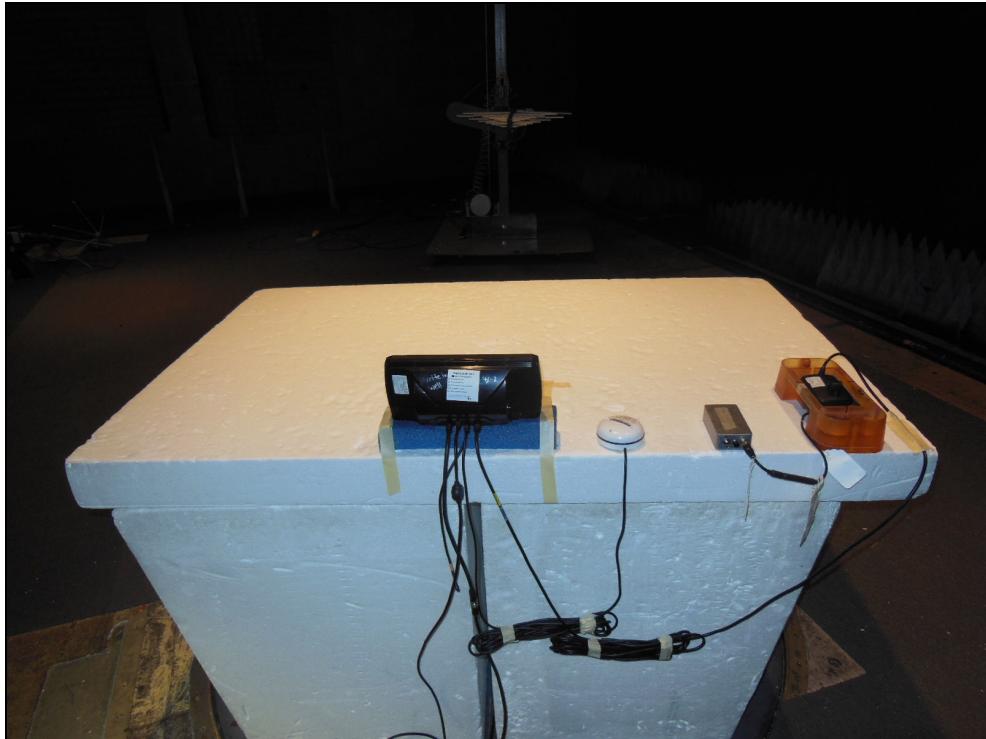


Figure 4.1.4-4: Radiated Emissions – Rear View – Above 30MHz

4.1.5 Test Data

Final tabulated radiated emissions data are reported in the Test Data Table below:

Test Parameters:

Test Date:	August 2, 2016	Temperature (°C)	24
Technician:	Wayne Orwig	Humidity (%)	42
Equipment Class:	Class B	Barometric Pressure (mBar)	1015
Tested Modes:	GPS active and depth gauge operating		
AC Input Power:	N/A		
DC Input Power:	12Vdc		

Test Data Table:

Measurement Distance:			150KHz-30MHz									
Frequency (MHz)	Measured Level (dBuV)		Antenna Polarity (H/V)	Antenna Height (cm)	Turntable Position (o)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	Pk	Qpk/Av					Pk	Qpk/Av	Pk	Qpk/Av	Pk	Qpk/Av
17.628		5.01	H	150	250	11.39	-----	16.40	-----	30.1	-----	13.7
23.397		4.40	H	150	185	10.62	-----	15.02	-----	35.0	-----	19.9

Qpk = Quasi-Peak Measurement or Limit (< 1GHz)

AV = Average Measurement or Limit (>1GHz)

Notes:

Test Data Table:

Measurement Distance:				30-2000MHz								
Frequency (MHz)	Measured Level (dBuV)		Antenna Polarity (H/V)	Antenna Height (cm)	Turntable Position (o)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	Pk	Qpk/Av					Pk	Qpk/Av	Pk	Qpk/Av	Pk	Qpk/Av
30.42		23.12	V	100	35	-12.21	-----	10.91	-----	54.0	-----	43.1
39		20.28	V	100	270	-13.72	-----	6.56	-----	54.0	-----	47.4
52.68		20.83	V	100	0	-13.65	-----	7.18	-----	54.0	-----	46.8
58.8		20.96	V	100	90	-13.75	-----	7.21	-----	54.0	-----	46.8
97.08		37.36	V	100	90	-13.43	-----	23.93	-----	54.0	-----	30.1
286.64		20.14	H	100	180	-9.27	-----	10.87	-----	54.0	-----	43.1

Qpk = Quasi-Peak Measurement or Limit (< 1GHz)

AV = Average Measurement or Limit (>1GHz)

Notes:

There were no significant emissions found above 1GHz.

4.2 Conducted Emissions

4.2.1 Conducted Emissions Test Site

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

A diagram of the room is shown below in figure 4.2.1-1:

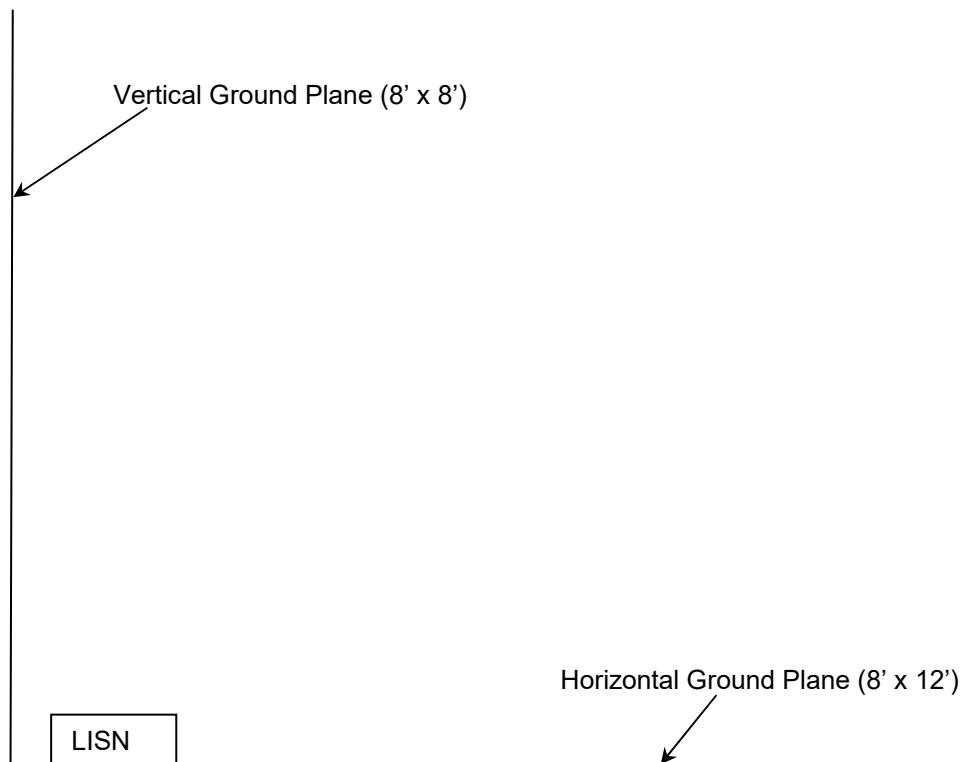


Figure 4.2.1-1: AC Mains Conducted EMI Site

4.2.2 Test Equipment

Table 4.2.2-1 Test Equipment – Conducted Emissions

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
RE112	Rohde & Schwarz	ESIB26	Receiver	836119/012	7/13/2016	7/13/2017
324	ACS	Belden	Cables	8214	5/2/2016	5/2/2017
494	Omega	iBTHX-W	amate Monitoring Equipment	9460211	8/1/2016	8/1/2018
3010	Rohde & Schwarz	ENV216	LISN	3010	7/11/2016	7/11/2017

NCR=No Calibration Required

4.2.3 Test Methodology

Conducted emissions were performed from 9kHz to 150kHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Applicable Limit - Corrected Reading

4.2.3.1 Test Criteria

The EUT must meet the Class B Limits as given in section 1.4.1.

4.2.3.2 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.
 The test method, standard, and/or test plan was deviated from for the following reason:

4.2.4 Test Setup Photographs

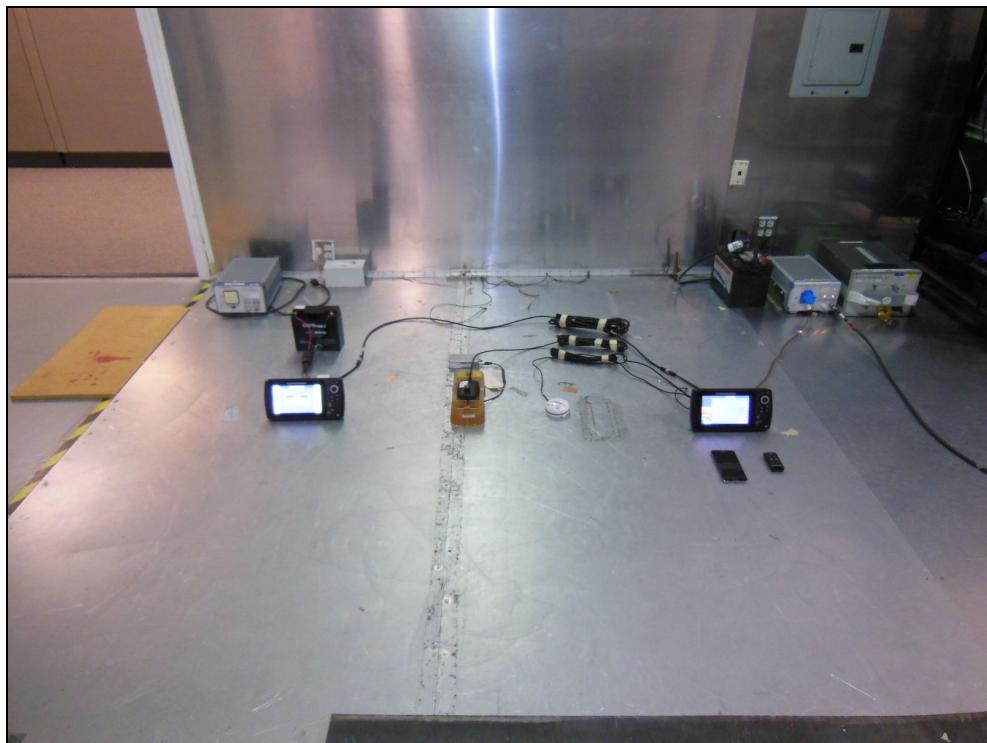


Figure 4.2.4-1: Conducted Emissions Test Setup – Front View

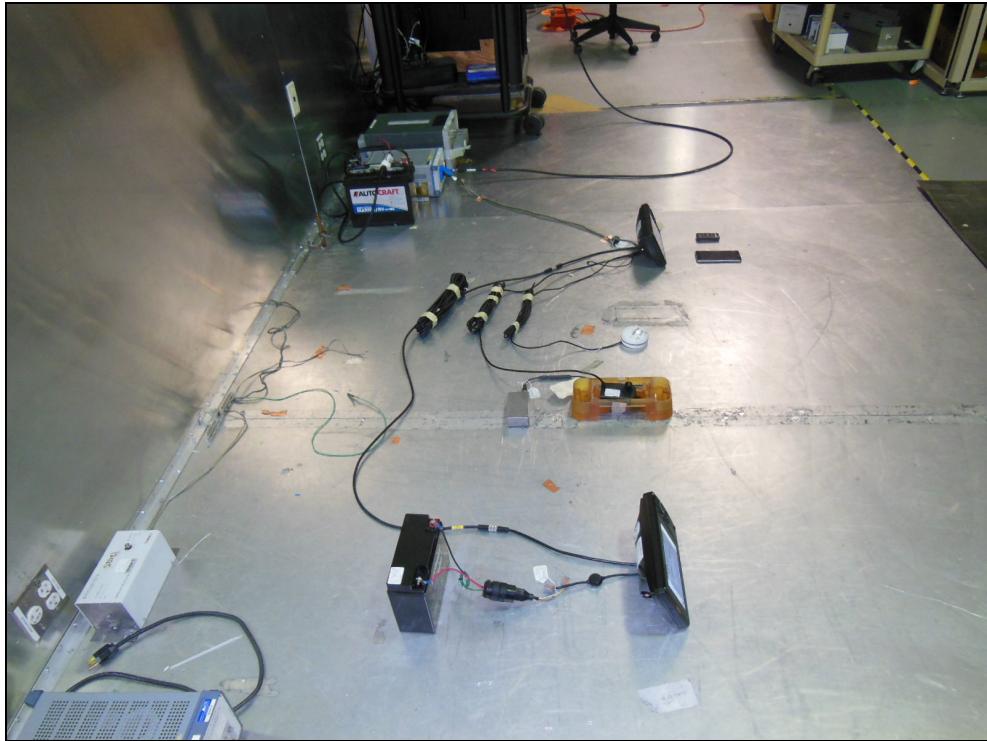


Figure 4.2.4-2: Conducted Emissions Test Setup – Side View

4.2.5 Test Data

Tabulated data is given in the Test Data Tables below.

Test Parameters:

Test Date:	July 25, 2016	Temperature (°C)	26.9
Technician:	Sean Vick	Humidity (%)	43.2
Equipment Class:	Class B	Barometric Pressure (mBar)	1014.3
Tested Modes:	EUT on; Monitoring depth; BT connected to phone and remote		
AC Input Power:	N/A		
DC Input Power:	12Vdc		

Tested Leads:

AC Mains – Number of Lines:
 DC Mains – Number of Lines: 4
 Telecom Port – Quantity:

Test Data Tables:

Check All That Apply to This Data						
Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.028106	---	23.24	---	---	L1	9.4
0.028106	28.53	---	74.85	46.32	L1	9.4
0.029962	---	49.49	---	---	L1	9.4
0.029962	49.31	---	73.70	24.39	L1	9.4
0.036012	---	24.93	---	---	L1	9.6
0.036012	34.12	---	70.51	36.39	L1	9.6
0.059914	---	41.91	---	---	L1	9.6
0.059914	41.81	---	62.37	20.56	L1	9.6
0.089882	---	33.03	---	---	L1	9.7
0.089882	33.24	---	56.56	23.32	L1	9.7
0.131148	---	7.16	---	---	L1	9.7
0.131148	10.67	---	51.64	40.97	L1	9.7

Notes:

<u>Check All That Apply to This Data</u>						
Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.029984	---	49.22	---	---	N	9.4
0.029984	49.13	---	73.69	24.56	N	9.4
0.059902	---	41.94	---	---	N	9.6
0.059902	41.78	---	62.37	20.59	N	9.6
0.089405	---	10.84	---	---	N	9.7
0.089405	14.83	---	56.64	41.81	N	9.7
0.089858	---	33.31	---	---	N	9.7
0.089858	33.32	---	56.57	23.25	N	9.7
0.135605	---	8.10	---	---	N	9.7
0.135605	12.41	---	51.23	38.82	N	9.7
0.142632	---	12.43	---	---	N	9.7
0.142632	15.58	---	50.61	35.03	N	9.7

Notes:

<u>Check All That Apply to This Data</u>						
Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
1.745191	---	2.56	---	---	L1	9.8
1.745191	22.24	---	50.00	27.76	L1	9.8
2.947996	---	-2.86	---	---	L1	9.8
2.947996	16.06	---	50.00	33.94	L1	9.8
3.731964	---	-4.19	---	---	L1	9.8
3.731964	15.72	---	50.00	34.28	L1	9.8
4.188878	---	-4.06	---	---	L1	9.9
4.188878	16.09	---	50.00	33.91	L1	9.9
6.758016	---	-0.65	---	---	L1	10.0
6.758016	13.45	---	50.00	36.55	L1	10.0
7.994056	---	2.68	---	---	L1	10.0
7.994056	11.34	---	50.00	38.66	L1	10.0

Notes:

<u>Check All That Apply to This Data</u>						
Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
2.971443	---	3.37	---	---	N	9.8
2.971443	19.55	---	50.00	30.45	N	9.8
3.463026	---	-4.05	---	---	N	9.8
3.463026	16.94	---	50.00	33.06	N	9.8
3.739379	---	-3.77	---	---	N	9.8
3.739379	16.28	---	50.00	33.72	N	9.8
5.875651	---	1.70	---	---	N	10.0
5.875651	15.61	---	50.00	34.39	N	10.0
6.034569	---	-0.52	---	---	N	10.0
6.034569	23.07	---	50.00	26.93	N	10.0
6.261623	---	-1.90	---	---	N	10.0
6.261623	21.27	---	50.00	28.73	N	10.0

Notes:

5.0 Harmonic Current Emissions

5.1 Test Justification

- No justification - The EUT was tested per the appropriate test methods and test plan.
- The test method, standard, and/or test plan was deviated from for the following reason:

This test is not applicable, because the EUT is not powered through an AC Mains power supply.

6.0 Voltage Fluctuations & Flicker

6.1 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.
 The test method, standard, and/or test plan was deviated from for the following reason:

This test is not applicable, because the EUT is not powered through an AC Mains power supply.

SECTION C: IMMUNITY – TEST INFORMATION AND RESULTS

7.0 Electrostatic Discharge Immunity

7.1 Test Site Description

The EUT was configured and connected to satisfy its functional requirements.

For a table top configuration, the EUT was placed on an insulating support of 0.5mm in the center of the Horizontal Coupling Plane (HCP). The HCP laid flat on a non-conductive table measuring 1.6 meters x 0.8 meters x 0.8 meters. The non-conductive table was placed on a 16 feet x 8 feet Ground Reference Plane (GRP). The Vertical Coupling Plane was placed 10cm from the EUT and insulated from the HCP.

For a floor standing configuration the EUT was placed on a 10cm insulated support. The non-conductive spacer was placed on a 16 feet x 8 feet Ground Reference Plane (GRP). The Vertical Coupling Plane was placed 10cm from the EUT.

Both the HCP and the VCP were connected to the GRP via cables with 470kΩ resistors located at each end. The ground lead of the ESD generator was also connected to the GRP.

7.2 Test Equipment

Table 7.2-1: Test Equipment List

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
582	Kikusui	KES4021A	ESD Gun	SA003046	4/28/2016	4/28/2017
144	Omega	RH411	Climate Monitoring Equipment	H0103373	7/24/2014	7/24/2016

NCR = No Calibration Required

7.3 Test Methodology

IEC 61000-4-2 - Electromagnetic compatibility (EMC) - Part 4. Testing and measurement techniques - Section 4.2 Electrostatic discharge immunity test - Basic EMC Publication, was the guiding document for this test. The purpose of this test is to verify the immunity of single devices or systems against electrostatic discharges (ESD) generated by an operator or object touching the equipment, or by objects or persons coming into contact in the vicinity of the equipment.

Only areas of the EUT that are accessible to the user are considered for the evaluation.

Direct Contact Discharge

Devices with accessible conductive surfaces are subject to direct contact discharges. Each test point identified was subjected to 10 discharges of both positive and negatives impulses.

Indirect Contact Discharge

The EUT was subjected to indirect contact discharges to a horizontal coupling plane (HCP). At least 10 single discharges in both polarities were applied to the EUT via the HCP on all sides and at a separation distance of 10cm. In addition the EUT was subjected indirect discharges to a vertical coupling plane (VCP). At least 10 single discharges in both polarities were applied to the EUT via the VCP on all sides and at a separation distance of 10cm.

Air Discharge

Insulated surfaces of the EUT that are accessible were subjected to air discharges. Each test point is subjected to 10 discharges of each polarity.

7.3.1 Test Criteria

EN 60945:2002 requires performance criterion B to be met as described in section 1.4.2.

7.3.2 Test Justification

- No justification - The EUT was tested per the appropriate test methods and test plan.
- The test method, standard, and/or test plan was deviated from for the following reason:

7.4 Test Setup Photograph



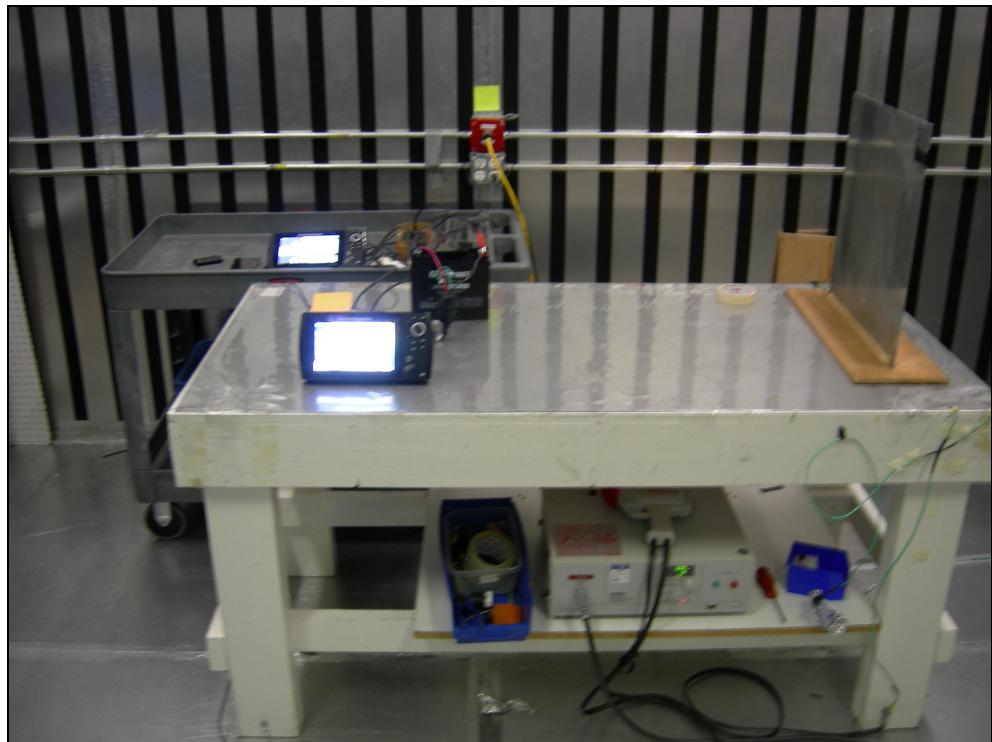



Figure 7.4-1: Test Setup Photograph

7.5 ESD Data Sheet

Test Point Photograph:

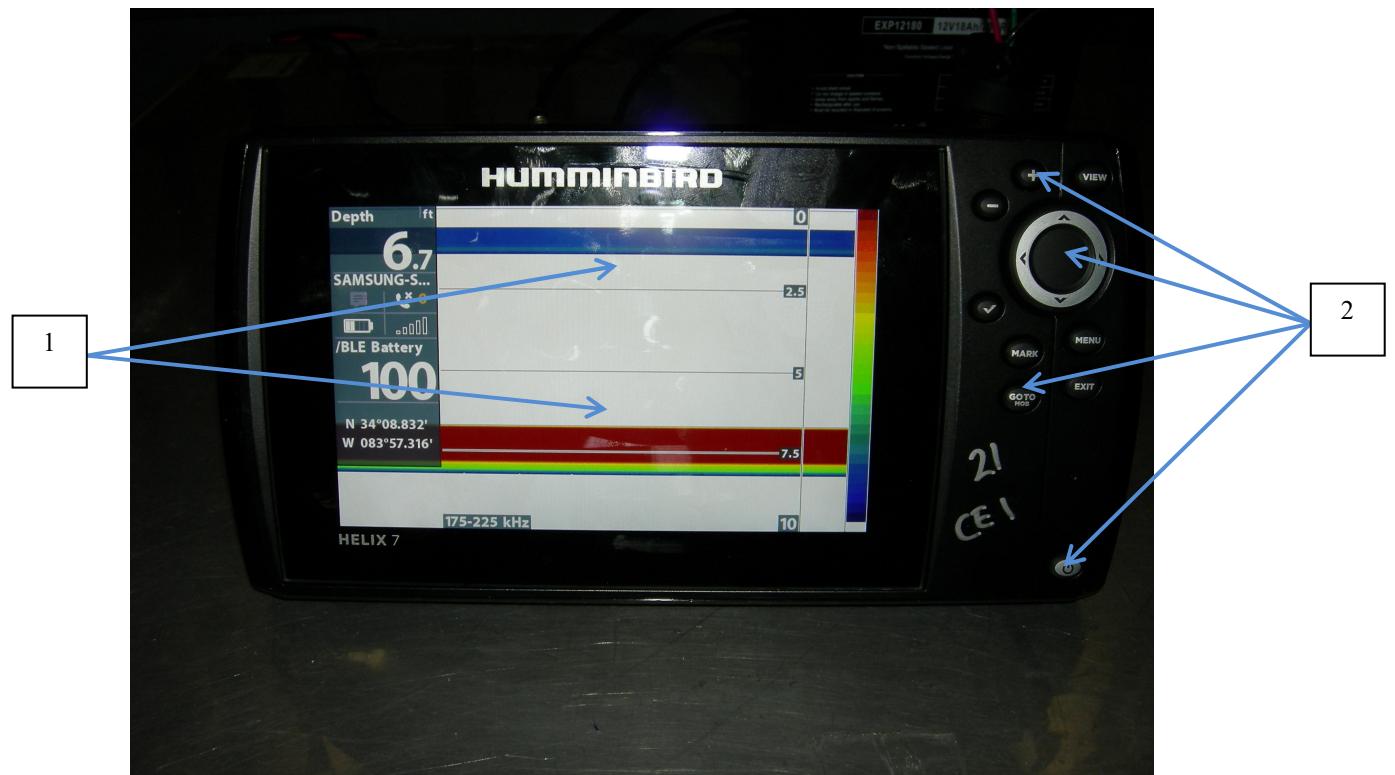

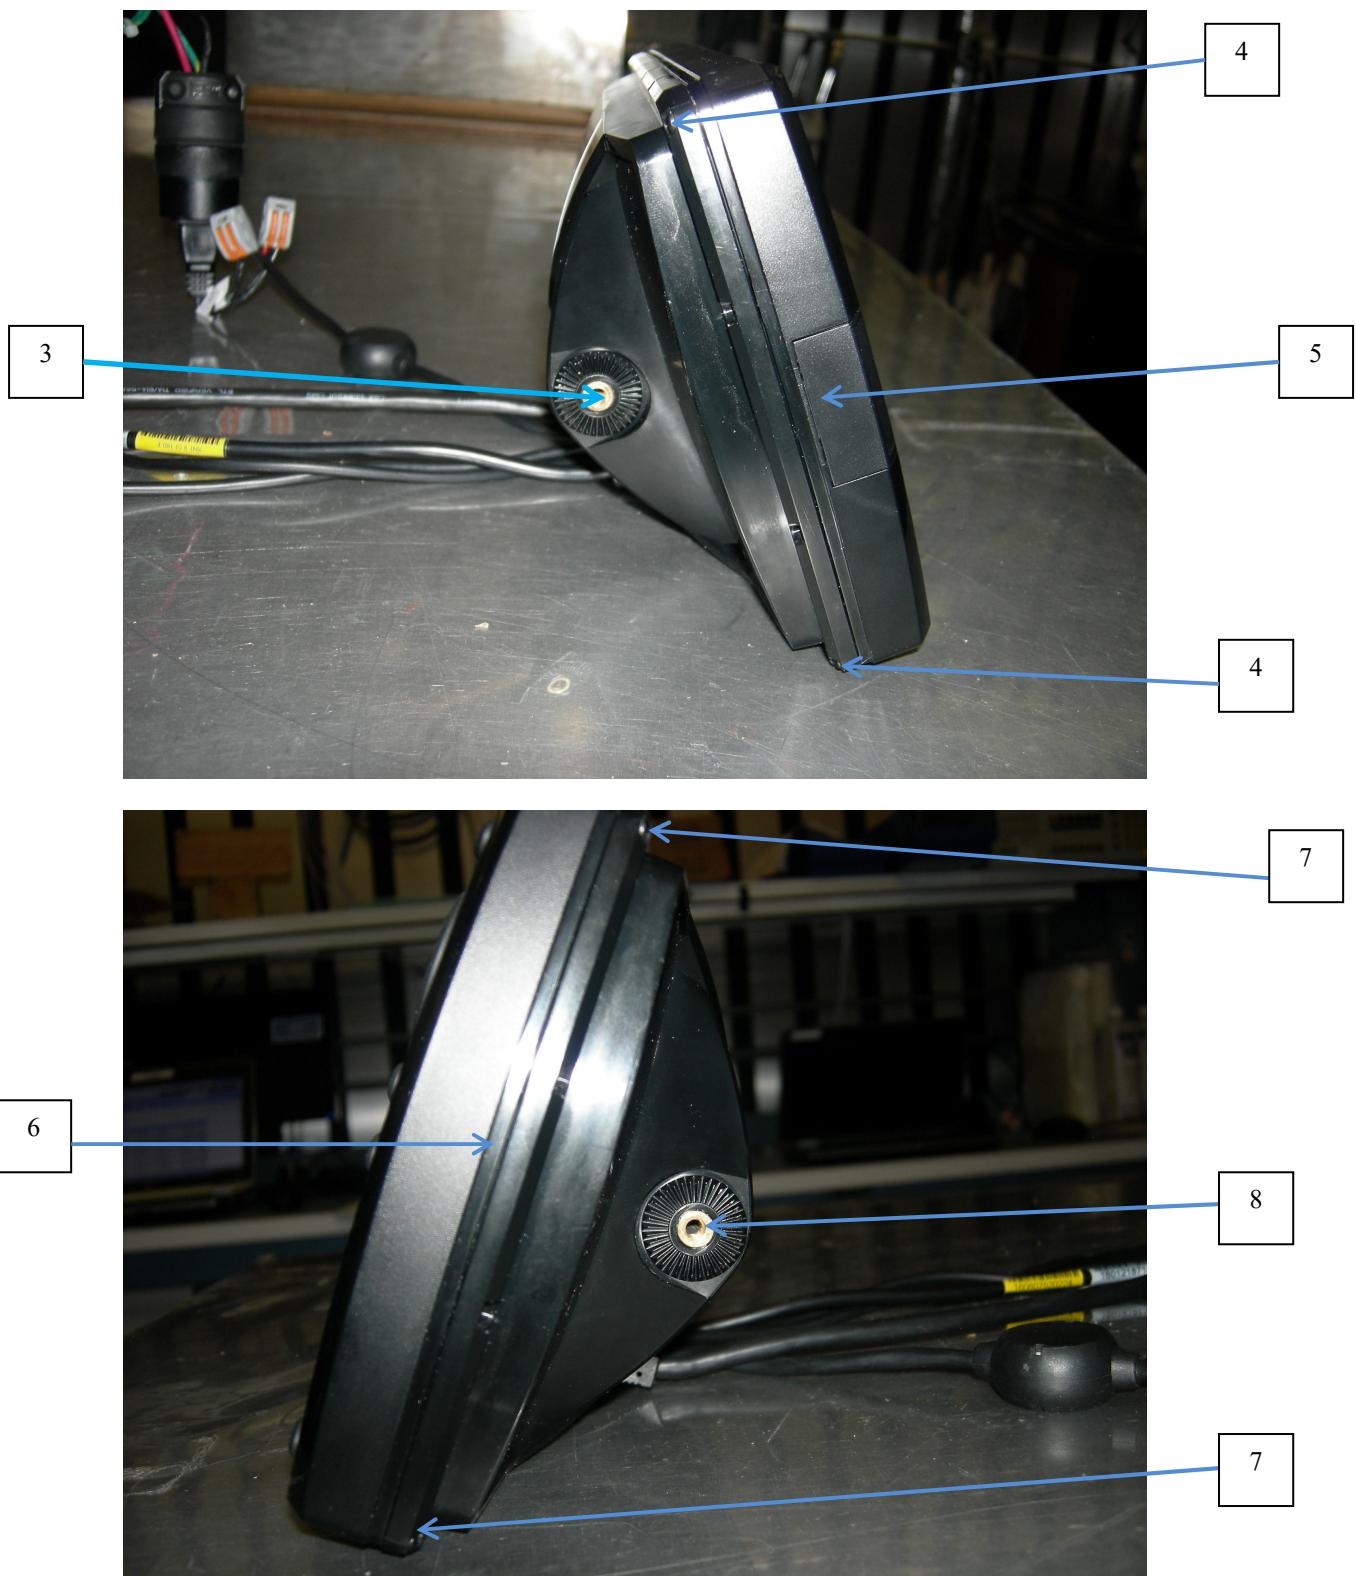

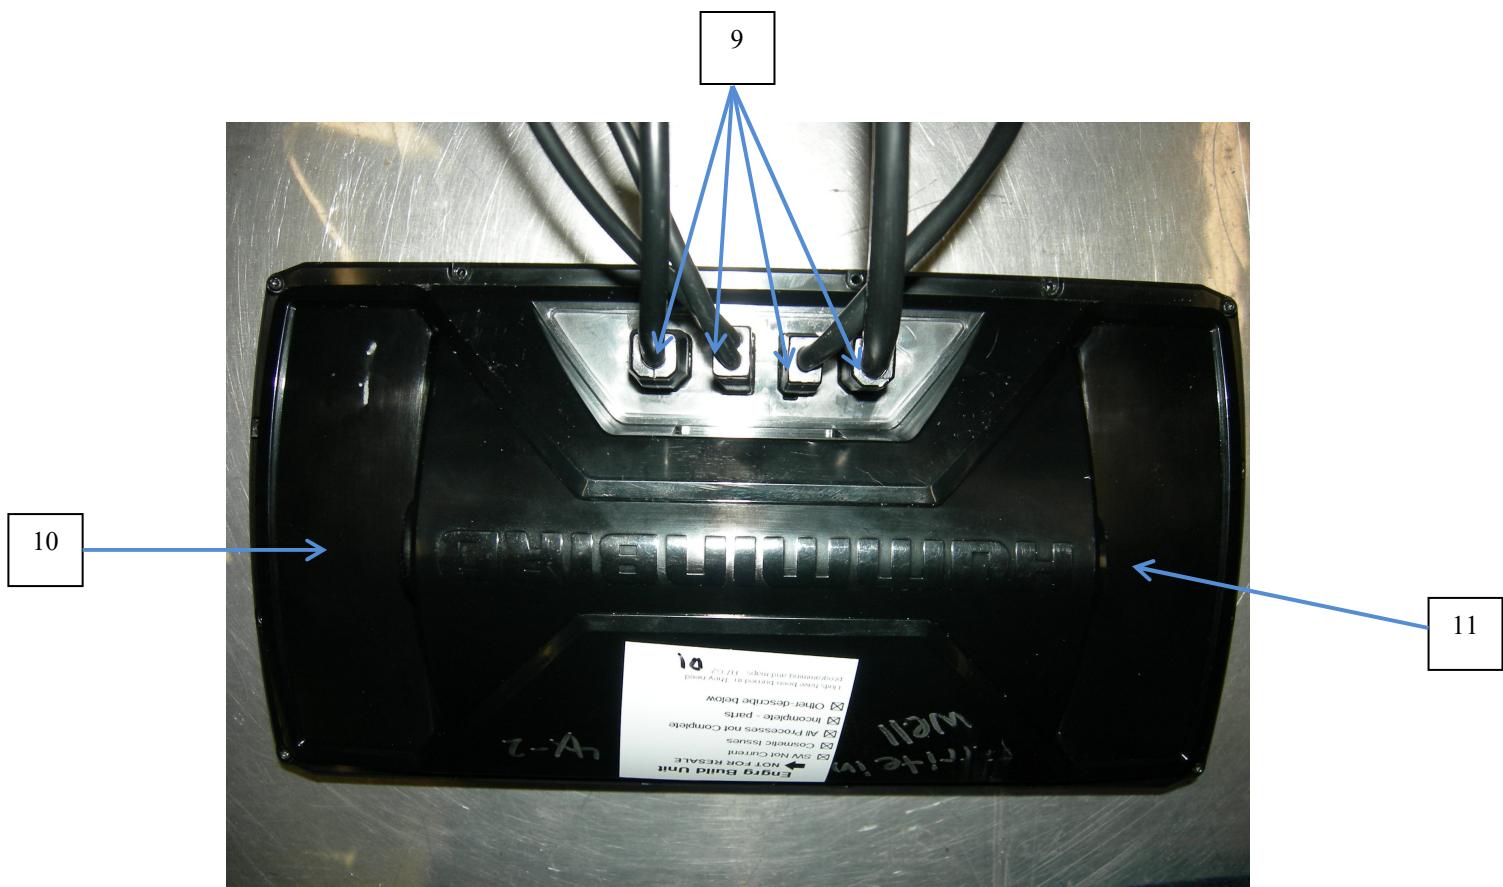

Test Point Selection:

TEST POINT#	DESCRIPTION	TYPE (C/A)	TEST POINT#	DESCRIPTION	TYPE (C/A)
1	EUT display screen	Air	11	EUT chassis rear right side	Air
2	EUT user interface buttons	Air			
3	Left mounting bracket connection	Contact			
4	EUT chassis rear screws: left	Contact			
5	EUT chassis left side seam	Air			
6	EUT chassis right side seam	Air			
7	EUT chassis rear screws :right	Contact			
8	Right mounting bracket connection	Contact			
9	EUT cable connections	Air			
10	EUT chassis rear left side	Air			

7.6 Test Data

Test Parameters:

Test Date:	7-27-2016	Temperature (°C)	22
Technician:	Chris O'Steen	Humidity (%)	40
Equipment Class:	N/A	Barometric Pressure (mBar)	1017
<input checked="" type="checkbox"/> Pre-test Verification Complete			
Tested Modes:	EUT on; Monitoring depth; BT connected to phone and remote		
AC Input Power:	N/A	VCP Resistor Value Check:	951k (Ohms)
DC Input Power:	12VDC	HCP Resistor Value Check:	945k (Ohms)

Indirect Contact Discharge:

Check All That Apply to This Data					
Plane:	Polarity:	Tested Levels:			
<input type="checkbox"/> Vertical Coupling Plane	<input type="checkbox"/> Positive	<input checked="" type="checkbox"/> 2kV	<input type="checkbox"/> 8kV		
<input type="checkbox"/> Horizontal Coupling Plane	<input type="checkbox"/> Negative	<input checked="" type="checkbox"/> 4kV	<input type="checkbox"/> 15kV		
<input checked="" type="checkbox"/> Both	<input checked="" type="checkbox"/> Both	<input type="checkbox"/> 6kV	<input type="checkbox"/> Enter Other Level Here		
Side	Result	Observation (Describe any detectable event)			
Front	Pass				
Back	Pass				
Left	Pass				
Right	Pass				
Bottom	Pass				

Air and Direct Contact Discharge:

Check All That Apply to This Data						
Polarity:	Tested Levels:					
<input type="checkbox"/> Positive	<input checked="" type="checkbox"/> 2kV	<input checked="" type="checkbox"/> 8kV				
<input type="checkbox"/> Negative	<input checked="" type="checkbox"/> 4kV	<input type="checkbox"/> 15kV				
<input checked="" type="checkbox"/> Both	<input checked="" type="checkbox"/> 6kV	<input type="checkbox"/> Enter Other Level Here				
Test Point	Discharge Type	Result	Observation (Describe any detectable event)			
1	Air	Pass				
2	Air	Pass				
3	Contact	Pass				
4	Contact	Pass				
5	Air	Pass				
6	Air	Pass				
7	Contact	Pass				
8	Contact	Pass				
9	Air	Pass				
10	Air	Pass				
11	Air	Pass				

8.0 Radio-Frequency Electromagnetic Fields

8.1 Test Site Description

The radiated fields test was performed in the semi or fully-anechoic chamber described in section 4.1.1.2 or 4.1.1.3 respectively.

8.2 Test Equipment

Table 8.2-1: Test Equipment List

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Calibration Performed Date	Calibration Due Date
197	Amplifier Research	DC6080	Coupler	307006	06-17-2016	06-17-2017
1115	Varian	VZC6961G1	Amplifier	884	NCR	NCR
329	A.H.Systems	SAS-571	Antennas	721	07-22-2015	07-22-2017
354	ETS Lindgren	3142C	Antennas	78838	NCR	NCR
370	IFI	CMX5002	Amplifier	L364-0407	NCR	NCR
494	Omega	iBTHX-W	Climate Monitoring Equipment	9460211	12/8/2014	12/8/2016
564	United Microwave Products, Inc	AO-190-00.36.0	Cables	564	07-29-2016	07-29-2017
565	United Microwave Products, Inc	OO-190-15.00.0	Cables	565	NCR	NCR
566	United Microwave Products, Inc	OO-190-00-120.0	Cables	566	NCR	NCR
642	Fairview Microwave	FMC0101951-200CM	Cables	N/A	NCR	NCR
711	Hewlett Packard	8648B	Signal Generators	3623A01926	07-25-2016	07-25-2017
1112	Wandel & Goltermann	BN2244/21	Probes	H0006	12/3/2015	12/3/2016
1201	Wandel & Goltermann	2244/99.22	Probes	W-0004	12/3/2015	12/3/2016
711	Hewlett Packard	8648B	Signal Generators	3623A01926	07-25-2016	07-25-2017
RE89	Amplifier Research	25S1G4A	Amplifiers	324609	NCR	NCR

NCR = No Calibration Required

8.3 Test Methodology

IEC 61000-4-3 Ed. 3.- Electromagnetic compatibility (EMC) - Part 4. Testing and measurement techniques - Section 3: Radiated, radio-frequency, electromagnetic field immunity test, was the guiding document for this test. The purpose of this test is to verify the immunity of single devices or systems when subjected to radio-frequency electromagnetic field.

The EUT was configured and connected to satisfy its functional requirements. One representative sample was placed on the table and rotated 90° to expose all side of the EUT to the radiofrequency electromagnetic field. The table is non-conductive measuring 1.5 meters x 1.0 meters x 0.8 meters. The non-conductive table was placed 3 meters from the radiating antenna.

The frequency ranges to be considered are swept with the signal 80% amplitude modulated with a 1kHz AM sine wave, pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range is swept incrementally, the step size shall not exceed 1% of fundamental with linear interpolation between calibrated points.

The test shall normally be performed with the generating antenna facing each of the four sides of the EUT, however if the equipment can be used in different orientations, the test shall be performed on all sides, 6 total.

The polarization of the field generated by each antenna necessitates testing each side twice, once with the antenna positioned vertically and again with the antenna positioned horizontally.

8.3.1 Test Criteria

EN 60945:2002 requires criterion A to be met as described in section 1.4.2.

8.3.2 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.
 The test method, standard, and/or test plan was deviated from for the following reason:

8.4 Test Setup Photographs

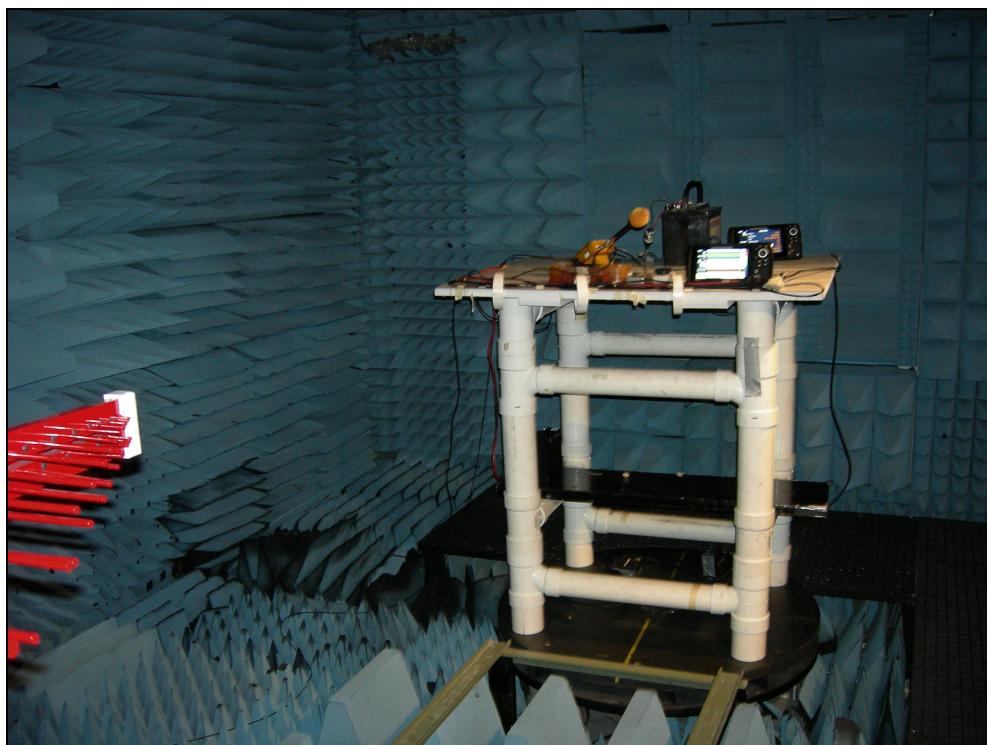


Figure 8.4-1: Test Setup Photograph

8.5 Test Results

Test Parameters:

Test Date:	July 31, 2016	Temperature (°C)	24
Technician:	Chris O'Steen	Humidity (%)	45
Equipment Class:	N/A	Barometric Pressure (mBar)	1017
Tested Modes:	GPS, BLE, BT, and depth simulator active and monitored.		
AC Input Power:	N/A	<input checked="" type="checkbox"/> Pre-test Verification Complete	
DC Input Power:	12Vdc		

Test Data:

<u>Check All That Apply to This Data</u>			
Polarity	Field Strength:	Freq. Band:	Dwell Time
<input type="checkbox"/> Horizontal	<input type="checkbox"/> 3V/m	<input type="checkbox"/> 80-1000MHz	<input type="checkbox"/> 1 Second
<input type="checkbox"/> Vertical	<input checked="" type="checkbox"/> 10V/m	<input type="checkbox"/> 80-2700MHz	<input checked="" type="checkbox"/> 2.86 Seconds (80MHz – 1GHz)
<input checked="" type="checkbox"/> Both	<input type="checkbox"/> 8V/m	<input checked="" type="checkbox"/> 80MHz - 2GHz	<input checked="" type="checkbox"/> 8.6 Seconds (1GHz – 2GHz)
	<input type="checkbox"/> Enter Other Level Here		
Azimuth	Result	Observation (Describe any detectable event)	
0	Pass		
90	Pass		
180	Pass		
270	Pass		

Notes:

Testing was completed using a 400Hz modulation.

Spot frequencies less than 30MHz were seen during Conducted RF Immunity, those above 30MHz were seen during Radiated Fields Immunity as follows; 50MHz for Ethernet clock, 800MHz for Main internal processor, 1575.42MHz for the GPS receiver, and 2.4GHz for the Bluetooth radio.

9.0 Electrical Fast Transient/Bursts

9.1 Test Site Description

The EUT was configured and connected to satisfy its functional requirements. The EUT was placed in the center of a non-conductive support measuring 125cm x 96cm x 10 cm. The non-conductive support is placed on a 8 feet x 8 feet Ground Reference Plane (GRP). A minimum distance of 50 cm between the EUT and all other conductive structures was maintained. A minimum distance of 50 cm between the coupling clamp and all other conductive structures, except the GRP, was maintained. A 10 cm insulated support was placed between the capacitive coupling clamp and the GRP. The GRP was bonded to the EFT/B generator.

The input power port of the EUT was tested using the coupling/decoupling network. The +/-1kV bursts were applied to all lines individually as well as simultaneously.

The bursts were applied to the signal/control line ports, if present, using the capacitive coupling clamp.

9.2 Test Equipment

Table 9.2-1: Test Equipment List

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Calibration Performed Date	Calibration Due Date
474	Keytek	EMC PRO	General Lab Equipment	9808246	10/7/2015	10/7/2016
62	Haefely Trench	EFT Clamp	Immunity Equipment	None	07-15-2016	07-15-2017

NCR = No Calibration Required

9.3 Test Methodology

IEC 61000-4-4 - Electromagnetic compatibility (EMC) - Part 4. Testing and measurement techniques - Section 4: Electrical fast transient/burst immunity test - Basic EMC Publication., was the guiding document for this test. The purpose of this test is to verify the immunity of single devices or systems when subjected to types of transient disturbances such as those originating from switching transients such as interruption of inductive loads or relay contact bounce.

9.3.1 Test Criteria

EN 60945:2002 requires criterion B to be met as described in section 1.4.2.

9.3.2 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.
 The test method, standard, and/or test plan was deviated from for the following reason:

9.4 Test Setup Photographs

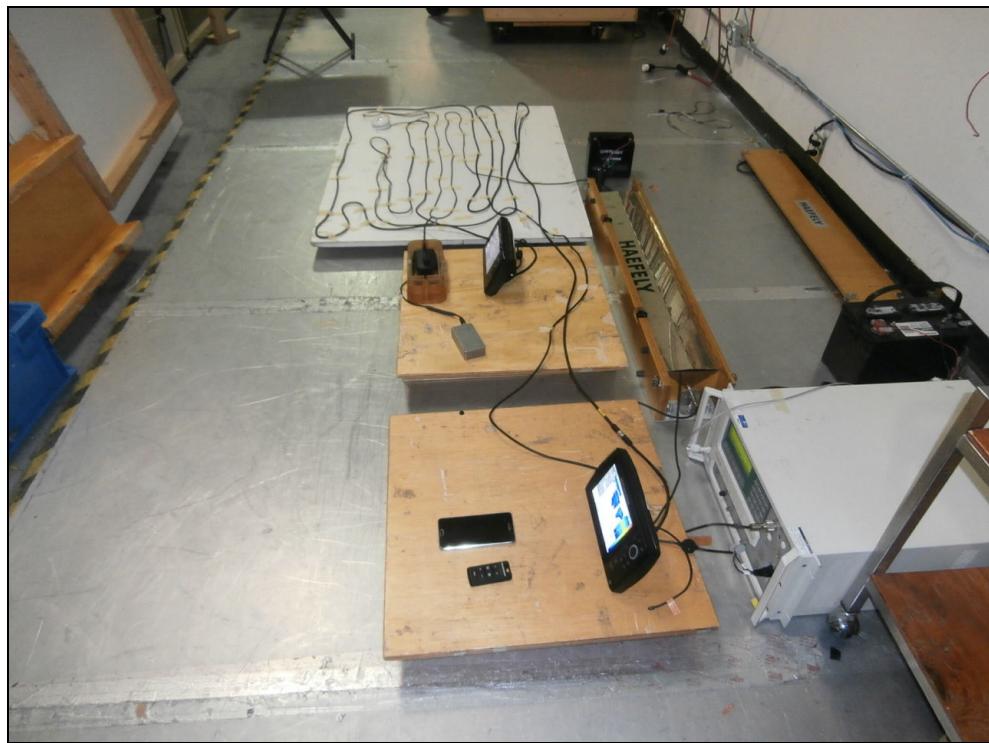


Figure 9.4-1: Test Setup Photograph



Figure 9.4-2: Test Setup Photograph

9.5 Test Results

Test Parameters:

Test Date:	July 26, 2016	Temperature (°C)	25.0
Technician:	Jaime Smith	Humidity (%)	46.2
Equipment Class:	N/A	Barometric Pressure (mBar)	1015.4
Tested Modes:	GPS, Depth, BTE, BLE, and temp running.		
AC Input Power:	N/A	<input checked="" type="checkbox"/> Pre-test Verification Complete	
DC Input Power:	12VDC		

Signal Line Test Data:

<u>Check All That Apply to This Data</u>			
Polarity:	Tested Levels:		
<input type="checkbox"/> Positive	<input checked="" type="checkbox"/> .25kV		
<input type="checkbox"/> Negative	<input checked="" type="checkbox"/> .5kV		
<input checked="" type="checkbox"/> Both	<input checked="" type="checkbox"/> 1kV		
	<input type="checkbox"/> 2kV		
	<input type="checkbox"/> Enter Other Level Here		
Signal Line	Result	Observation (Describe any detectable event)	
GPS	Pass		
Transducer	Pass		
Ethernet	Pass		

Notes:

EFT testing per 60945 with burst duration at 3 minutes 5KHz repetition.

10.0 Surge Immunity

10.1 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.
 The test method, standard, and/or test plan was deviated from for the following reason:

This test is not applicable, because the EUT is not powered through an AC Mains power supply.

11.0 Radio-Frequency Common-Mode Immunity

11.1 Test Site Description

The EUT was configured and connected to satisfy its functional requirements. The EUT was placed on an insulating support of 0.1m height above a ground reference plane. All relevant cables were provided with the appropriate coupling and decoupling devices at a distance between 0.1m and 0.3m from the projected geometry of the EUT on the Ground Reference Plane (GRP).

11.2 Test Equipment

Table 11.2-1: Test Equipment List

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
448	IFR	2023A	Signal Generators	202302/190	2/11/2016	2/11/2017
14	IFI	PS5000	Power Supplies	0492-4147	NCR	NCR
15	IFI	AMP5580	Amplifiers	0492-4147	NCR	NCR
471	Bird Technologies Group	150-A-FFN-06	Attenuators	914	NCR	NCR
457	Com Power	CDN-M2-25	Coupler	511023	7/13/2016	7/13/2017
364	Amplifier Research	DC2600A	Coupler	322466	NCR	NCR
96	Chase	1000-M3-25	CDN's	9806	3/10/2016	3/10/2017
93	Chase	8101	Clamp	65	5/6/2016	5/6/2017

NCR = No Calibration Required

11.3 Test Methodology

IEC 61000-4-6 3rd Ed. - Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 6: Immunity to conducted disturbances, induced by radio- frequency fields, was the guiding document for this test. The purpose of this test is to verify the immunity of single devices or systems when subjected to radio-frequency electromagnetic field.

The EUT was caused to operate as intended and monitored for changes in performance. The frequency range is swept from 150 kHz to 80MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1kHz AM sine wave, pausing to adjust the RF signal level or to switch coupling devices as necessary. The rate of sweep shall not exceed 1.5×10^{-3} decades. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

11.3.1 Test Criteria

EN 60945:2002 requires criterion A to be met as described in section 1.4.2.

11.3.2 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.
 The test method, standard, and/or test plan was deviated from for the following reason:

11.4 Test Setup Photographs

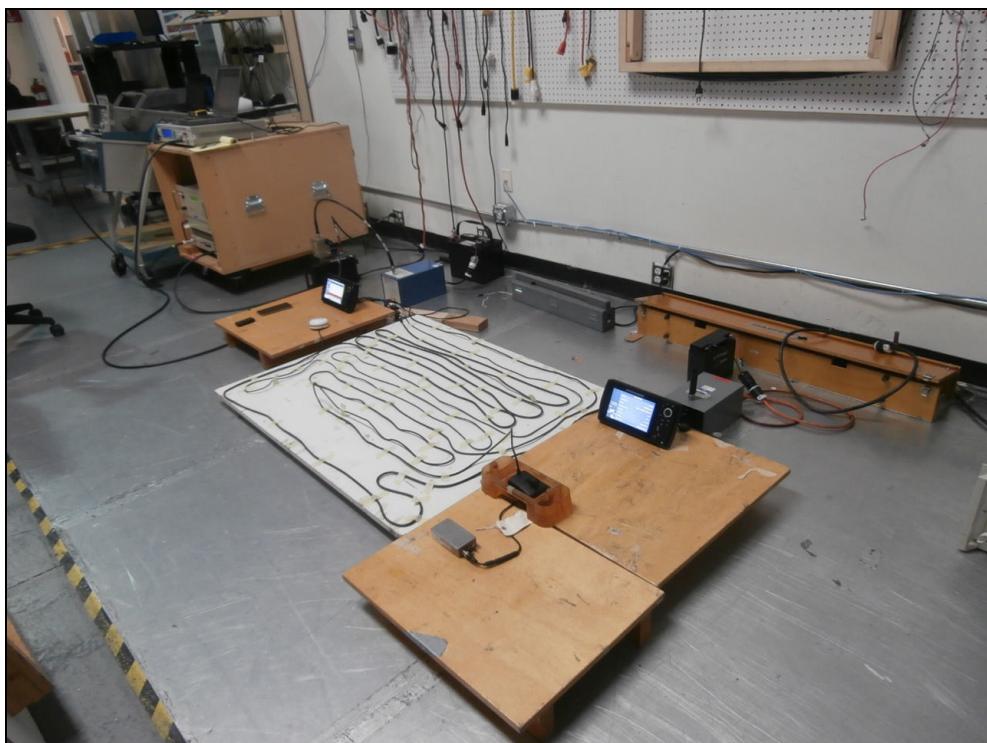


Figure 11.4-1: Test Setup Photograph

11.5 Test Results

Test Parameters:

Test Date:	July 26, 2016	Temperature (°C)	25.0
Technician:	Jaime Smith	Humidity (%)	46.2
Equipment Class:	N/A	Barometric Pressure (mBar)	1015.4
Tested Modes:	EUT on; Monitoring depth; BT connected to phone and remote		
AC Input Power:	N/A	<input checked="" type="checkbox"/> Pre-Test Verification	
DC Input Power:	12VDC		

Signal Line Test Data:

Check All That Apply to This Data

Test Level: Freq. Band:
 3Vrms .150-80MHz
 10Vrms Enter Other Band Here
 15Vrms
 Enter Other Level Here

Signal Line	Result	Observation (Describe any detectable event)
GPS	Pass	
Transducer	Pass	
Ethernet	Pass	

Notes:

CI testing was performed with a 400Hz modulation. The spot frequencies were with 400Hz modulation at 10Vrms.

Spot frequency test at 10Vrms at 2.0, 3.0, 4.0, 6.2, 8.2, 12.6, 16.5, 18.8, 22 and 25 (MHz) discrete frequencies.

Backlight boost controller: 973 KHz

5V Buck regulator: 1.15 MHz

LCD Bias controller: 1.25 MHz

Boost switcher: 1.95 MHz

Power manager: 2.26 MHz

AM3354 TCXO: 24 MHz

DSP TCXO: 25 MHz

GPS TCXO: 26 MHz

Display clock: 29 MHz

Ethernet Clock: 50 MHz

12.0 Power Frequency Magnetic Fields Immunity

12.1 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.
 The test method, standard, and/or test plan was deviated from for the following reason:

This test is not applicable, because the EUT does not employ magnetically sensitive components.

13.0 Voltage Dips and Interruptions

13.1 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.
 The test method, standard, and/or test plan was deviated from for the following reason:

This test is not applicable, because the EUT is not powered through an AC Mains power supply.

SECTION D: MEASUREMENT UNCERTAINTY

General

Measurement Uncertainty is based on the following publications:

- CISPR 16-4-2: Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements
- The Guide to the Expression of Uncertainty in Measurement(GUM): 1995
- ANSI / NCSL Z540.2-1997 (R2002) U.S. Guide to Expression of Uncertainty in Measurement

Calculations for measurement uncertainty are available upon request.

Emissions:

Test Method	U_{Lab}	U_{CISPR}	Uncertainty Units
Radiated Emissions 30MHz-1000MHz	3.68	5.2	dB
Radiated Emissions 30MHz to 200MHz	3.79	5.2	dB
Radiated Emissions 200 to 1000MHz	3.62	5.2	dB
Radiated Emissions 1-18GHz	3.65	---	dB
Conducted Emissions .150k-30MHz	1.52	3.6	dB
Radiated Disturbances 5MHz to 30MHz	2.81	4.5	dB
Radiated Disturbances 30MHz to 950MHz	2.21	4.5	dB
Harmonic Current Emissions	1.7	---	%
Voltage Fluctuations & Flicker	1.7	---	%
Insertion Loss/Internal Calibrations	.65	---	dB
Radiated Immunity 80-1000MHz	1.21	---	dB
Conducted Immunity .150-80MHz	1.64	---	dB
Frequency Interpolations	.81 (ave)	---	dB

NOTE U_{CISPR} resembles a value of measurement uncertainty for a specific test, which was determined by considering uncertainties associated with the quantities listed in CISPR 16-4-2:2003 Section 4.2. Where no value is given for U_{CISPR} the procedure below does not apply.

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If U_{Lab} is less than or equal to U_{CISPR} in Table 5.0-1, then:

- compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

If U_{Lab} is greater than U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance, increased by $(U_{Lab} - U_{CISPR})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance, increased by $(U_{Lab} - U_{CISPR})$, exceeds the disturbance limit.

The ACS calculated MU is much less than the internationally accepted MU, therefore an adjustment to the measured result as mentioned above is not necessary.

Immunity

The EUT was subjected to the appropriate test levels required by the standard with a confidence level of 95%(k=2).

SECTION E: CONCLUSION

The EUT is determined to meet the requirements as defined in the applicable regulations.