



For Scope of Accreditation Under Certificate Number: AT-2021



## EMC Technical Report

**Prepared For: Johnson Outdoors Marine Electronics, Inc.**

**Model Covered: HELIX 7 CHIRP SI GPS G2**

**Model Variants: HELIX 7X CHIRP DI G2, HELIX 7X CHIRP GPS G2,  
HELIX 7X CHIRP DI GPS G2**

**In Accordance with the:  
Electromagnetic Compatibility Directive – 2014/30/EU**

**Immunity Product Standard: EN 60945:2002**

**Emissions Product Standard(s):  
EN 60945:2002**

**ACS Report: 16-0277.C08.2B**

**Report Revision: B**

**Report Issue Date: August 3, 2016**

**Project Manager:**

A handwritten signature in black ink that appears to read "Sean Vick".

**Sean Vick**  
EMC Technician  
Advanced Compliance Solutions, Inc.

**Reviewed by:**

A handwritten signature in black ink that appears to read "Forrest Duncan".

**Forrest Duncan**  
Operations Manager Commercial EMC  
Advanced Compliance Solutions, Inc.

***This report must not be used by the client to claim product certification, approval, or endorsement  
by ANAB, NIST, or any agency of the Federal Government.***

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 42 pages**

## REVISION HISTORY

Report Number: 16-0277.C08.2B

Manufacturer: Johnson Outdoors Marine Electronics, Inc.

Model: HELIX 7 CHIRP SI GPS G2

# Project Information Sheet

ACS Project: 16-0277.C08.2B

---

## Applicant Details

**Manufacturer:** Johnson Outdoors Marine Electronics, Inc.

**Street Address:** 678 Humminbird Lane

**City, State/Province and Postal Code:**  
Eufaula, AL 36027

**Country:** USA

**Contact:** Seth Bergman

**Phone:** 334-687-6613

**Fax:**

**Email:** sbergman@johnsonoutdoors.com

## Sample Information

**Model:** HELIX 7 CHIRP SI GPS G2 (410310-1M)

**Model Variant(s):** HELIX 7X CHIRP DI G2, HELIX 7X CHIRP GPS G2, HELIX 7X CHIRP DI GPS G2

**Environment of Use:** Residential

**Sample Receive Date:** June 20, 2016

**Sample Receive Condition:** Good

**Test Mode Description:** Battery Powered; GPS Active; Sonar mode measuring 6ft

**Unacceptable Degradation (Provided by Mfg.):** The Depth reading should stay within +/- 1ft. The manufacturer declares an exclusion band in the range 195kHz to 205kHz range since the device is tuned to and designed to operate at 200kHz during normal operation.

**Highest Data Rate:** 1.575GHz

**Source:** GPS Receiver

---

## Product Description

The Humminbird Helix 7 Gen 2 is a Sonar/Fishfinder product to be used in the marine environment. Product has a 7" display, 10 keypad buttons and displays Sonar return information on the screen. The device is mounted on the main deck/consoles of small recreational vessels in an exposed environment (directly exposed to the weather).

The model variants are defined as follows, per the manufacturer:

- HELIX 7X CHIRP DI G2 (410280-1M)
- HELIX 7X CHIRP GPS G2 (410290-1M)
- HELIX 7X CHIRP DI GPS G2 (410300-1M)

---

## Test Information

**Test Start Date:** June 20, 2016

**Test End Date:** June 24, 2016

**Emissions Pre-scan Site:** SAC

**Final Emissions Site:** SAC

**EMI Freq. Band:** 10kHz - 2GHz

**RFI Site:** FAC

**Radiated Emissions Equipment Class:** Class B

**Harmonic Current EMI Class:** N/A

---

## Test Methods Applied

(Check all that apply)

- CISPR 16-2-1 Ed. 1.1 2005
- CISPR 16-2-3 1<sup>st</sup> Ed. 2003
- IEC 61000-4-2 Ed. 2.0
- IEC 61000-4-3 Ed. 3.2
- IEC 61000-4-4 Ed. 2.0
- IEC 61000-4-5 2<sup>nd</sup> Ed.
- IEC 61000-4-6 3<sup>rd</sup> Ed.
- IEC 61000-4-8 2<sup>nd</sup> Ed.
- IEC 61000-4-11 2<sup>nd</sup> Ed.

# Table of Contents

---

<b>SECTION A: GENERAL INFORMATION .....</b>	<b>5</b>
<b>1.0 INTRODUCTION .....</b>	<b>5</b>
<b>1.1 Scope.....</b>	<b>5</b>
<b>1.2 Purpose.....</b>	<b>5</b>
<b>1.3 Results Summary.....</b>	<b>6</b>
<b>1.4 Performance Criteria .....</b>	<b>7</b>
<b>2.0 TEST FACILITIES &amp; ENVIRONMENT.....</b>	<b>8</b>
<b>2.1 Test Facilities .....</b>	<b>8</b>
<b>2.2 Laboratory Accreditations/Recognitions/Certifications.....</b>	<b>8</b>
<b>2.3 Test Environment.....</b>	<b>8</b>
<b>2.4 Test Equipment Calibration Statement.....</b>	<b>8</b>
<b>3.0 EQUIPMENT UNDER TEST (EUT) .....</b>	<b>8</b>
<b>3.1 Manufacturer .....</b>	<b>8</b>
<b>3.3 System Block Diagram and Support Equipment .....</b>	<b>9</b>
<b>3.4 Observations.....</b>	<b>10</b>
<b>SECTION B: EMISSIONS – TEST INFORMATION AND RESULTS .....</b>	<b>11</b>
<b>4.0 RADIATED AND CONDUCTED EMISSIONS .....</b>	<b>11</b>
<b>4.1 Radiated Emissions.....</b>	<b>11</b>
<b>4.2 Conducted Emissions.....</b>	<b>18</b>
<b>5.0 HARMONIC CURRENT EMISSIONS .....</b>	<b>25</b>
<b>6.0 VOLTAGE FLUCTUATIONS &amp; FLICKER.....</b>	<b>26</b>
<b>SECTION C: IMMUNITY – TEST INFORMATION AND RESULTS .....</b>	<b>27</b>
<b>7.0 ELECTROSTATIC DISCHARGE IMMUNITY .....</b>	<b>27</b>
<b>8.0 RADIO-FREQUENCY ELECTROMAGNETIC FIELDS .....</b>	<b>32</b>
<b>9.0 ELECTRICAL FAST TRANSIENT/BURSTS .....</b>	<b>35</b>
<b>10.0 SURGE IMMUNITY .....</b>	<b>38</b>
<b>11.0 RADIO-FREQUENCY COMMON-MODE IMMUNITY .....</b>	<b>39</b>
<b>12.0 POWER FREQUENCY MAGNETIC FIELDS IMMUNITY .....</b>	<b>43</b>
<b>13.0 VOLTAGE DIPS AND INTERRUPTIONS .....</b>	<b>44</b>
<b>SECTION D: MEASUREMENT UNCERTAINTY .....</b>	<b>45</b>
<b>SECTION E: CONCLUSION .....</b>	<b>45</b>

## SECTION A: GENERAL INFORMATION

### 1.0 Introduction

#### 1.1 Scope

This report documents conformance with the requirements set forth in EN 60945:2002 and details the results of testing performed on June 20, 2016 through June 24, 2016 on the model HELIX 7 CHIRP SI GPS G2 manufactured by Johnson Outdoors Marine Electronics, Inc..

#### 1.2 Purpose

Testing was performed to evaluate the EUT with regard to EMC regulatory requirements in accordance with the European Union's CE Marking arrangements.

## 1.3 Results Summary

Product Standard or Test Method Applied	Description	Result
<u>Product Standards</u>		
EN 60945:2002	Maritime navigation and radio communication equipment and systems General Requirements Methods of testing and required test results	Pass
EN 61000-3-2:2014	Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current <= 16 A per phase)	N/A
EN 61000-3-3:2013	Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current <= 16 A per phase and not subject to conditional connection	N/A
<u>Basic Immunity Standards per EN 60945:2002</u>		
IEC 61000-4-2 Ed. 2.0	Electromagnetic compatibility (EMC) - Part 4-2: Testing and measurement techniques - Electrostatic discharge immunity test	Pass
IEC 61000-4-3 Ed. 3.2	Electromagnetic compatibility (EMC) - Part 4-3: Testing and measurement techniques - Radiated, radio-frequency, electromagnetic field immunity test	Pass
IEC 61000-4-4 Ed. 2.0	Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test	Pass
IEC 61000-4-5 2 <sup>nd</sup> Ed.	Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test	N/A
IEC 61000-4-6 3 <sup>rd</sup> Ed.	Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields	Pass
IEC 61000-4-8 2 <sup>nd</sup> Ed.	Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test	N/A
IEC 61000-4-11 2 <sup>nd</sup> Ed.	Electromagnetic compatibility (EMC) - Part 4-11: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests	N/A

N/A = Test Not Applicable to this EUT

N/P = Not Performed. See Test Justification for Details

## 1.4 Performance Criteria

### 1.4.1 Emissions Performance Criteria

For model HELIX 7 CHIRP SI GPS G2 the limits which apply are EN 60945:2002 Class B. These limits are found in Table 1.4.1-1 below:

**Table 1.4.1-1 Emissions Limits EN 60945:2002 Class B**

	Portable	Protected	Exposed	Submerged
Conducted emissions (9.2)		10 kHz – 150 kHz 150 kHz – 350 kHz 350 kHz – 30 MHz	63 mV – 0,3 mV (96 dB $\mu$ V – 50 dB $\mu$ V) 1 mV – 0,3 mV (60 dB $\mu$ V – 50 dB $\mu$ V) 0,3 mV (50 dB $\mu$ V)	
Radiated emissions (9.3)	150 kHz – 300 kHz 300 kHz – 30 MHz 30 MHz – 2 GHz 156 MHz – 165 MHz	10 mV/m – 316 $\mu$ V/m (80 dB $\mu$ V/m – 52 dB $\mu$ V/m) 316 $\mu$ V/m – 50 $\mu$ V/m (52 dB $\mu$ V/m – 34 dB $\mu$ V/m) 500 $\mu$ V/m (54 dB $\mu$ V/m) except for 16 $\mu$ V/m (24 dB $\mu$ V/m) quasi-peak or 32 $\mu$ V/m (30 dB $\mu$ V/m) peak		

### 1.4.2 Immunity Performance Criteria

Each immunity test requires 1 of 3 performance criteria to be met. Below are descriptions of each.

**Performance Criterion A:** The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

**Performance Criterion B:** The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

**Performance Criterion C:** Temporary loss of function is allowed, provided the function is self recoverable or can be restored by the operation of the controls

## 2.0 Test Facilities & Environment

### 2.1 Test Facilities

All testing was performed at the following address:

Advanced Compliance Solutions, Inc.  
5015 B.U. Bowman Drive  
Buford GA 30518  
Phone: (770) 831-8048  
Fax: (770) 831-8598  
[www.acstestlab.com](http://www.acstestlab.com)

The laboratory is fully equipped to carry out the tests outlined in section 1.0

### 2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the ANSI-ASQ National Accreditation Board/ANAB accreditation program, and has been issued certificate number AT-2021 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

### 2.3 Test Environment

Unless otherwise specified by the generic or product standard, the EUT was evaluated within the climate conditions of the EUT as specified by the manufacturer.

Where the manufacturer does not specify climate parameters for the EUT, all test are performed within the climate parameters given below:

- Ambient temperature 15° to 35° C
- Relative Humidity 30% to 60%
- Atmospheric Pressure 860mbar to 1060mbar

### 2.4 Test Equipment Calibration Statement

Test equipment used for each test is specified in the relevant sections of this test report. Unless expressly given, all test equipment is calibrated on an annual basis, where applicable. All test equipment is operated within the climate specifications as defined by the manufacturer.

## 3.0 Equipment Under Test (EUT)

### 3.1 Manufacturer

Johnson Outdoors Marine Electronics, Inc.  
678 Humminbird Lane  
Eufaula, AL 36027  
Seth Bergman  
334-687-6613  
[sbergman@johnsonoutdoors.com](mailto:sbergman@johnsonoutdoors.com)

### 3.2 Modifications

Table 3.2-1 below describes any modification required to bring the EUT into compliance with the test standard. Photographs of the modifications, if any, are contained in appendix a.

**Table 3.2-1: EUT Modifications**

<input checked="" type="checkbox"/> Modifications <u>were not</u> required to bring the EUT into compliance with the requirements.
<input type="checkbox"/> Modifications <u>were</u> required to bring the EUT into compliance with the requirements.

### 3.3 System Block Diagram and Support Equipment

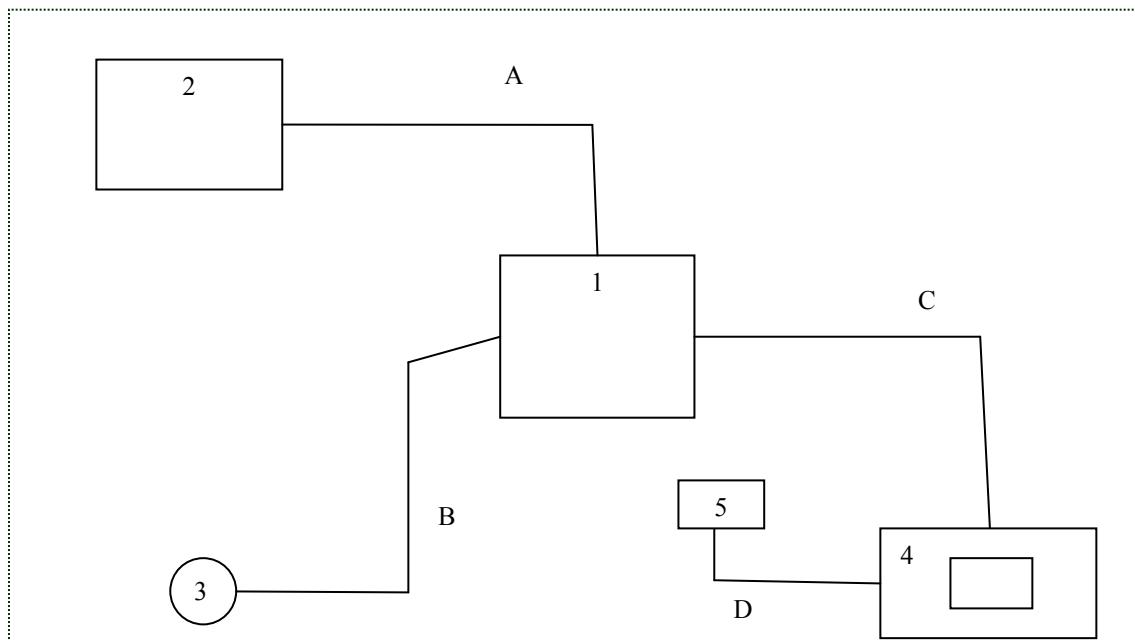


Figure 3.3-1: System Block Diagram

**Table 3.3-1: EUT and Support Equipment Description**

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	GPS Display	Humminbird	Helix 7 Gen. 2	N/A
2	12V Battery	AutoCraft	24DC-1	N/A
3	GPS Puck	Humminbird	N/A	12062742-0043
4	Transducer	Humminbird	N/A	N/A
5	Depth simulator	Humminbird	N/A	N/A

**Table 3.3-2: Cable Description**

Cable #	Cable Type	Length	Shield	Termination
A	Power Cable	100 cm	Not Shielded	1 - 2
B	GPS Cable	605 cm	Not Shielded	1 - 3
C	Transducer Cable	600 cm	Not Shielded	1 - 4
D	Coax Cable	35 cm	Not Shielded	4 - 5

### 3.4 Observations

Any general observations regarding any part of the evaluation are given in table 3.4-1.

**Table 3.4-1: Observations**

<u>Observation No.</u>	<u>Description</u>

## SECTION B: EMISSIONS – TEST INFORMATION AND RESULTS

### 4.0 Radiated and Conducted Emissions

#### 4.1 Radiated Emissions

##### 4.1.1 Test Site Description

###### 4.1.1.1 Open Area Test Site

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style reinforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 4.1.1.1-1 below:

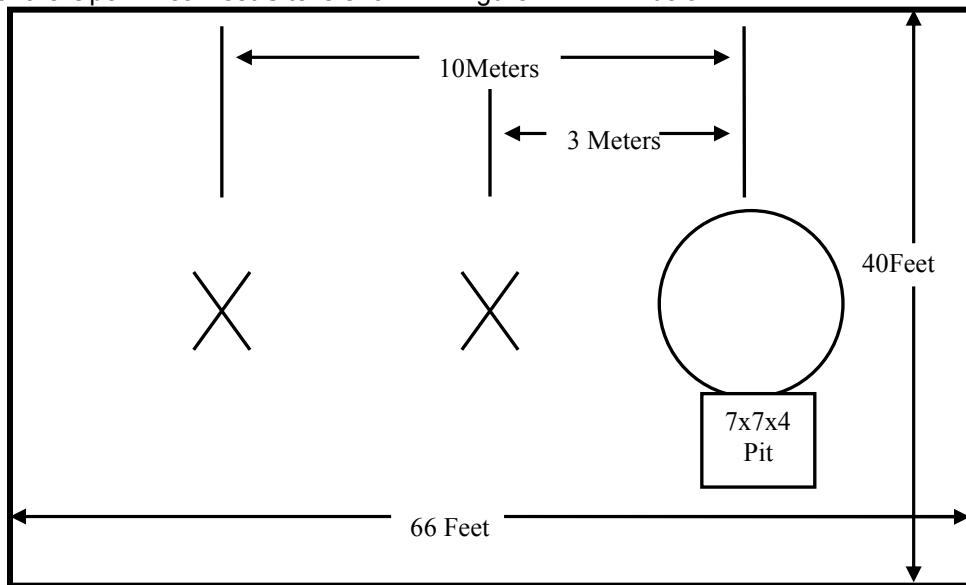


Figure 4.1.1.1-1: Open Area Test Site

#### 4.1.1.2 Semi-Anechoic Chamber

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 4" x 4" x 3/4" thick and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable. The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

To comply with the requirements of the test methods given on page 3, RF absorbing foam was placed inside the chamber in a configuration that provided the best results. First, an 8 ft. patch of 12" tall absorber was placed on the floor between the turntable and the receiving antenna. This absorber meets the absorption requirements specified in ANSI C63.4:2009. Next, three vertical structures (Fences) were created and covered with 8" pyramidal RF absorbing foam, two 4 ft. x 4 ft. and one 6 ft. x 4 ft. These fences were placed at locations to prevent high energy signals from reaching the back chamber wall and reflecting back to the receive antenna.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 4.1.1.2-1 below:

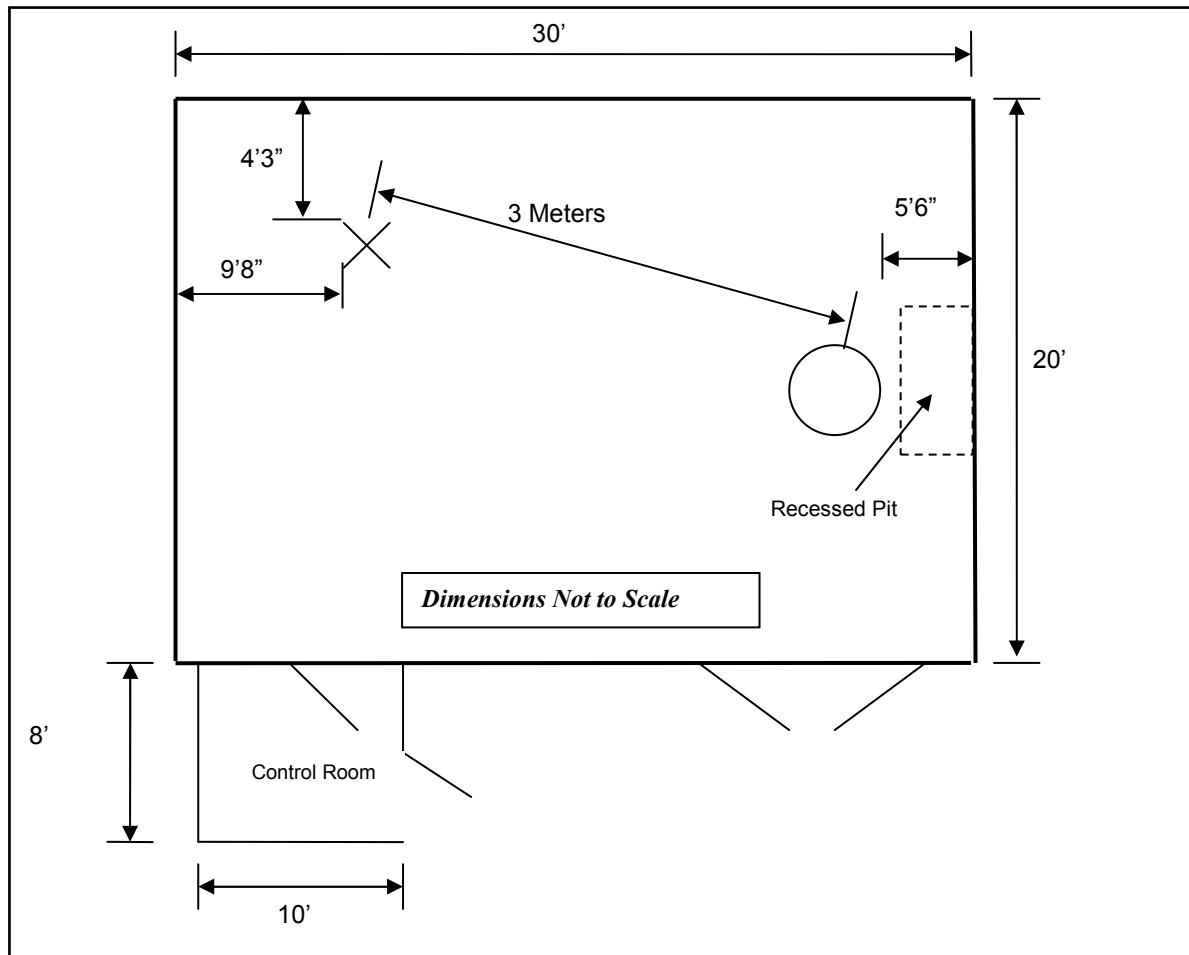


Figure 4.1.1.2-1: Semi-Anechoic Chamber Test Site

#### 4.1.1.3 Fully Anechoic Chamber

The 3m fully anechoic chamber is used for pre-screening the EUT for emissions only. Final screening is performed on the OATS or in case of Class B EUT's, in the 3m semi-anechoic chamber. The Fully Anechoic Chamber has been characterized for field uniformity in accordance with IEC 61000-4-3 and can be used for final radiated fields immunity testing.

The Fully-Anechoic Chamber Test Site consists of a 24'L x 16'W x 12'H shielded enclosure. The chamber is fully lined with RF absorbing foam. The foam ranges in type from 8-24" conventional pyramidal cones, 8-12" conventional wedges and 6" and 16" Hybrid Foam over ferrite tile. The Hybrid material is placed in the 6 specular regions of the chamber for better low-frequency performance. The specular regions are 1) directly behind the receiving antenna, 2) on the floor between the receiving antenna and the EUT table, 3) the wall directly behind the EUT, 4&5) the side walls between the receiving antenna and the EUT table and 6) the ceiling between the receiving antenna and the EUT. The specular regions are 6' x 4' in size.

The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the shield using 3/4" stainless steel braided cable.

The turntable is a remotely controlled EMCO Model 1060 and is 150cm in diameter and is located 1m from the absorber on the back wall of the chamber.

A diagram of the Fully Anechoic Chamber Test Site is shown in Figure 4.1.1.3-1 below:

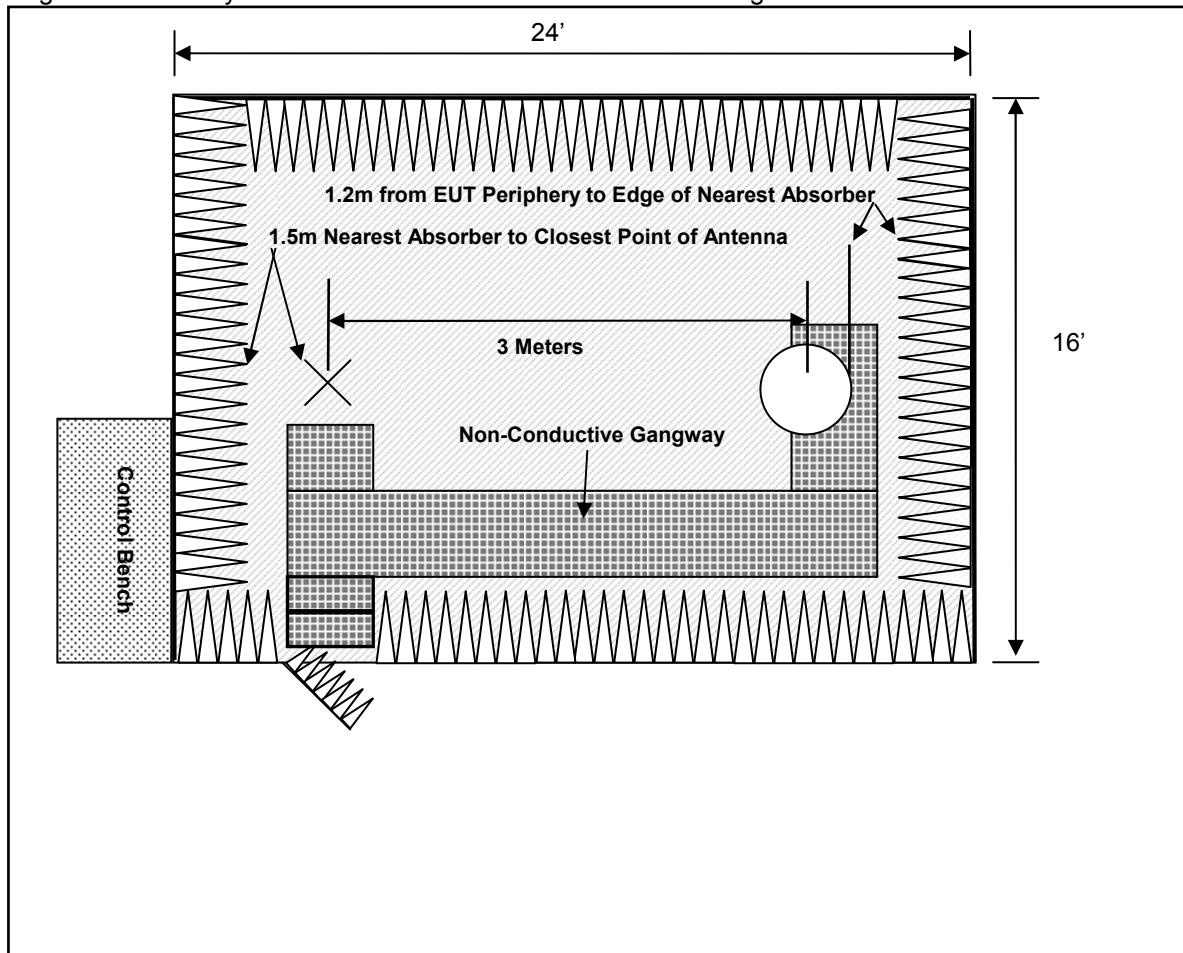


Figure 4.1.1.3-1: Fully Anechoic Chamber Test Site

#### 4.1.2 Test Equipment

Table 4.1.2-1 identifies all equipment used for radiated emissions respectively.

**Table 4.1.2-1 Test Equipment – Radiated Emissions**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
1	Rohde & Schwarz	ESMI - Display	Spectrum Analyzers	833771/007	7/14/2015	7/14/2016
2	Rohde & Schwarz	ESMI-Receiver	Spectrum Analyzers	839587/003	7/14/2015	7/14/2016
73	Agilent	8447D	Amplifiers	2727A05624	7/15/2015	7/15/2016
338	Hewlett Packard	8449B	Amplifiers	3008A01111	8/21/2015	8/21/2017
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/30/2015	4/30/2017
40	EMCO	3104	Antennas	3211	6/8/2016	6/8/2018
412	Electro Metrics	LPA-25	Antennas	1241	7/24/2014	7/24/2016
616	Florida RF Cables	IRE-200W-12.0-SM	Cables	N/A	9/3/2015	9/3/2016
422	Florida RF	MS-200AW-72.0-SN	Cables	805	10/30/2015	10/30/2016
167	ACS	Hammer EMI Cable S	Cable Set	167	10/20/2015	10/20/2016

**NCR = No Calibration Required**

#### 4.1.3 Test Methodology

##### 4.1.3.1 Pre-Scans

Radiated pre-scans are performed on all EUT's in either the 3m Semi-Anechoic or the 3m Fully-Anechoic Chamber. Final emission testing for Class A equipment is performed on the 3/10m Open Area Test Site (OATS) as described in section 4.1.1.1. Final emission testing on Class B equipment can be performed either in the 3m Semi-Anechoic chamber described in section 4.1.1.2 or on the OATS.

Pre-scans are a method by which the 10 highest emissions can be identified for final evaluation. This is achieved by taking automated emission snapshots of the EUT at various azimuths and antenna heights. The software is programmed to perform a peak sweep of the band using the maxhold function. This sweep is performed every 90° in both horizontal and vertical polarities and at antenna heights of 100cm and 300cm. Although not a fully maximized scan, the pre-scan gives a good indication of pass or fail.

##### 4.1.3.2 Final Scans

Radiated emissions measurements were made over the frequency range of 150kHz – 2GHz. Quasi-Peak measurements are taken with the Spectrum Analyzer's resolution bandwidth was set to 120KHz and video bandwidth set to 300 kHz for measurements below 1000MHz. Average measurements above 1000MHz are taken using measurement instruments average detector. The calculation for the radiated emissions field strength is as follows:

$$\text{Corrected Reading} = \text{Analyzer Reading} + \text{Cable Loss} + \text{Antenna Factor}$$

$$\text{Margin(dB)} = \text{Applicable Limit} - \text{Corrected Reading}$$

##### 4.1.3.3 Test Criteria

The EUT must meet the Class B Limits as given in section 1.4.1.

##### 4.1.3.4 Test Justification

**No justification - The EUT was tested per the appropriate test methods and test plan.**  
 **The test method, standard, and/or test plan was deviated from for the following reason:**

#### 4.1.4 Test Setup Photographs



Figure 4.1.4-1: Radiated Emissions - Front View



Figure 4.1.4-2: Radiated Emissions - Rear View

**4.1.5 Test Data**

Final tabulated radiated emissions data are reported in the Test Data Table below:

**Test Parameters:**

Test Date:	June 20, 2016	Temperature (°C)	26
Technician:	Art Sumner	Humidity (%)	34
Equipment Class:	Class B	Barometric Pressure (mBar)	1023
Tested Modes:	GPS active; Sonar mode measuring 6ft		
AC Input Power:	N/A		
DC Input Power:	12Vdc		

**Test Data Table:**

Measurement Distance:												
Frequency (MHz)	Measured Level (dBuV)		Antenna Polarity (H/V)	Antenna Height (cm)	Turntable Position (°)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	Pk	Qpk/Av					Pk	Qpk/Av	Pk	Qpk/Av	Pk	Qpk/Av
39.82	48.49	v	100	0	-13.99	-----	34.50	-----	54.0	-----	19.5	
40.116	48.92	V	100	105	-14.00	-----	34.92	-----	54.0	-----	19.1	
40.76	48.92	v	100	5	-14.02	-----	34.90	-----	54.0	-----	19.1	
41.14	50.52	V	100	5	-14.02	-----	36.50	-----	54.0	-----	17.5	
43.41	50.70	v	100	5	-14.07	-----	36.63	-----	54.0	-----	17.4	
90.86	38.08	V	100	355	-13.75	-----	24.33	-----	54.0	-----	29.7	

Qpk = Quasi-Peak Measurement or Limit (&lt; 1GHz)

AV = Average Measurement or Limit (&gt;1GHz)

**Notes:**There were no significant emissions found above 1GHz.There were no significant emissions found below 30MHz.

## 4.2 Conducted Emissions

### 4.2.1 Conducted Emissions Test Site

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

A diagram of the room is shown below in figure 4.2.1-1:

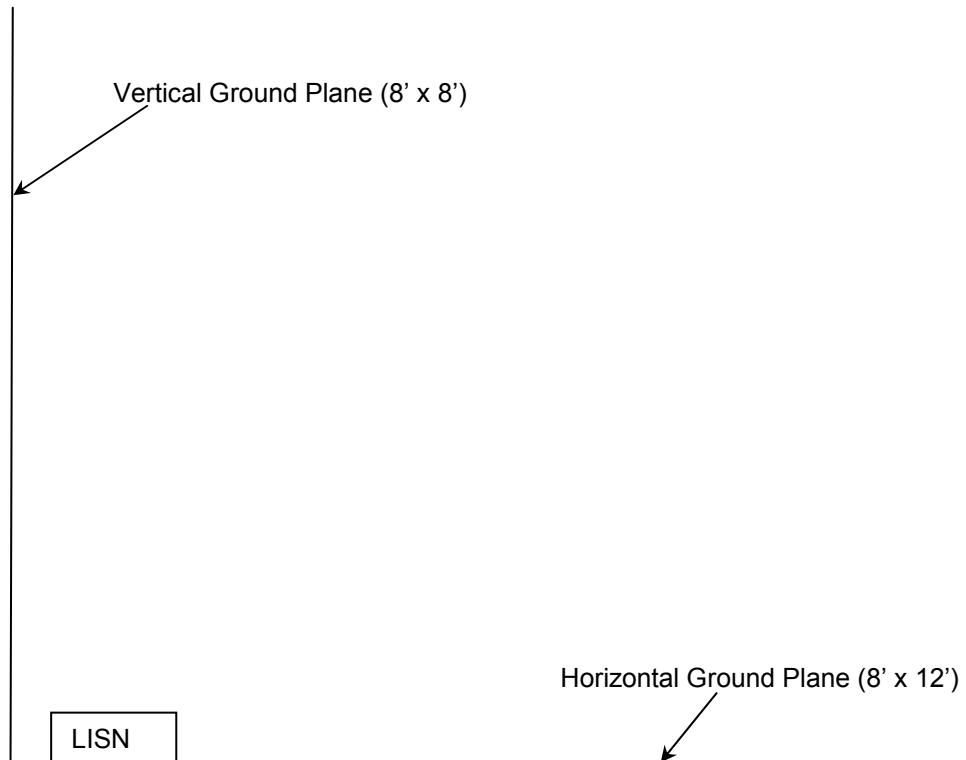


Figure 4.2.1-1: AC Mains Conducted EMI Site

## 4.2.2 Test Equipment

**Table 4.2.2-1 Test Equipment – Conducted Emissions**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
re112	Rohde & Schwarz	ESIB26	Receiver	836119/012	7/16/2015	7/16/2016
3010	Rohde & Schwarz	ENV216	LISN	3010	7/10/2015	7/10/2016
324	ACS	Belden	Cables	8214	5/2/2016	5/2/2017

NCR=No Calibration Required

## 4.2.3 Test Methodology

Conducted emissions were performed from 9kHz to 150kHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

$$\begin{aligned} \text{Corrected Reading} &= \text{Analyzer Reading} + \text{LISN Loss} + \text{Cable Loss} \\ \text{Margin} &= \text{Applicable Limit} - \text{Corrected Reading} \end{aligned}$$

### 4.2.3.1 Test Criteria

The EUT must meet the Class B Limits as given in section 1.4.1.

### 4.2.3.2 Test Justification

**No justification - The EUT was tested per the appropriate test methods and test plan.**  
 **The test method, standard, and/or test plan was deviated from for the following reason:**

#### 4.2.4 Test Setup Photographs



Figure 4.2.4-1: Conducted Emissions Test Setup – Front View

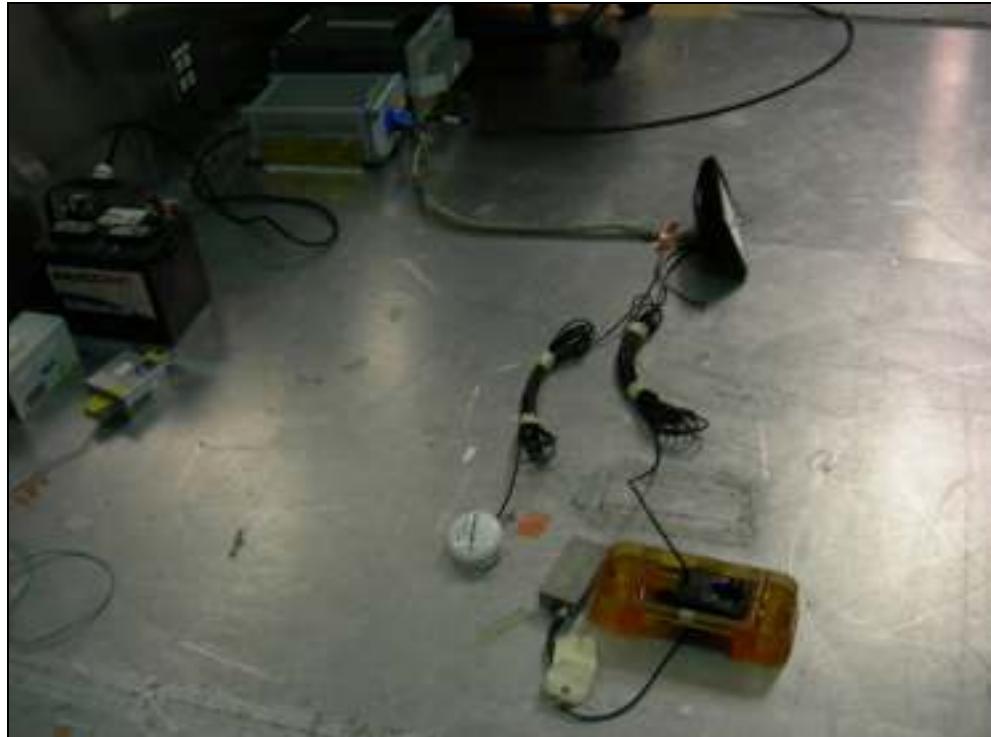


Figure 4.2.4-2: Conducted Emissions Test Setup – Side View

**4.2.5 Test Data**

Tabulated data is given in the Test Data Tables below.

**Test Parameters:**

Test Date:	June 21, 2016	Temperature (°C)	24
Technician:	Art Sumner	Humidity (%)	39
Equipment Class:	Class B	Barometric Pressure (mBar)	1020
Tested Modes:	Powered ON; reading 6ft depth; GPS active		
AC Input Power:	N/A		
DC Input Power:	12Vdc battery		

**Tested Leads:**

AC Mains – Number of Lines:  
 DC Mains – Number of Lines: 2  
 Telecom Port – Quantity:

**Test Data Tables:**

Check All That Apply to This Data						
Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.029968	---	43.58	---	---	L1	9.4
0.029968	46.74	---	73.70	26.96	L1	9.4
0.033165	---	32.65	---	---	L1	9.5
0.033165	35.77	---	71.92	36.15	L1	9.5
0.035990	---	27.08	---	---	L1	9.6
0.035990	37.63	---	70.52	32.89	L1	9.6
0.059946	---	36.26	---	---	L1	9.6
0.059946	39.00	---	62.36	23.36	L1	9.6
0.089890	---	28.73	---	---	L1	9.7
0.089890	31.10	---	56.56	25.46	L1	9.7
0.119810	---	14.98	---	---	L1	9.7
0.119810	18.22	---	52.78	34.56	L1	9.7

**Notes:**

<b>Check All That Apply to This Data</b>	
<input checked="" type="checkbox"/> Line 1	<input type="checkbox"/> Line 2
<input type="checkbox"/> Line 3	<input type="checkbox"/> Line 4
<input type="checkbox"/> To Ground	<input checked="" type="checkbox"/> Floating
<input type="checkbox"/> Telecom Port	_____
<input checked="" type="checkbox"/> dB $\mu$ V	<input type="checkbox"/> dB $\mu$ A
Power Supply Description: <u>12Vdc</u>	

Frequency (MHz)	Corrected Reading		Limit (dB $\mu$ V)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dB $\mu$ V)	Average (dB $\mu$ V)				
3.260421	---	-2.24	---	---	L1	9.8
3.260421	27.86	---	50.00	22.14	L1	9.8
3.710521	---	-2.79	---	---	L1	9.8
3.710521	25.76	---	50.00	24.24	L1	9.8
4.571242	---	-1.96	---	---	L1	9.9
4.571242	27.36	---	50.00	22.64	L1	9.9
5.057014	---	0.15	---	---	L1	9.9
5.057014	30.22	---	50.00	19.78	L1	9.9
5.935371	---	-0.14	---	---	L1	10.0
5.935371	30.91	---	50.00	19.09	L1	10.0
16.121343	---	9.81	---	---	L1	10.1
16.121343	27.57	---	50.00	22.43	L1	10.1

**Notes:**

<u>Check All That Apply to This Data</u>						
<input type="checkbox"/> Line 1 <input checked="" type="checkbox"/> Line 2 <input type="checkbox"/> Line 3 <input type="checkbox"/> Line 4 <input type="checkbox"/> To Ground <input checked="" type="checkbox"/> Floating <input type="checkbox"/> Telecom Port _____ <input checked="" type="checkbox"/> dB $\mu$ V <input type="checkbox"/> dB $\mu$ A						
Power Supply Description: <u>12Vdc battery</u>						
Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.029966	---	43.37	---	---	N	9.4
0.029966	46.40	---	73.70	27.30	N	9.4
0.032605	---	30.44	---	---	N	9.5
0.032605	34.36	---	72.22	37.86	N	9.5
0.035928	---	25.49	---	---	N	9.5
0.035928	35.40	---	70.55	35.15	N	9.5
0.059930	---	36.25	---	---	N	9.6
0.059930	38.86	---	62.37	23.51	N	9.6
0.089854	---	28.80	---	---	N	9.7
0.089854	31.10	---	56.57	25.47	N	9.7
0.142130	---	12.57	---	---	N	9.7
0.142130	15.58	---	50.65	35.07	N	9.7

**Notes:**

<b>Check All That Apply to This Data</b>			
<input type="checkbox"/> Line 1	<input checked="" type="checkbox"/> Line 2	<input type="checkbox"/> Line 3	<input type="checkbox"/> Line 4
<input type="checkbox"/> To Ground	<input checked="" type="checkbox"/> Floating		
<input type="checkbox"/> Telecom Port			
<input checked="" type="checkbox"/> dB $\mu$ V		<input type="checkbox"/> dB $\mu$ A	
Power Supply Description: <u>12Vdc</u>			

Frequency (MHz)	Corrected Reading		Limit (dB $\mu$ V)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dB $\mu$ V)	Average (dB $\mu$ V)				
0.964830	---	33.09	---	---	N	9.7
0.964830	40.34	---	50.00	9.66	N	9.7
3.862625	---	0.23	---	---	N	9.8
3.862625	28.66	---	50.00	21.34	N	9.8
4.886073	---	-2.99	---	---	N	9.9
4.886073	19.62	---	50.00	30.38	N	9.9
5.959219	---	-1.10	---	---	N	10.0
5.959219	25.72	---	50.00	24.28	N	10.0
6.076472	---	3.58	---	---	N	10.0
6.076472	32.42	---	50.00	17.58	N	10.0
6.368637	---	1.00	---	---	N	10.0
6.368637	31.41	---	50.00	18.59	N	10.0

**Notes:**

## 5.0 Harmonic Current Emissions

### 5.1 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.  
 The test method, standard, and/or test plan was deviated from for the following reason:

**This test is not applicable, because the EUT is not powered through an AC Mains power supply.**

## 6.0 Voltage Fluctuations & Flicker

### 6.1 Test Justification

- No justification - The EUT was tested per the appropriate test methods and test plan.
- The test method, standard, and/or test plan was deviated from for the following reason:

This test is not applicable, because the EUT is not powered through an AC Mains power supply.

## SECTION C: IMMUNITY – TEST INFORMATION AND RESULTS

### 7.0 Electrostatic Discharge Immunity

#### 7.1 Test Site Description

The EUT was configured and connected to satisfy its functional requirements.

For a table top configuration, the EUT was placed on an insulating support of 0.5mm in the center of the Horizontal Coupling Plane (HCP). The HCP laid flat on a non-conductive table measuring 1.6 meters x 0.8 meters x 0.8 meters. The non-conductive table was placed on a 16 feet x 8 feet Ground Reference Plane (GRP). The Vertical Coupling Plane was placed 10cm from the EUT and insulated from the HCP.

For a floor standing configuration the EUT was placed on a 10cm insulated support. The non-conductive spacer was placed on a 16 feet x 8 feet Ground Reference Plane (GRP). The Vertical Coupling Plane was placed 10cm from the EUT.

Both the HCP and the VCP were connected to the GRP via cables with 470kΩ resistors located at each end. The ground lead of the ESD generator was also connected to the GRP.

#### 7.2 Test Equipment

**Table 7.2-1: Test Equipment List**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
582	Kikusui	KES4021A	ESD Gun	SA003046	4/28/2016	4/28/2017

NCR = No Calibration Required

#### 7.3 Test Methodology

IEC 61000-4-2 - Electromagnetic compatibility (EMC) - Part 4. Testing and measurement techniques - Section 4.2 Electrostatic discharge immunity test - Basic EMC Publication, was the guiding document for this test. The purpose of this test is to verify the immunity of single devices or systems against electrostatic discharges (ESD) generated by an operator or object touching the equipment, or by objects or persons coming into contact in the vicinity of the equipment.

Only areas of the EUT that are accessible to the user are considered for the evaluation.

##### Direct Contact Discharge

Devices with accessible conductive surfaces are subject to direct contact discharges. Each test point identified was subjected to 10 discharges of both positive and negative impulses.

##### Indirect Contact Discharge

The EUT was subjected to indirect contact discharges to a horizontal coupling plane (HCP). At least 10 single discharges in both polarities were applied to the EUT via the HCP on all sides and at a separation distance of 10cm. In addition the EUT was subjected to indirect discharges to a vertical coupling plane (VCP). At least 10 single discharges in both polarities were applied to the EUT via the VCP on all sides and at a separation distance of 10cm.

##### Air Discharge

Insulated surfaces of the EUT that are accessible were subjected to air discharges. Each test point is subjected to 10 discharges of each polarity.

#### 7.3.1 Test Criteria

EN 60945:2002 requires performance criterion B to be met as described in section 1.4.2.

### 7.3.2 Test Justification

- No justification - The EUT was tested per the appropriate test methods and test plan.
- The test method, standard, and/or test plan was deviated from for the following reason:


### 7.4 Test Setup Photograph



Figure 7.4-1: Test Setup Photograph

## 7.5 ESD Data Sheet

### Test Point Photograph:

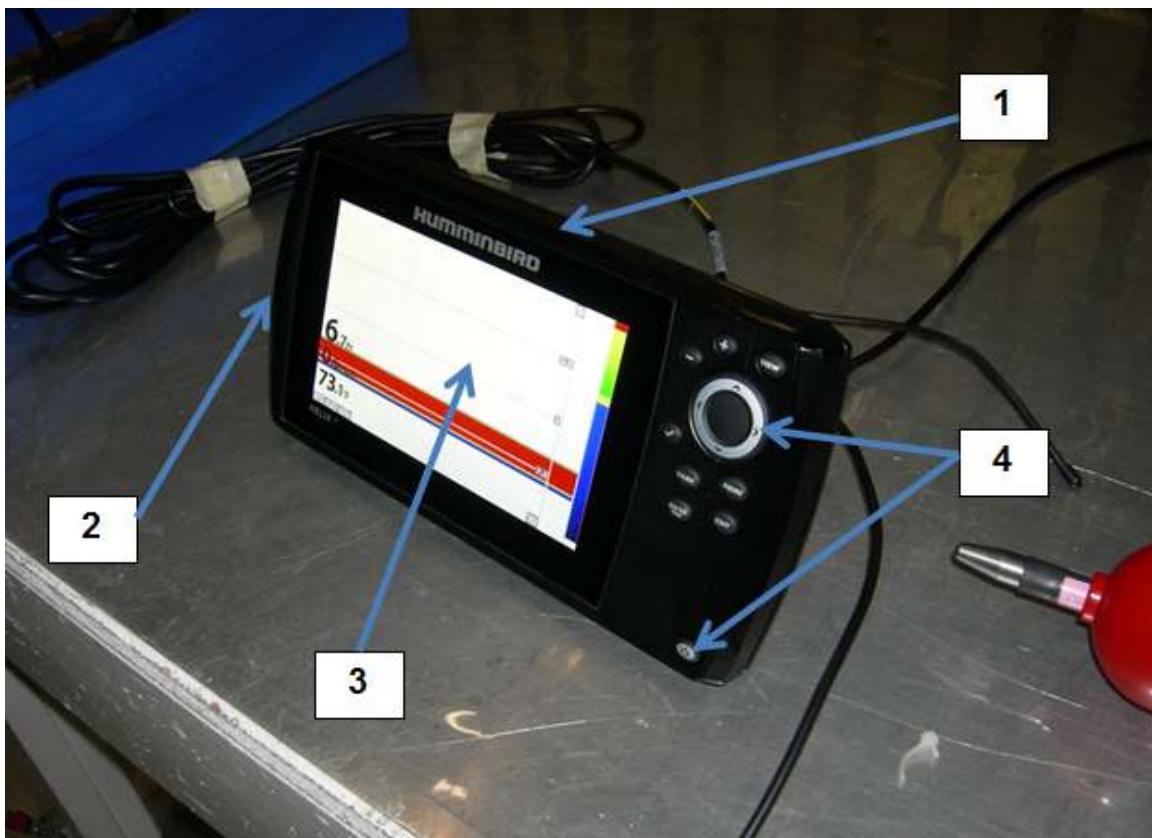

**Test Point Selection:**

TEST POINT#	DESCRIPTION	TYPE (C/A)
1	Seams on casing	Air
2	Seams on casing	Air
3	Screen	Air
4	Control buttons	Air
5	Power cable plug	Air
6	GPS cable plug	Air
7	Transducer cable plug	Air

## 7.6 Test Data

### Test Parameters:

Test Date:	6/21/2016	Temperature (°C)	24
Technician:	Art Sumner	Humidity (%)	34
Equipment Class:	N/A	Barometric Pressure (mBar)	1020
<input checked="" type="checkbox"/> Pre-test Verification Complete			
Tested Modes:	Powered ON; GPS active, measuring depth		
AC Input Power:	N/A	VCP Resistor Value Check:	944K
DC Input Power:	Error! Reference source not found.	HCP Resistor Value Check:	954K

### Indirect Contact Discharge:

Check All That Apply to This Data			
Plane:	Polarity:	Tested Levels:	
<input type="checkbox"/> Vertical Coupling Plane	<input type="checkbox"/> Positive	<input checked="" type="checkbox"/> 2kV	<input type="checkbox"/> 8kV
<input type="checkbox"/> Horizontal Coupling Plane	<input type="checkbox"/> Negative	<input checked="" type="checkbox"/> 4kV	<input type="checkbox"/> 15kV
<input checked="" type="checkbox"/> Both	<input checked="" type="checkbox"/> Both	<input checked="" type="checkbox"/> 6kV	<input type="checkbox"/> Enter Other Level Here

Side	Result	Observation (Describe any detectable event)
Front	Pass	
Rear	Pass	
Left	Pass	
Right	Pass	
Bottom	Pass	

### Notes:

### Air and Direct Contact Discharge:

Check All That Apply to This Data			
Polarity:	Tested Levels:		
<input type="checkbox"/> Positive	<input checked="" type="checkbox"/> 2kV	<input checked="" type="checkbox"/> 8kV	
<input type="checkbox"/> Negative	<input checked="" type="checkbox"/> 4kV	<input type="checkbox"/> 15kV	
<input checked="" type="checkbox"/> Both	<input checked="" type="checkbox"/> 6kV	<input type="checkbox"/> Enter Other Level Here	

Test Point	Discharge Type	Result	Observation (Describe any detectable event)
1	Air	Pass	
2	Air	Pass	
3	Air	Pass	
4	Air	Pass	
5	Air	Pass	
6	Air	Pass	

### Notes:

## 8.0 Radio-Frequency Electromagnetic Fields

### 8.1 Test Site Description

The radiated fields test was performed in the semi or fully-anechoic chamber described in section 4.1.1.2 or 4.1.1.3 respectively.

### 8.2 Test Equipment

**Table 8.2-1: Test Equipment List**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
370	IFI	CMX5002	Amplifier	L364-0407	NCR	NCR
Re89	Amplifier Research	25S1G4A	Amplifiers	324609	NCR	NCR
565	United Microwave Products, Inc.	OO-190-15.00.0	Cables	565	NCR	NCR
684	Rohde & Schwarz	SML03	Signal Generators	103503	11/4/2015	11/4/2016
642	Fairview Microwave	FMC0101951-200CM	Cables	N/A	NCR	NCR
566	United Microwave Products, Inc.	OO-190-00-120.0	Cables	566	NCR	NCR
329	A.H.Systems	SAS-571	Antennas	721	7/22/2015	7/22/2017
354	ETS Lindgren	3142C	Antennas	78838	NCR	NCR
1112	Wandel & Goltermann	BN2244/21	Probes	H0006	12/3/2015	12/3/2016
1201	Wandel & Goltermann	2244/99.22	Probes	W-0004	12/3/2015	12/3/2016

NCR = No Calibration Required

### 8.3 Test Methodology

IEC 61000-4-3 Ed. 3.- Electromagnetic compatibility (EMC) - Part 4. Testing and measurement techniques - Section 3: Radiated, radio-frequency, electromagnetic field immunity test, was the guiding document for this test. The purpose of this test is to verify the immunity of single devices or systems when subjected to radio-frequency electromagnetic field.

The EUT was configured and connected to satisfy its functional requirements. One representative sample was placed on the table and rotated 90° to expose all side of the EUT to the radiofrequency electromagnetic field. The table is non-conductive measuring 1.5 meters x 1.0 meters x 0.8 meters. The non-conductive table was placed 3 meters from the radiating antenna.

The frequency ranges to be considered are swept with the signal 80% amplitude modulated with a 1kHz AM sine wave, pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range is swept incrementally, the step size shall not exceed 1% of fundamental with linear interpolation between calibrated points.

The test shall normally be performed with the generating antenna facing each of the four sides of the EUT, however if the equipment can be used in different orientations, the test shall be performed on all sides, 6 total.

The polarization of the field generated by each antenna necessitates testing each side twice, once with the antenna positioned vertically and again with the antenna positioned horizontally.

#### 8.3.1 Test Criteria

EN 60945:2002 requires criterion A to be met as described in section 1.4.2.

#### 8.3.2 Test Justification

- No justification - The EUT was tested per the appropriate test methods and test plan.**
- The test method, standard, and/or test plan was deviated from for the following reason:**

#### 8.4 Test Setup Photographs



Figure 8.4-1: Test Setup Photograph



Figure 8.4-2: Test Setup Photograph

## 8.5 Test Results

### Test Parameters:

Test Date:	June 23, 2016	Temperature (°C)	24.6C
Technician:	Don Brenner / Art Sumner	Humidity (%)	47.7%
Equipment Class:	N/A	Barometric Pressure (mBar)	1011.0mb
Tested Modes:	Powered monitoring GPS satellites, GPS position, time, Temperature, depth		
AC Input Power:	N/A		
DC Input Power:	12VDC		

### Test Data:

<u>Check All That Apply to This Data</u>			
Polarity	Field Strength:	Freq. Band:	Dwell Time
<input type="checkbox"/> Horizontal	<input type="checkbox"/> 3V/m	<input checked="" type="checkbox"/> 80-2000MHz	<input type="checkbox"/> 1 Second
<input type="checkbox"/> Vertical	<input checked="" type="checkbox"/> 10V/m	<input type="checkbox"/> 1.4-2.7GHz	<input checked="" type="checkbox"/> 2.86 Seconds
<input checked="" type="checkbox"/> Both	<input type="checkbox"/> 8V/m	<input type="checkbox"/> Enter Other Band Here	<input type="checkbox"/> Enter Other
	<input type="checkbox"/> Enter Other Level Here		
Azimuth	Result	Observation (Describe any detectable event)	
0	Pass		
90	Pass		
180	Pass		
270	Pass		

### Notes:

Test completed using 400Hz modulation.

<u>Check All That Apply to This Data</u>			
Polarity	Field Strength:	Freq. Band:	Dwell Time
<input type="checkbox"/> Horizontal	<input type="checkbox"/> 3V/m	<input checked="" type="checkbox"/> 1000-2000MHz	<input type="checkbox"/> 1 Second
<input type="checkbox"/> Vertical	<input checked="" type="checkbox"/> 10V/m	<input type="checkbox"/> 1.4-2.7GHz	<input checked="" type="checkbox"/> 9 Seconds
<input checked="" type="checkbox"/> Both	<input type="checkbox"/> 8V/m	<input type="checkbox"/> Enter Other Band Here	<input type="checkbox"/> Enter Other
	<input type="checkbox"/> Enter Other Level Here		
Azimuth	Result	Observation (Describe any detectable event)	
0	Pass		
90	Pass		
180	Pass		
270	Pass		

### Notes:

Test completed using 400Hz modulation.

## 9.0 Electrical Fast Transient/Bursts

### 9.1 Test Site Description

The EUT was configured and connected to satisfy its functional requirements. The EUT was placed in the center of a non-conductive support measuring 125cm x 96cm x 10 cm. The non-conductive support is placed on a 8 feet x 8 feet Ground Reference Plane (GRP). A minimum distance of 50 cm between the EUT and all other conductive structures was maintained. A minimum distance of 50 cm between the coupling clamp and all other conductive structures, except the GRP, was maintained. A 10 cm insulated support was placed between the capacitive coupling clamp and the GRP. The GRP was bonded to the EFT/B generator.

The input power port of the EUT was tested using the coupling/decoupling network. The +/-1kV bursts were applied to all lines individually as well as simultaneously.

The bursts were applied to the signal/control line ports, if present, using the capacitive coupling clamp.

### 9.2 Test Equipment

**Table 9.2-1: Test Equipment List**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
62	Haefely Trench	EFT Clamp	Immunity Equipment	None	7/17/2015	7/17/2016
474	Keytek	EMC PRO	General Lab Equipment	9808246	10/7/2015	10/7/2016
336	Tektronix	TDS 1012B	Scopes	C010189	7/15/2015	7/15/2016
503	Key Tek	TC-50	Cables	n/a	12/30/2015	12/30/2016
611	Teseq	INA 265B	Attenuators	73054	8/12/2015	8/12/2016

NCR = No Calibration Required

### 9.3 Test Methodology

IEC 61000-4-4 - Electromagnetic compatibility (EMC) - Part 4. Testing and measurement techniques - Section 4: Electrical fast transient/burst immunity test - Basic EMC Publication., was the guiding document for this test. The purpose of this test is to verify the immunity of single devices or systems when subjected to types of transient disturbances such as those originating from switching transients such as interruption of inductive loads or relay contact bounce.

#### 9.3.1 Test Criteria

EN 60945:2002 requires criterion B to be met as described in section 1.4.2.

#### 9.3.2 Test Justification

**No justification - The EUT was tested per the appropriate test methods and test plan.**  
 **The test method, standard, and/or test plan was deviated from for the following reason:**

#### 9.4 Test Setup Photographs

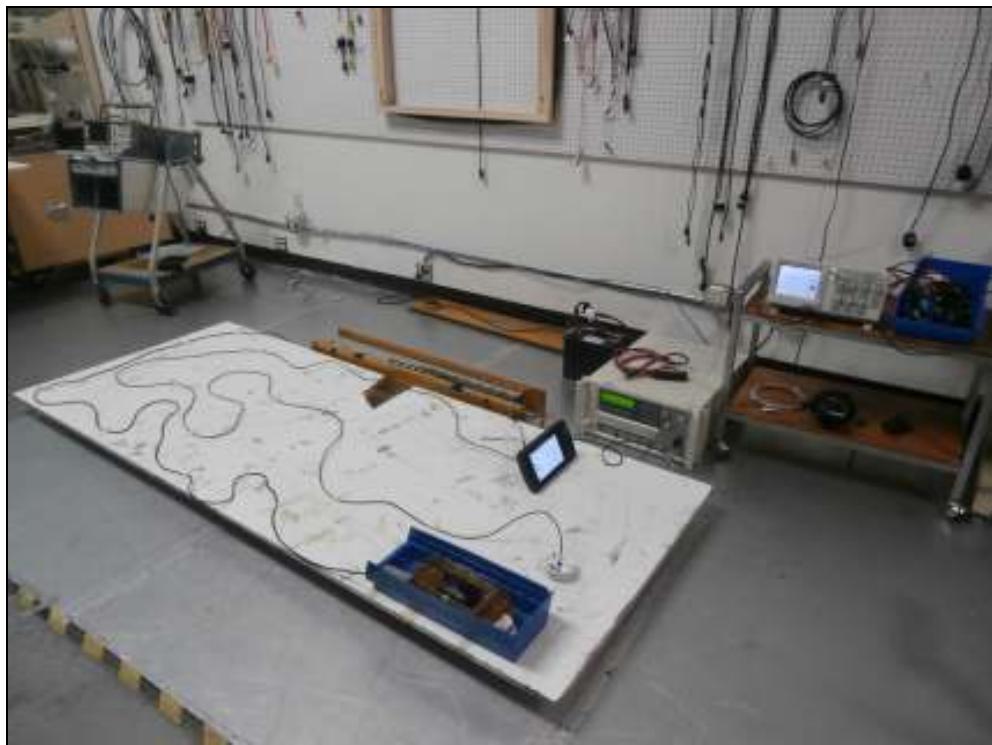


Figure 9.4-1: Test Setup Photograph

## 9.5 Test Results

### Test Parameters:

Test Date:	6/21/2016	Temperature (°C)	23.5
Technician:	Jaime Smith	Humidity (%)	39.9
Equipment Class:	NA	Barometric Pressure (mBar)	1017.1
Tested Modes:	Powered On , GPS, Depth Level		
AC Input Power:	N/A	<input checked="" type="checkbox"/> Pre-test Verification Complete	
DC Input Power:	12 VDC		

### Mains Test Data:

Check All That Apply to This Data			
Polarity:	Tested Levels:	Interface Type:	
<input type="checkbox"/> Positive	<input checked="" type="checkbox"/> .5kV	<input checked="" type="checkbox"/> Input	
<input type="checkbox"/> Negative	<input checked="" type="checkbox"/> 1kV	<input type="checkbox"/> Output	
<input checked="" type="checkbox"/> Both	<input type="checkbox"/> 2kV	<input type="checkbox"/> Both	
Coupling Mode	Result	Observation (Describe any detectable event)	
L1	Pass		
L2	Pass		
L1-L2	Pass		

### Notes:

### Signal Line Test Data:

Check All That Apply to This Data			
Polarity:	Tested Levels:		
<input type="checkbox"/> Positive	<input checked="" type="checkbox"/> .25kV		
<input type="checkbox"/> Negative	<input checked="" type="checkbox"/> .5kV		
<input checked="" type="checkbox"/> Both	<input checked="" type="checkbox"/> 1kV		
	<input type="checkbox"/> 2kV		
	<input type="checkbox"/> Enter Other Level Here		
Signal Line	Result	Observation (Describe any detectable event)	
GPS	Pass		
Depth Transducer	Pass		

### Notes:

## 10.0 Surge Immunity

### 10.1 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.  
 The test method, standard, and/or test plan was deviated from for the following reason:

**This test is not applicable, because the EUT is not powered through an AC Mains power supply.**

## 11.0 Radio-Frequency Common-Mode Immunity

### 11.1 Test Site Description

The EUT was configured and connected to satisfy its functional requirements. The EUT was placed on an insulating support of 0.1m height above a ground reference plane. All relevant cables were provided with the appropriate coupling and decoupling devices at a distance between 0.1m and 0.3m from the projected geometry of the EUT on the Ground Reference Plane (GRP).

### 11.2 Test Equipment

**Table 11.2-1: Test Equipment List**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
93	Chase	8101	Clamp	65	5/6/2016	5/6/2017
364	Amplifier Research	DC2600A	Coupler	322466	NCR	NCR
370	IFI	CMX5002	Amplifier	L364-0407	NCR	NCR
425	ACS	EMC Cable Set	Cable Set	425	NCR	NCR
427	Electro-Metrics	PCL-258-98	Probe	n/a	NCR	NCR
457	Com Power	CDN-M2-25	Coupler	511023	7/15/2015	7/15/2016
471	Bird Technologies Group	150-A-FFN-06	Attenuators	914	NCR	NCR
494	Omega	iBTHX-W	mate Monitoring Equipment	9460211	8/12/2014	8/12/2016
624	Advantest	R3261C	Spectrum Analyzers	31720426	NCR	NCR
642	Fairview Microwave	MC0101951-200C	Cables	N/A	NCR	NCR
684	R&S	SML03	SIGGEN	3425	11/4/2015	11/4/2016

NCR = No Calibration Required

### 11.3 Test Methodology

IEC 61000-4-6 3<sup>rd</sup> Ed. - Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 6: Immunity to conducted disturbances, induced by radio- frequency fields, was the guiding document for this test. The purpose of this test is to verify the immunity of single devices or systems when subjected to radio-frequency electromagnetic field.

The EUT was caused to operate as intended and monitored for changes in performance. The frequency range is swept from 150 kHz to 80MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1kHz AM sine wave, pausing to adjust the RF signal level or to switch coupling devices as necessary. The rate of sweep shall not exceed  $1.5 \times 10^{-3}$  decades. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

#### 11.3.1 Test Criteria

EN 60945:2002 requires criterion A to be met as described in section 1.4.2.

#### 11.3.2 Test Justification

- No justification - The EUT was tested per the appropriate test methods and test plan.
- The test method, standard, and/or test plan was deviated from for the following reason:

#### 11.4 Test Setup Photographs

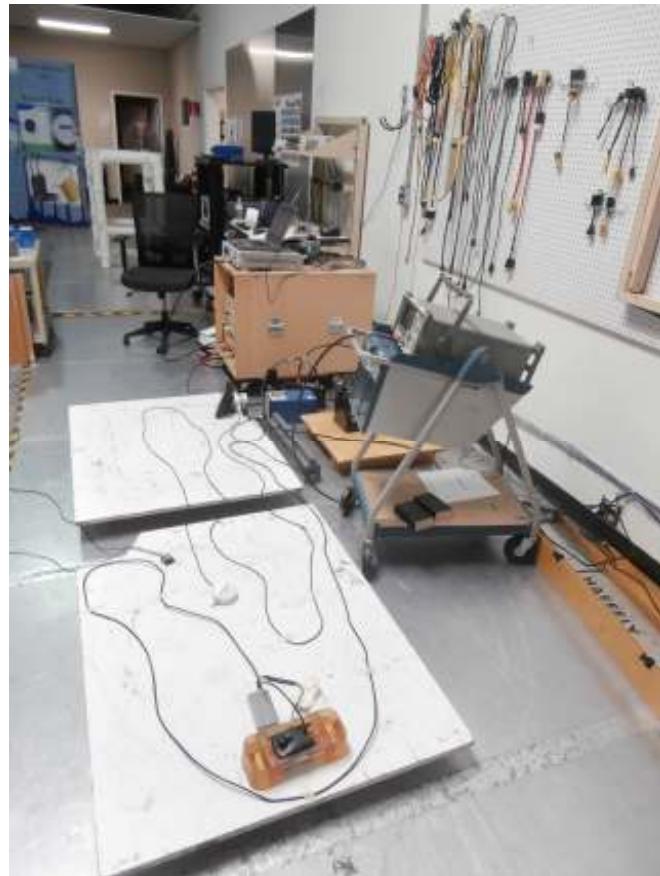


Figure 11.4-1: Test Setup Photograph

**11.5 Test Results****Test Parameters:**

Test Date:	6/22/16	Temperature (°C)	30.0C
Technician:	Reed Martin	Humidity (%)	36.10%
Equipment Class:	N/A	Barometric Pressure (mBar)	1018.2mb
Tested Modes:	GPS Functionality, Transducer Cable, Overall Functionality		
AC Input Power:	N/A	<input checked="" type="checkbox"/> Pre-Test Verification	
DC Input Power:	12V dc		

**Mains Test Data:**Check All That Apply to This Data

Test Level:      Freq. Band:  
 3Vrms       .150-80MHz  
 10Vrms       Enter Other Band Here  
 15Vrms  
 Enter Other Level Here

Coupling Mode	Result	Observation (Describe any detectable event)
CDN	Pass	

**Notes:****Tested using 400hz and 1 khz modulation****Spot frequencies of 2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8 & 25MHz; tested at 10Vrms @ 400Hz modulation.****Signal Line Test Data:**Check All That Apply to This Data

Test Level:      Freq. Band:  
 3Vrms       .150-80MHz  
 10Vrms       Enter Other Band Here  
 15Vrms  
 Enter Other Level Here

Signal Line	Result	Observation (Describe any detectable event)
GPS	Pass	
Transducer Cable	Pass	

**Notes:****Tested using 400hz and 1 khz modulation****Spot frequencies of 2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8 & 25MHz; tested at 10Vrms @ 400Hz modulation.**



## 12.0 Power Frequency Magnetic Fields Immunity

### 12.1 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.  
 The test method, standard, and/or test plan was deviated from for the following reason:

**This test is not applicable, because the EUT does not employ magnetically sensitive components.**

## 13.0 Voltage Dips and Interruptions

### 13.1 Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.  
 The test method, standard, and/or test plan was deviated from for the following reason:

**This test is not applicable, because the EUT is not powered through an AC Mains power supply.**

## SECTION D: MEASUREMENT UNCERTAINTY

### General

Measurement Uncertainty is based on the following publications:

- CISPR 16-4-2: Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements
- The Guide to the Expression of Uncertainty in Measurement(GUM): 1995
- ANSI / NCSL Z540.2-1997 (R2002) U.S. Guide to Expression of Uncertainty in Measurement

Calculations for measurement uncertainty are available upon request.

### Emissions:

Test Method	$U_{\text{Lab}}$	$U_{\text{CISPR}}$	Uncertainty Units
Radiated Emissions 30MHz-1000MHz	3.68	5.2	dB
Radiated Emissions 30MHz to 200MHz	3.79	5.2	dB
Radiated Emissions 200 to 1000MHz	3.62	5.2	dB
Radiated Emissions 1-18GHz	3.65	---	dB
Conducted Emissions .150k-30MHz	1.52	3.6	dB
Radiated Disturbances 5MHz to 30MHz	2.81	4.5	dB
Radiated Disturbances 30MHz to 950MHz	2.21	4.5	dB
Harmonic Current Emissions	1.7	---	%
Voltage Fluctuations & Flicker	1.7	---	%
Insertion Loss/Internal Calibrations	.65	---	dB
Radiated Immunity 80-1000MHz	1.21	---	dB
Conducted Immunity .150-80MHz	1.64	---	dB
Frequency Interpolations	.81 (ave)	---	dB

NOTE  $U_{\text{cispr}}$  resembles a value of measurement uncertainty for a specific test, which was determined by considering uncertainties associated with the quantities listed in CISPR 16-4-2:2003 Section 4.2. Where no value is given for  $U_{\text{cispr}}$  the procedure below does not apply.

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If  $U_{\text{Lab}}$  is less than or equal to  $U_{\text{cispr}}$  in Table 5.0-1, then:

- compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

If  $U_{\text{Lab}}$  is greater than  $U_{\text{cispr}}$ , then:

- compliance is deemed to occur if no measured disturbance, increased by  $(U_{\text{Lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance, increased by  $(U_{\text{Lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit.

The ACS calculated MU is much less than the internationally accepted MU, therefore an adjustment to the measured result as mentioned above is not necessary.

### Immunity

The EUT was subjected to the appropriate test levels required by the standard with a confidence level of 95%(k=2).

## SECTION E: CONCLUSION

The EUT is determined to meet the requirements as defined in the applicable regulations.