



For Scope of Accreditation Under Certificate Number: AT-2021

Test Report issued under the responsibility of:



Test Report

Prepared For: Johnson Outdoors

Models Covered:
PiranhaMAX 4

In Accordance with:
EN 60950-1:2006
Clauses:
4.5.4 – Touch Temperatures
5.1 – Touch Current
5.2 – Electric Strength

ACS Report No.: 15-0530.S11.1A
Report Issue Date: January 08, 2016

Tested by:

Rylan London

Reviewed by:

D.C. Massey

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 10 pages

REVISION HISTORY			
DATE	REVISION	DESCRIPTION	APPROVED BY
2016-01-08	A	Initial release.	D.C. Massey

GENERAL INFORMATION.....	3
1.0 INTRODUCTION.....	3
2.0 TEST FACILITIES & ENVIRONMENT	3
2.1 <i>Test Facilities</i>	3
2.2 <i>Laboratory Accreditations/Recognitions/Certifications</i>	3
2.3 <i>Test Equipment Calibration Statement</i>	3
3.0 EQUIPMENT UNDER TEST (EUT) INFORMATION.....	4
TEST RESULTS PER CLAUSE:	5
4.5.4 <i>Touch temperature limits</i>	5
5.1 <i>Touch current</i>	9
5.2 <i>Electric strength</i>	10

GENERAL INFORMATION

1.0 Introduction

This report documents the results of testing performed on January 08, 2016 on the Johnson Outdoors model PiranhaMAX 4 recreational chart plotter.

Testing was performed to evaluate the EUT with regard to the requirements of the specific clauses of standard EN 60950-1:2006. Only these clauses were tested, at the request of the client.

- 4.5.4 Touch Temperature Limits
- 5.1 Touch Current
- 5.2 Electric Strength

This report should not be considered to fulfill all requirements of standard EN 60950-1:2006. A complete evaluation and test program was not conducted.

2.0 Test Facilities & Environment

2.1 Test Facilities

All testing was performed at the following address:

Advanced Compliance Solutions, Inc.
5015 B.U. Bowman Drive
Buford GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598
www.acstestlab.com

The laboratory is fully equipped to carry out the tests outlined in this report.

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the ANSI-ASQ National Accreditation Board under their National Voluntary Laboratory Accreditation Program (ANAB).

2.3 Test Equipment Calibration Statement

Test equipment used for each test is specified in the relevant sections of this test report. Unless expressly given, all test equipment is calibrated on an annual basis, where applicable. All test equipment is operated within the climatic specifications as defined by the equipment manufacturer.

3.0 Equipment Under Test (EUT) Information

Manufacturer:

Johnson Outdoors
1220 Old Alpharetta Road
Suite 340
Alpharetta, GA 30005

Model Tested: PiranhaMAX 4

Description: Recreational chart plotter

Rated input voltage: 10-20Vdc

Maximum rated ambient operating temperature: 60°C



TEST RESULTS *per clause:***4.5.4 Touch temperature limits**

Accessible surfaces of the EUT shall not exceed 95 °C for plastic surfaces, 80 °C for glass surfaces, or 70 °C for metal surfaces, when the EUT is operated at the maximum rated ambient operating temperature. The limits are taken from EN 60950-1 Table 4C.

Test Equipment Used

Asset ID	Manufacturer	Model	Description	Last cal date	Cal due date
276	Agilent	34970A	Datalogger	2015-07-14	2016-07-14
392	Hewlett Packard	34901A	Datalogger module, 20 channel	2015-07-15	2016-07-15
439	DC Source	EZ Digital Co. LTD	GP-4303DU/TP	NCR	NCR
171	Greenlee	DM110	DMM	2014-07-10	2016-07-10
426	Thermotron	S-8 Mini Max	Environmental test chamber	2015-07-15	2016-07-15

NCR = No Calibration Required

Test Site Description

The EUT was tested in an environmental test chamber which controlled the ambient temperature.

Test Methodology

The EUT was configured and connected to satisfy its functional requirements. The EUT was powered by a DC source whose output voltage was monitored by a DMM. Temperatures on operator accessible surfaces of the EUT were monitored using 30 AWG Type T thermocouples and recorded using a datalogger. The EUT was operated in the required ambient until thermal stabilization was reached.

The input voltages to the EUT were 10.5 Vdc and 14.2 Vdc, to simulate a typical 12 Vdc nominal marine battery at “dead battery” and “battery charging” conditions.

Test Justification

- No justification - The EUT was tested per the appropriate test methods and test plan.**
- The test method, standard, and/or test plan was deviated from for the following reason:**

Test Results: See following pages

THERMOCOUPLE LOCATIONS


<u>Channel</u>	<u>Location</u>
1	Ambient
2	Screen right
3	Front right side
4	Left side, near top
5	Back side, top right
6	Right side edge
7	Back side, top left
8	Back side, middle connector
9	Back side, right connector
10	Back side, bottom right
11	Front side, bottom left
12	Back side, center above mount
13	Back side, right of center
14	Back side, left of center
15	Left side, bottom edge



Test Results at 60°C Ambient

Input Voltage: 10.5 VDC

Channel	Location	Temp, °C	Limits
1	Ambient	60.0	—
2	Screen right	63.7	95
3	Front right side	62.0	95
4	Left side, near top	61.1	95
5	Back side, top right	61.9	95
6	Right side edge	61.8	95
7	Back side, top left	62.5	95
8	Back side, middle connector	62.0	95
9	Back side, right connector	61.9	95
10	Back side, bottom right	61.6	95
11	Front side, bottom left	60.9	95
12	Back side, center above mount	62.3	95
13	Back side, right of center	62.1	95
14	Back side, left of center	60.9	95
15	Left side, bottom edge	61.4	95

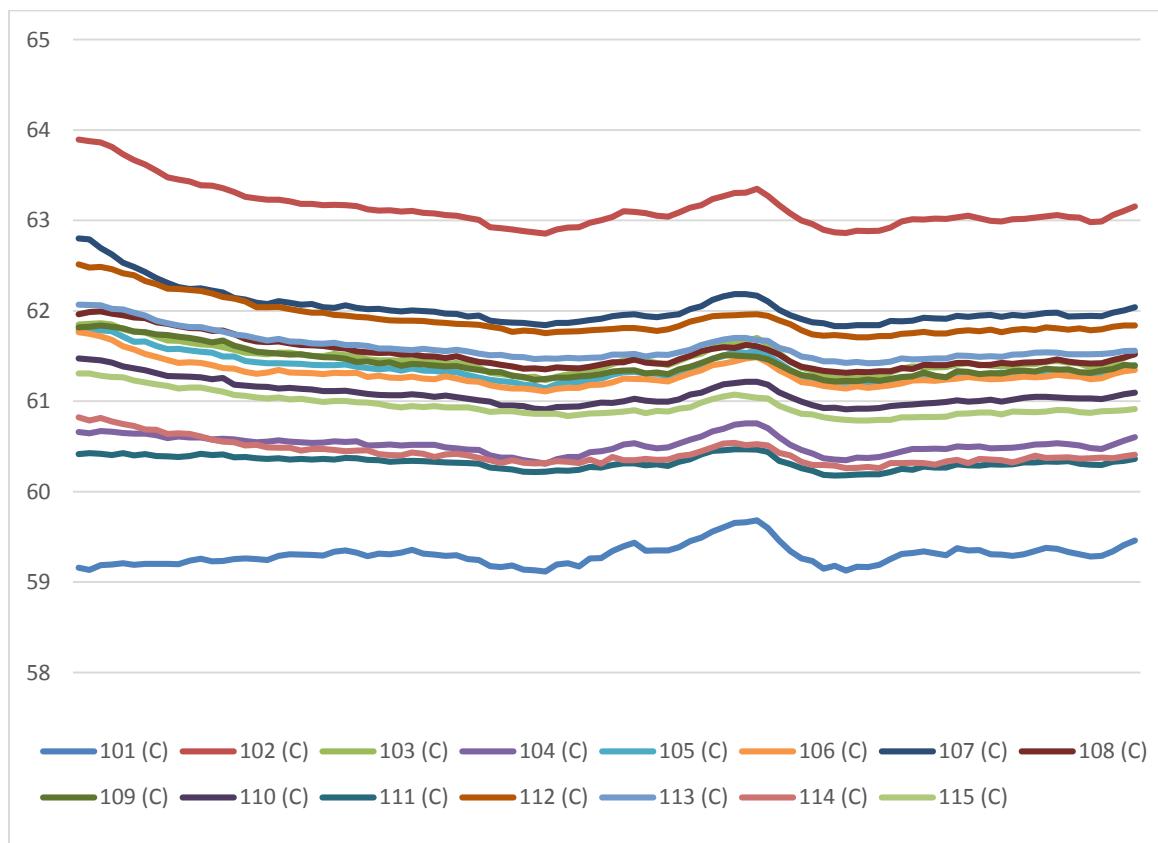


Run Time: 1.5 hours

Test Results at 60°C Ambient

Input Voltage: 14.2 VDC

Channel	Location	Temp, °C	Limits
1	Ambient	60.0	—
2	Screen right	64.7	95
3	Front right side	62.7	95
4	Left side, near top	61.5	95
5	Back side, top right	62.6	95
6	Right side edge	62.6	95
7	Back side, top left	63.6	95
8	Back side, middle connector	62.8	95
9	Back side, right connector	62.7	95
10	Back side, bottom right	62.3	95
11	Front side, bottom left	61.2	95
12	Back side, center above mount	63.3	95
13	Back side, right of center	62.9	95
14	Back side, left of center	61.6	95
15	Left side, bottom edge	62.1	95

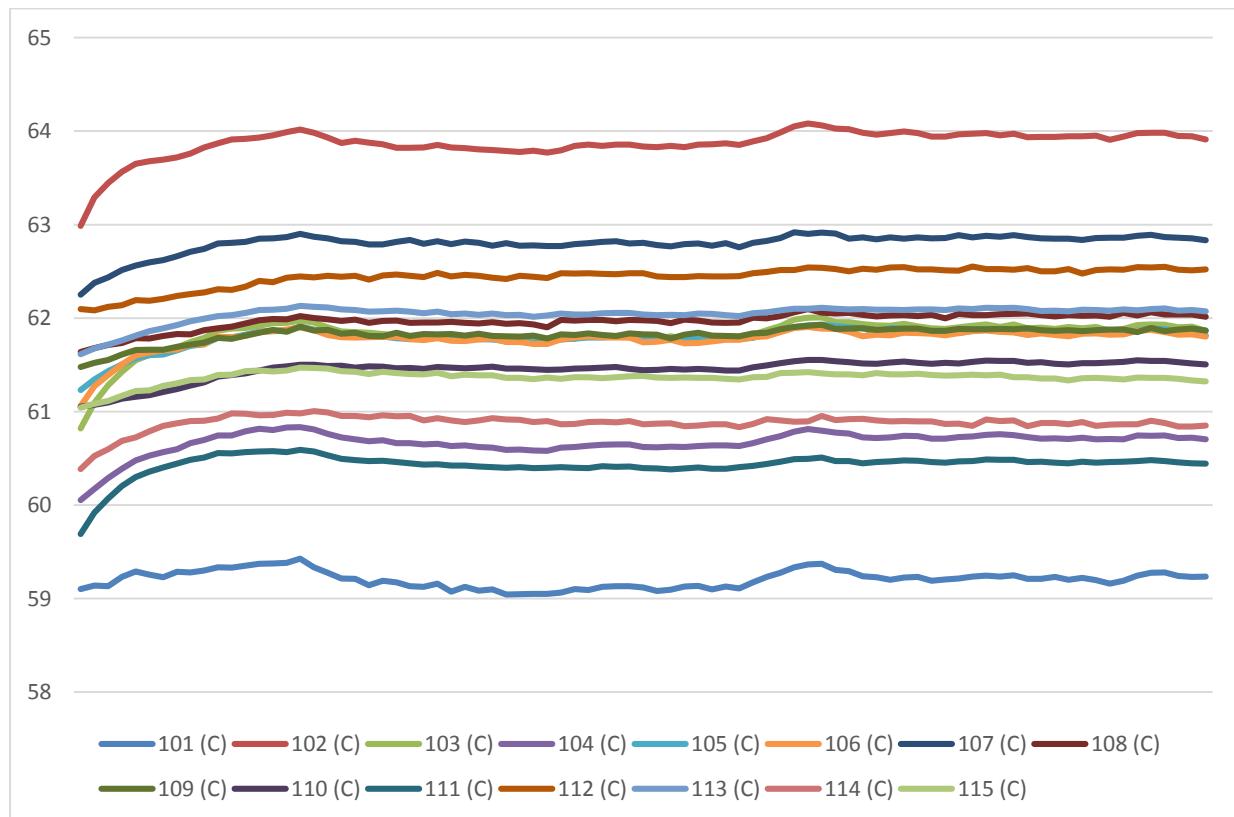

Run Time: 1.2 hours

5.1 Touch current

Touch current was measured using a touch current meter complying with EN 60950-1:2006 Annex D, Figure D1.

Test Equipment Used

Asset ID	Manufacturer	Model	Description	Last cal date	Cal due date
439	DC Source	EZ Digital Co. LTD	GP-4303DU/TP	NCR	NCR
171	Greenlee	DM110	DMM	2014-07-10	2016-07-10
231	Simpson	228	Touch current meter	2015-07-16	2016-07-16

NCR = No Calibration Required

Test Site Description

The EUT was tested on the bench in normal laboratory ambient conditions.

Test Methodology

The EUT was configured and connected to satisfy its functional requirements. The EUT was powered by a DC source whose output voltage was monitored by a DMM. The input voltage to the EUT was 10-20 Vdc.

Touch current between the +12 Vdc input and the enclosure, covered in foil, was measured.

Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.
 The test method, standard, and/or test plan was deviated from for the following reason:

Test performed at client request. EN 60950-1:2006 clause 5.1 states that touch current limits do not apply to DC powered equipment having no connection to wired telecommunication networks.

Test Result:

Measured touch current: 0 mA_{RMS}

5.2 Electric strength

Functional insulation between internal circuits and accessible parts was stressed by the application of a 500 V_{RMS} 60Hz test voltage between the +12 Vdc input pin and the non-conductive surface of the enclosure, covered by metal foil measuring 100mm x 200mm, in close contact with the enclosure.

The test voltage was raised gradually, and applied for one minute.

The EUT is not powered on during the test. Functional insulation between internal circuits, such as between +12 Vdc and DC Return were not tested, and not evaluated according to clause 5.3.4.

Test Equipment Used

Asset ID	Manufacturer	Model	Description	Last cal date	Cal due date
160	Associated Research	3665	Hi-pot tester	2015-07-13	2016-07-13

NCR = No Calibration Required

Test Site Description

The EUT was tested on the bench in normal laboratory ambient conditions.

Test Methodology

Per EN 60950-1:2006, clause 5.2, for Functional Insulation.

Test Justification

No justification - The EUT was tested per the appropriate test methods and test plan.
 The test method, standard, and/or test plan was deviated from for the following reason:

Test Result: PASS

No breakdown of insulation

END OF TEST REPORT