



For Scope of Accreditation Under Certificate Number: AT-2021

## EMI Technical Report

**Prepared For: Johnson Outdoors Marine Electronics, Inc.  
KC ID: TBD**

**Base Model: HELIX 7 CHIRP SI G2N**

**Model Variants: HELIX 7 CHIRP GPS G2N, HELIX 7 CHIRP DI GPS G2N, HELIX 7 CHIRP SI GPS G2N, HELIX 7X CHIRP GPS G2N, HELIX 7X CHIRP DI GPS G2N, HELIX 7X CHIRP SI GPS G2N**

**Product Type: Sonar Fish Finder**

**Product Category: Information Technology Equipment**

**In Accordance with the  
Conformity Assessment Procedure for Electromagnetic Interference  
(RRA Announce 2015-110, Dec 3, 2015)**

**EMI Product Standard: Annex 14 (KN 60945)**

**ACS Report: 16-0342.C07.10C**

**Report Revision: C**

**Report Issue Date: November 4, 2016**

**Project Manager:**

Wayne Orwig  
EMC Engineer  
Advanced Compliance Solutions, Inc.

**Reviewed by:**

Forrest Duncan  
Operations Manager Commercial EMC  
Advanced Compliance Solutions, Inc.

*This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, NIST, or any agency of the Federal Government.*

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 24 pages**

## REVISION HISTORY

---

Report Number: 16-0342.C07.10C

Manufacturer: Johnson Outdoors Marine Electronics, Inc.

Model: HELIX 7 CHIRP SI G2N

# Project Information

ACS Project: 16-0342.C07.10C

---

## Applicant Details

**Manufacturer:** Johnson Outdoors Marine Electronics, Inc.  
**Street Address:** 678 Humminbird Lane  
**City, State/Province and Postal Code:** Eufaula, AL 36027  
**Country:** USA  
**Contact:** Seth Bergman  
**Phone:** 334-687-6613  
**Fax:**  
**Email:** sbergman@johnsonoutdoors.com

## Sample Information

**Model:** HELIX 7 CHIRP SI G2N  
**Model Variant(s):** HELIX 7 CHIRP GPS G2N, HELIX 7 CHIRP DI GPS G2N, HELIX 7 CHIRP SI GPS G2N, HELIX 7X CHIRP GPS G2N, HELIX 7X CHIRP DI GPS G2N, HELIX 7X CHIRP SI GPS G2N  
**Environment of Use:** Residential  
**Sample Receive Date:** July 25, 2016  
**Sample Receive Condition:** Good  
**Test Mode Description:** Battery powered, monitoring depth via sonar, and GPS active.  
**Highest Data Rate:** 800MHz  
**Source:** Main processor

---

## Product Description

The Humminbird HELIX 7 CHIRP SI G2N is a Sonar/Fishfinder product to be used in the marine environment. Product has a 7" display, 10 keypad buttons and displays Sonar return information on the screen. It differs from the H7 G2 by including Ethernet and Bluetooth (Classic and BLE).

The client declares all models are identical and differ only in software. The HELIX 7 CHIRP SI G2N having the most functionality, was submitted for testing to represent the above model variants.

---

## Test Information

**Test Start Date:** July 27, 2016  
**Test End Date:** August 2, 2016  
**Emissions Pre-scan Site:** SAC  
**Final Emissions Site:** OATS  
**EMI Freq. Band:** 10kHz - 4GHz  
**Radiated Emissions Equipment Class:** Class B

---

## Test Methods/Standards Applied

(Check all that apply):

RRA Public Notification 2015-27 Dec 3, 2015: Korea Technical Requirements for Electromagnetic Compatibility

KN 60945 (Annex 14) Test Methods for Electromagnetic Compatibility with RRA Announce 2015-110 (Dec 3, 2015)

---

# Table of Contents

---

<b>1.0 INTRODUCTION.....</b>	<b>5</b>
<b>1.1 SCOPE.....</b>	<b>5</b>
<b>1.2 PERFORMANCE CRITERIA.....</b>	<b>5</b>
<b>2.0 TEST FACILITIES &amp; ENVIRONMENT .....</b>	<b>6</b>
<b>2.1 TEST FACILITIES .....</b>	<b>6</b>
<b>2.2 LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS .....</b>	<b>6</b>
<b>2.3 TEST ENVIRONMENT .....</b>	<b>6</b>
<b>3.0 EQUIPMENT UNDER TEST (EUT).....</b>	<b>6</b>
<b>3.1 MANUFACTURER .....</b>	<b>6</b>
<b>3.2 MODIFICATIONS.....</b>	<b>7</b>
<b>3.3 SYSTEM BLOCK DIAGRAM AND SUPPORT EQUIPMENT .....</b>	<b>7</b>
<b>3.4 OBSERVATIONS.....</b>	<b>8</b>
<b>4.0 RADIATED AND CONDUCTED EMISSIONS .....</b>	<b>9</b>
<b>4.1 RADIATED EMISSIONS.....</b>	<b>9</b>
<b>4.1.1 Test Site Description.....</b>	<b>9</b>
<b>4.1.2 Test Equipment .....</b>	<b>12</b>
<b>4.1.3 Test Methodology .....</b>	<b>12</b>
<b>4.1.4 Test Setup Photographs .....</b>	<b>13</b>
<b>4.1.5 Test Data .....</b>	<b>15</b>
<b>4.2 CONDUCTED EMISSIONS.....</b>	<b>17</b>
<b>4.2.1 Conducted Emissions Test Site.....</b>	<b>17</b>
<b>4.2.2 Test Equipment .....</b>	<b>18</b>
<b>4.2.3 Test Methodology .....</b>	<b>18</b>
<b>4.2.4 Test Setup Photographs .....</b>	<b>19</b>
<b>4.2.5 Test Data .....</b>	<b>20</b>
<b>5.0 MEASUREMENT UNCERTAINTY .....</b>	<b>24</b>
<b>6.0 CONCLUSION.....</b>	<b>24</b>

## 1.0 Introduction

### 1.1 Scope

This report documents conformance with the Electromagnetic Interference requirements outlined in the product information sheet and details the results of testing performed on July 27, 2016 through August 2, 2016 on the model HELIX 7 CHIRP SI G2N manufactured by Johnson Outdoors Marine Electronics, Inc..

### 1.2 Performance Criteria

For model HELIX 7 CHIRP SI G2N the limits which apply are Class B. These limits are found in Table 1.2-1 below:

**Table 1.2-1 Emissions Limits Class B**

	<b>Portable</b>	<b>Protected</b>	<b>Exposed</b>	<b>Submerged</b>
Conducted emissions (9.2)		10 kHz – 150 kHz 150 kHz – 350 kHz 350 kHz – 30 MHz	63 mV – 0,3 mV (96 dB $\mu$ V – 50 dB $\mu$ V) 1 mV – 0,3 mV (60 dB $\mu$ V – 50 dB $\mu$ V) 0,3 mV (50 dB $\mu$ V)	
Radiated emissions (9.3)	150 kHz – 300 kHz 300 kHz – 30 MHz 30 MHz – 2 GHz 156 MHz – 165 MHz	10 mV/m – 316 $\mu$ V/m (80 dB $\mu$ V/m – 52 dB $\mu$ V/m) 316 $\mu$ V/m – 50 $\mu$ V/m (52 dB $\mu$ V/m – 34 dB $\mu$ V/m) 500 $\mu$ V/m (54 dB $\mu$ V/m) except for 16 $\mu$ V/m (24 dB $\mu$ V/m) quasi-peak or 32 $\mu$ V/m (30 dB $\mu$ V/m) peak		

## 2.0 Test Facilities & Environment

### 2.1 Test Facilities

All testing was performed at the following address:

Advanced Compliance Solutions, Inc.  
5015 B.U. Bowman Drive  
Buford GA 30518  
Phone: (770) 831-8048  
Fax: (770) 831-8598  
[www.acstestlab.com](http://www.acstestlab.com)

The laboratory is fully equipped to carry out the tests outlined in the project information section on page 3.

### 2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the ANSI-ASQ National Accreditation Board/ANAB accreditation program, and has been issued certificate number AT-2021 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

ACS has been designated through NIST (US Identification Number: US0156) as a Phase I CAB under the APECTel MRA to perform testing for:

- Chinese Taipei's (Taiwan) Bureau of Standards, Metrology and Inspection: BSMI Number SL2-IN-E-1127R
- Hong Kong's Office of the Telecommunications Authority (OFTA)
- Singapore's Infocomm Development Authority of Singapore (IDA)
- Australia's Australian Communication and Media Authority (ACMA)

ACS has been recognized by the Radio Research Agency (RRA) Korea Communications Commission (KCC) under the Asian Pacific Economic Cooperation Mutual Recognition Arrangement (APEC Tel MRA). ACS is designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase 1 procedures of the aforementioned MRA.

ACS test sites are also designated by Japan's Voluntary Control Council for Interference (VCCI) to perform testing in accordance with VCCI technical regulations. The VCCI has issued the following designation code in recognition of these test sites: A-0152.

### 2.3 Test Environment

Unless otherwise specified by the generic or product standard, the EUT was evaluated within the climate conditions of the EUT as specified by the manufacturer.

Where the manufacturer does not specify climate parameters for the EUT, all test are performed within the ambient temperature range of 40°F to 104°F.

## 3.0 Equipment Under Test (EUT)

### 3.1 Manufacturer

Johnson Outdoors Marine Electronics, Inc.  
678 Humminbird Lane  
Eufaula, AL 36027  
Seth Bergman  
334-687-6613  
[sbergman@johnsonoutdoors.com](mailto:sbergman@johnsonoutdoors.com)

### 3.2 Modifications

Table 3.2-1 below describes any modification required to bring the EUT into compliance with the test standard. Photographs of the modifications, if any, are contained in appendix a.

Table 3.2-1: EUT Modifications

Modifications were not required to bring the EUT into compliance with the requirements.  
 Modifications were required to bring the EUT into compliance with the requirements.

### 3.3 System Block Diagram and Support Equipment

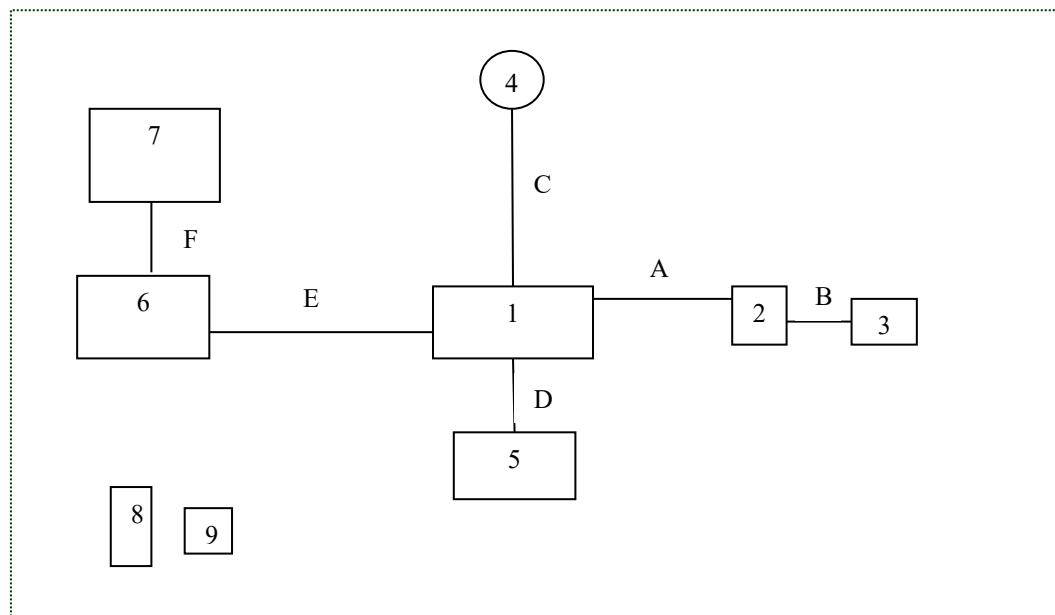


Figure 3.3-1: System Block Diagram

Table 3.3-1: EUT and Support Equipment Description

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT Display	Humminbird	Helix 7	N/A
2	Depth Sensor	Johnson Outdoors	N/A	N/A
3	Floor Simulator Switch	Johnson Outdoors	N/A	N/A
4	GPS	Humminbird	AS GPS HS	16060942-0040
5	12V Battery	ExpertPower	EXP12180	N/A
6	Support Display Unit	Humminbird	Helix 7	N/A
7	12V Battery	AutoCraft	24DC-1	N/A
8	Support Cell Phone	Samsung	N/A	SM-N920V
9	Wireless Remote	Humminbird	N/A	N/A

Table 3.3-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	Depth Sensor Power Cable	600 cm	Yes	1 - 2
B	Floor Simulator Switch Cable	35 cm	Yes	2 - 3
C	GPS Power Cable	600 cm	Yes	1 - 4
D	EUT Power Cable	200 cm	Yes	1 - 5
E	DIN Connecting Cable	1000 cm	Yes	1 - 6
F	Support Display Power Cable	30 cm	Yes	6 - 7

### 3.4 Observations

Any general observations regarding any part of the evaluation are given in table 3.4-1.

Table 3.4-1: Observations

<u>Observation No.</u>	<u>Description</u>

## 4.0 Radiated and Conducted Emissions

### 4.1 Radiated Emissions

#### 4.1.1 Test Site Description

##### 4.1.1.1 Open Area Test Site

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 4.1.1.1-1 below:

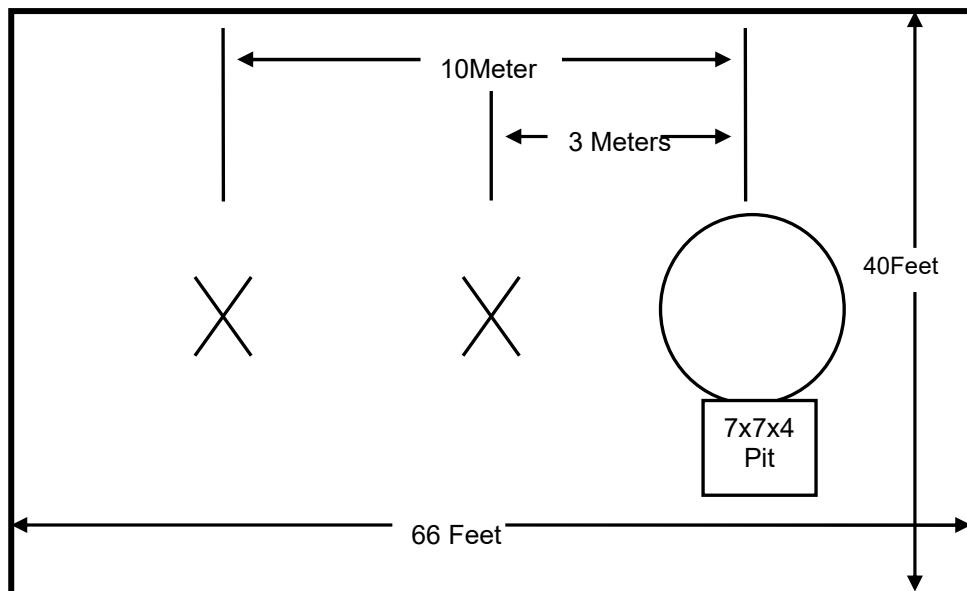


Figure 4.1.1.1-1: Open Area Test Site

#### 4.1.1.2 Semi-Anechoic Chamber

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 4" x 4" x  $\frac{3}{4}$ " thick and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable. The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

To comply with the requirements of the test methods given on page 4, RF absorbing foam was placed inside the chamber in a configuration that provided the best results. First, an 8 ft. patch of 12" tall absorber was placed on the floor between the turntable and the receiving antenna. This absorber meets the absorption requirements specified in ANSI C63.4:2009. Next, three vertical structures (Fences) were created and covered with 8" pyramidal RF absorbing foam, two 4 ft. x 4 ft. and one 6 ft. x 4 ft. These fences were placed at locations to prevent high energy signals from reaching the back chamber wall and reflecting back to the receive antenna.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 4.1.1.2-1 below:

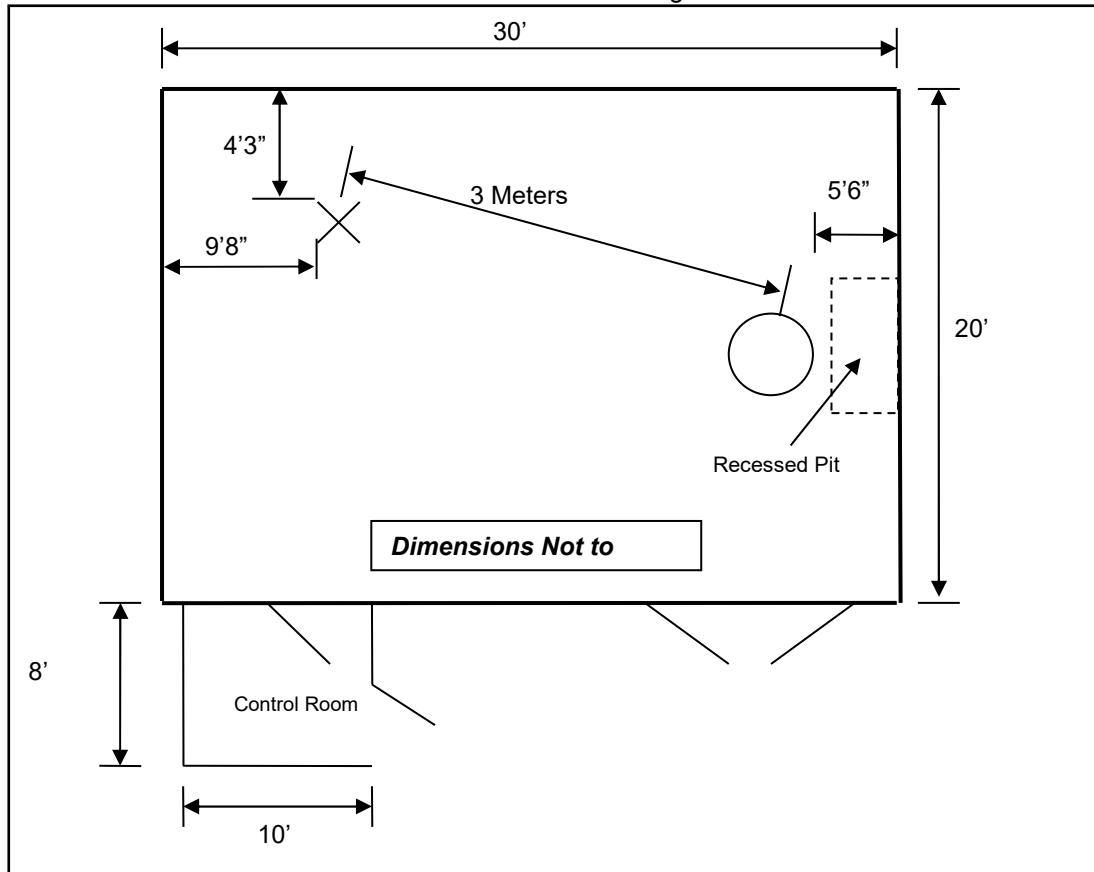


Figure 4.1.1.2-1: Semi-Anechoic Chamber Test Site

#### 4.1.1.3 Fully Anechoic Chamber

The 3m fully anechoic chamber is used for pre-screening the EUT for emissions only. Final screening is performed on the OATS or in case of Class B EUTs, in the 3m semi-anechoic chamber. The Fully Anechoic Chamber has been characterized for field uniformity in accordance with IEC 61000-4-3 and can be used for final radiated fields immunity testing.

The Fully-Anechoic Chamber Test Site consists of a 24'L x 16'W x 12'H shielded enclosure. The chamber is fully lined with RF absorbing foam. The foam ranges in type from 8-24" conventional pyramidal cones, 8-12" conventional wedges and 6" and 16" Hybrid Foam over ferrite tile. The Hybrid material is placed in the 6 specular regions of the chamber for better low-frequency performance. The specular regions are 1) directly behind the receiving antenna, 2) on the floor between the receiving antenna and the EUT table, 3) the wall directly behind the EUT, 4&5) the side walls between the receiving antenna and the EUT table and 6) the ceiling between the receiving antenna and the EUT. The specular regions are 6' x 4' in size.

The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the shield using 3/4" stainless steel braided cable.

The turntable is a remotely controlled EMCO Model 1060 and is 150cm in diameter and is located 1m from the absorber on the back wall of the chamber.

A diagram of the Fully Anechoic Chamber Test Site is shown in Figure 4.1.1.3-1 below:

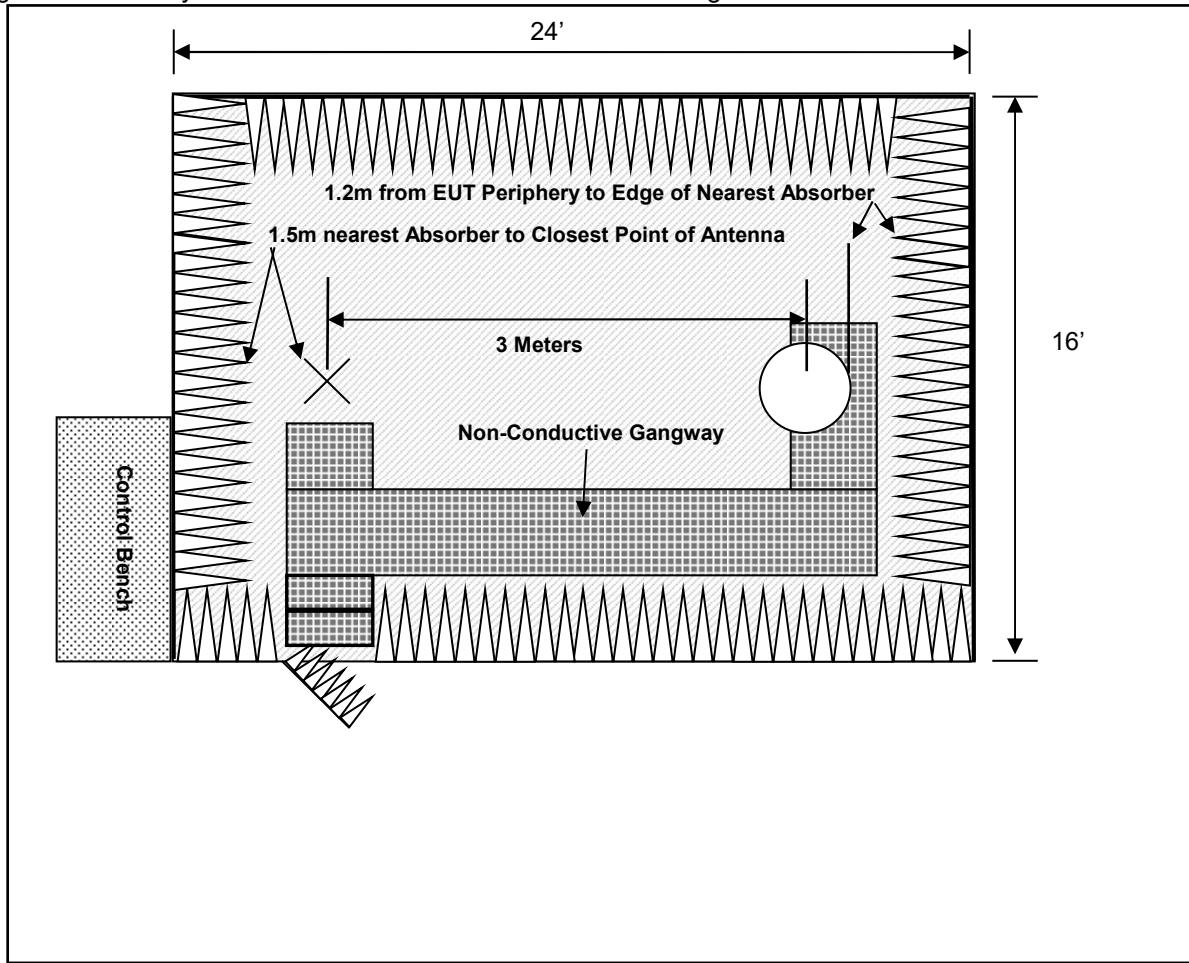


Figure 4.1.1.3-1: Fully Anechoic Chamber Test Site

#### 4.1.2 Test Equipment

Table 4.1.2-1 identifies all equipment used for radiated emissions respectively.

**Table 4.1.2-1 Test Equipment – Radiated Emissions**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
RE112	Rohde & Schwarz	ESIB26	Receiver	836119/012	7/13/2016	7/13/2017
73	Agilent	8447D	Amplifiers	2727A05624	7/21/2016	7/21/2017
412	Electro Metrics	LPA-25	Antennas	1241	8/8/2016	8/8/2018
338	Hewlett Packard	8449B	Amplifiers	3008A01111	8/21/2015	8/21/2017
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/30/2015	4/30/2017
40	EMCO	3104	Antennas	3211	6/8/2016	6/8/2018
616	Florida RF Cables	SMRE-200W-12.0-SMRE	Cables	N/A	9/3/2015	9/3/2016
422	Florida RF	SMS-200AW-72.0-SMR	Cables	805	10/30/2015	10/30/2016
167	ACS	Chamber EMI Cable Set	Cable Set	167	10/20/2015	10/20/2016
193	ACS	OATS cable Set	Cable Set	193	7/21/2016	7/21/2017
211	Eagle	C7RFM3NFM	Filters	HLC-700	10/19/2015	10/19/2016
213	TEC	PA 102	Amplifiers	44927	8/8/2016	8/8/2017
486	Hewlett Packard	8591E	Analyzers	3543A04709	7/12/2016	7/12/2017
90	Electro-Metrics	LPA25	Antennas	1476	12/10/2015	12/10/2017
544	ETS Lindgren	3110B	Antennas	3361	12/7/2015	12/7/2017

NCR = No Calibration Required

#### 4.1.3 Test Methodology

**4.1.3.1 Pre-Scans** Radiated pre-scans are performed on all EUTs in either the 3m Semi-Anechoic or the 3m Fully-Anechoic Chamber. Final emission testing for Class A equipment is performed on the 3/10m Open Area Test Site (OATS) as described in section 4.1.1.1. Final emission testing on Class B equipment can be performed either in the 3m Semi-Anechoic chamber described in section 4.1.1.2 or on the OATS.

Pre-scans are a method by which the 10 highest emissions can be identified for final evaluation. This is achieved by taking automated emission snapshots of the EUT at various azimuths and antenna heights. The software is programmed to perform a peak sweep of the band using the maxhold function. This sweep is performed every 90° in both horizontal and vertical polarities and at antenna heights of 100cm and 300cm. Although not a fully maximized scan, the pre-scan gives a good indication of pass or fail.

#### 4.1.3.2 Final Scans

Radiated emissions measurements were made over the frequency range of 30MHz to 4GHz. Quasi-Peak measurements are taken with the Spectrum Analyzer's resolution bandwidth was set to 120KHz and video bandwidth set to 300 kHz for measurements below 1000MHz. Average measurements above 1000MHz are taken using measurement instruments average detector. The calculation for the radiated emissions field strength is as follows:

$$\begin{aligned} \text{Corrected Reading} &= \text{Analyzer Reading} + \text{Cable Loss} + \text{Antenna Factor} \\ \text{Margin (dB)} &= \text{Applicable Limit} - \text{Corrected Reading} \end{aligned}$$

#### 4.1.3.3 Test Criteria

The EUT must meet the Class A Limits as given in table 1.2-1.

#### 4.1.3.4 Test Justification

**No justification - The EUT was tested per the appropriate test methods and test plan.**  
 **The test method, standard, and/or test plan was deviated from for the following reason:**

#### 4.1.4 Test Setup Photographs



Figure 4.1.4-1: Radiated Emissions - Front View



Figure 4.1.4-2: Radiated Emissions - Rear View



Figure 4.1.4-3: Radiated Emissions – Front View – Above 30MHz



Figure 4.1.4-4: Radiated Emissions – Rear View – Above 30MHz

#### 4.1.5 Test Data

Final tabulated radiated emissions data are reported in the Test Data Table below:

##### Test Parameters:

Test Date:	8/22/2016	Temperature (°C)	26.2
Technician:	Jaime Smith	Humidity (%)	37.7
Equipment Class:	Class B	Barometric Pressure (mBar)	1020.3
Tested Modes:	GPS Active; Sonar Measuring Depth (7.2 ft), Speed/Temp Sensor Active		
AC Input Power:	N/A		
DC Input Power:	12Vdc		

##### Test Data Table:

Measurement Distance:				150KHz-30MHz								
Frequency (MHz)	Measured Level (dBuV)		Antenna Polarity (H/V)	Antenna Height (cm)	Turntable Position (o)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	Pk	Qpk/Av					Pk	Qpk/Av	Pk	Qpk/Av	Pk	Qpk/Av
17.628		5.01	H	150	250	11.39	-----	16.40	-----	30.1	-----	13.7
23.397		4.40	H	150	185	10.62	-----	15.02	-----	35.0	-----	19.9

Qpk = Quasi-Peak Measurement or Limit (< 1GHz)

AV = Average Measurement or Limit (>1GHz)

##### Notes:

**Test Data Table:**

Measurement Distance:				30-2000MHz								
Frequency (MHz)	Measured Level (dBuV)		Antenna Polarity (H/V)	Antenna Height (cm)	Turntable Position (o)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	Pk	Qpk/Av					Pk	Qpk/Av	Pk	Qpk/Av	Pk	Qpk/Av
30.42	23.12	V	V	100	35	-12.21	-----	10.91	-----	54.0	-----	43.1
39	20.28	V	V	100	270	-13.72	-----	6.56	-----	54.0	-----	47.4
52.68	20.83	V	V	100	0	-13.65	-----	7.18	-----	54.0	-----	46.8
58.8	20.96	V	V	100	90	-13.75	-----	7.21	-----	54.0	-----	46.8
97.08	37.36	V	V	100	90	-13.43	-----	23.93	-----	54.0	-----	30.1
286.64	20.14	H	H	100	180	-9.27	-----	10.87	-----	54.0	-----	43.1

Qpk = Quasi-Peak Measurement or Limit (< 1GHz)

AV = Average Measurement or Limit (>1GHz)

**Notes:**

## 4.2 Conducted Emissions

### 4.2.1 Conducted Emissions Test Site

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

A diagram of the room is shown below in figure 4.1.4-1:

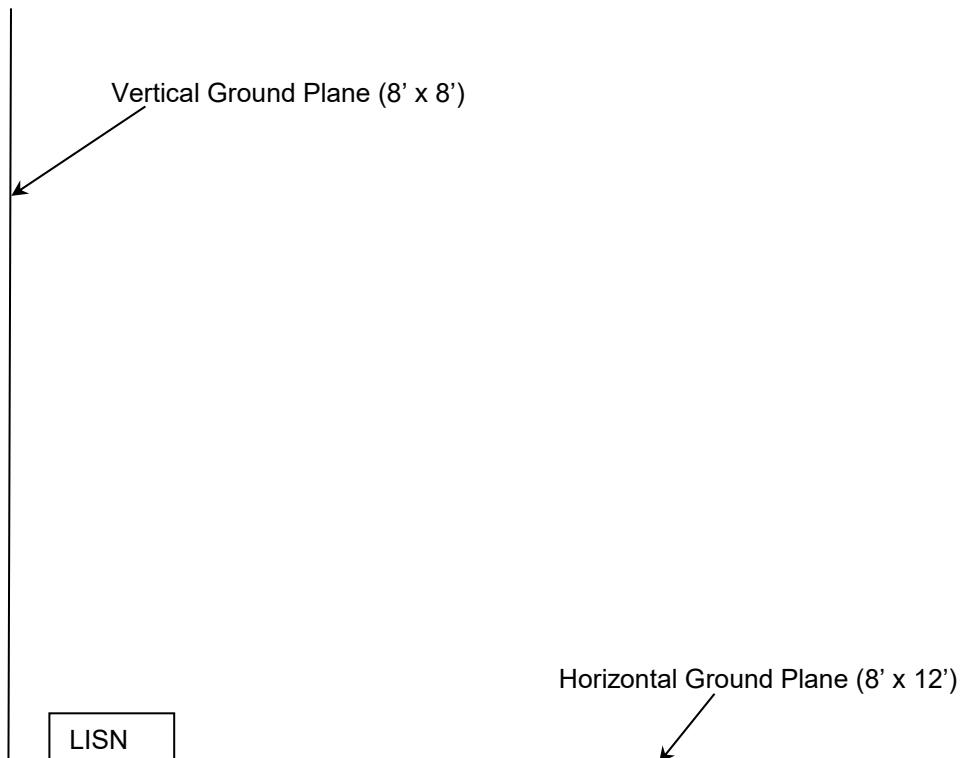


Figure 4.2-1: AC Mains Conducted EMI Site

#### 4.2.2 Test Equipment

**Table 4.2.2-1 Test Equipment – Conducted Emissions**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
RE112	Rohde & Schwarz	ESIB26	Receiver	836119/012	7/13/2016	7/13/2017
324	ACS	Belden	Cables	8214	5/2/2016	5/2/2017
494	Omega	iBTHX-W	mate Monitoring Equipment	9460211	8/1/2016	8/1/2018
3010	Rohde & Schwarz	ENV216	LISN	3010	7/11/2016	7/11/2017

NCR = No Calibration Required

#### 4.2.3 Test Methodology

Conducted emissions were performed from 150 kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

$$\text{Corrected Reading} = \text{Analyzer Reading} + \text{LISN Loss} + \text{Cable Loss}$$

$$\text{Margin} = \text{Applicable Limit} - \text{Corrected Reading}$$

#### 4.2.3.1 Test Criteria

The EUT must meet the Class A Limits as given in section 1.2-1.

#### 4.2.3.2 Test Justification

**No justification - The EUT was tested per the appropriate test methods and test plan.**  
 **The test method, standard, and/or test plan was deviated from for the following reason:**

#### 4.2.4 Test Setup Photographs

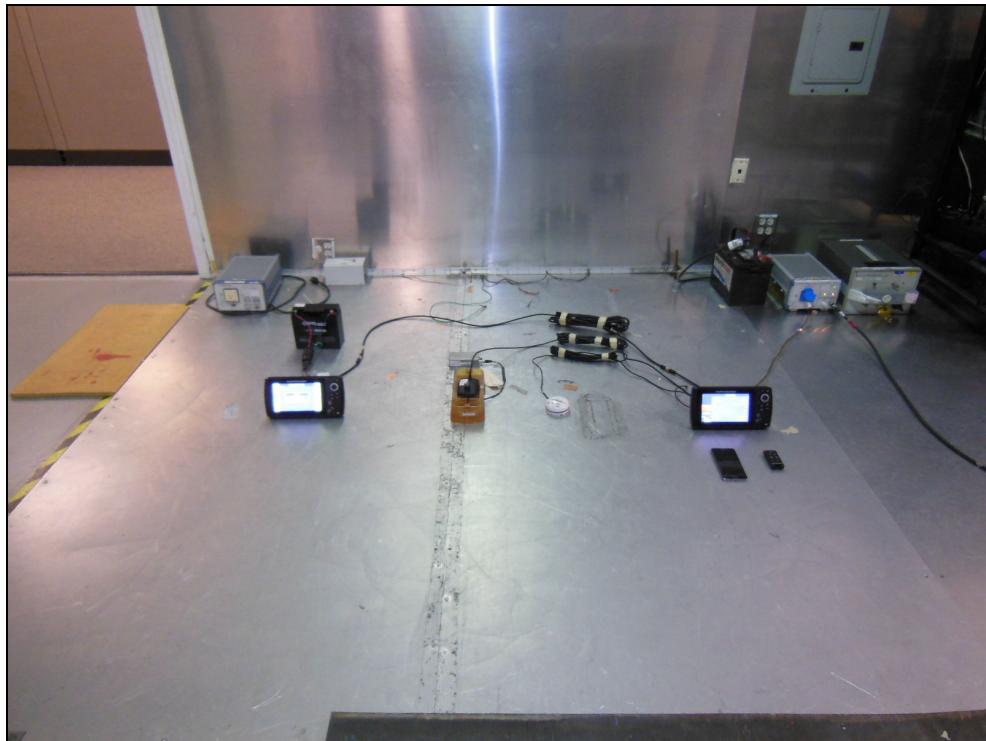


Figure 4.2.4-1: Conducted Emissions Test Setup – Front View

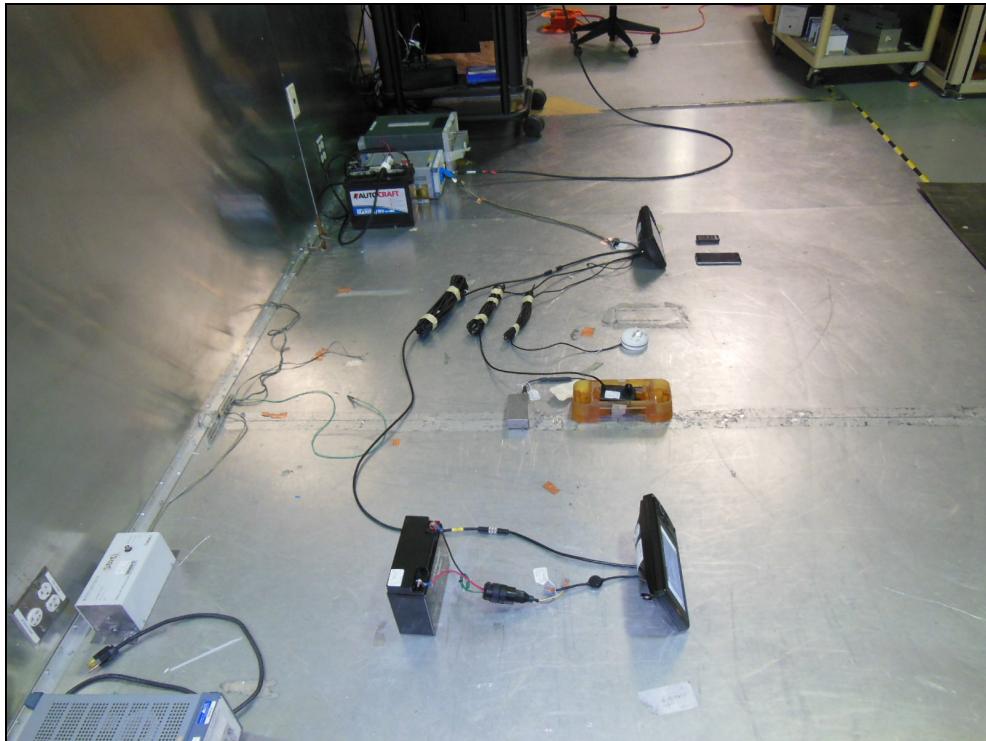


Figure 4.2.4-2: Conducted Emissions Test Setup – Side View

#### 4.2.5 Test Data

Tabulated data is given in the Test Data Tables below.

##### Test Parameters:

Test Date:	July 25, 2016	Temperature (°C)	26.9
Technician:	Sean Vick	Humidity (%)	43.2
Equipment Class:	Class B	Barometric Pressure (mBar)	1014.3
Tested Modes:	EUT on; Monitoring depth; BT connected to phone and remote		
AC Input Power:	N/A		
DC Input Power:	12Vdc		

##### Tested Leads:

AC Mains – Number of Lines:  
 DC Mains – Number of Lines: 4  
 Telecom Port – Quantity:

##### Test Data Tables:

<input type="checkbox"/> <b>Check All That Apply to This Data</b> <input checked="" type="checkbox"/> Line 1 <input type="checkbox"/> Line 2 <input type="checkbox"/> Line 3 <input type="checkbox"/> Line 4 <input type="checkbox"/> To Ground <input checked="" type="checkbox"/> Floating <input type="checkbox"/> Telecom Port _____ <input checked="" type="checkbox"/> dB $\mu$ V <input type="checkbox"/> dB $\mu$ A							
Frequency (MHz)	Corrected Reading		Limit (dB $\mu$ V)	Margin (dB)	Line	Correction (dB)	
	Quasi-Peak (dB $\mu$ V)	Average (dB $\mu$ V)					
0.028106	---	23.24	---	---	L1	9.4	
0.028106	28.53	---	74.85	46.32	L1	9.4	
0.029962	---	49.49	---	---	L1	9.4	
0.029962	49.31	---	73.70	24.39	L1	9.4	
0.036012	---	24.93	---	---	L1	9.6	
0.036012	34.12	---	70.51	36.39	L1	9.6	
0.059914	---	41.91	---	---	L1	9.6	
0.059914	41.81	---	62.37	20.56	L1	9.6	
0.089882	---	33.03	---	---	L1	9.7	
0.089882	33.24	---	56.56	23.32	L1	9.7	
0.131148	---	7.16	---	---	L1	9.7	
0.131148	10.67	---	51.64	40.97	L1	9.7	

##### Notes:

<150KHz

<u>Check All That Apply to This Data</u> <input type="checkbox"/> Line 1 <input checked="" type="checkbox"/> Line 2 <input type="checkbox"/> Line 3 <input type="checkbox"/> Line 4 <input type="checkbox"/> To Ground <input checked="" type="checkbox"/> Floating <input type="checkbox"/> Telecom Port _____ <input checked="" type="checkbox"/> dB $\mu$ V <input type="checkbox"/> dB $\mu$ A						
Power Supply Description: <u>12Vdc</u>						
Frequency (MHz)	Corrected Reading		Limit (dB $\mu$ V)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dB $\mu$ V)	Average (dB $\mu$ V)				
0.029984	---	49.22	---	---	N	9.4
0.029984	49.13	---	73.69	24.56	N	9.4
0.059902	---	41.94	---	---	N	9.6
0.059902	41.78	---	62.37	20.59	N	9.6
0.089405	---	10.84	---	---	N	9.7
0.089405	14.83	---	56.64	41.81	N	9.7
0.089858	---	33.31	---	---	N	9.7
0.089858	33.32	---	56.57	23.25	N	9.7
0.135605	---	8.10	---	---	N	9.7
0.135605	12.41	---	51.23	38.82	N	9.7
0.142632	---	12.43	---	---	N	9.7
0.142632	15.58	---	50.61	35.03	N	9.7

**Notes:**  
 <150KHz

Check All That Apply to This Data							
Frequency (MHz)		Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
		Quasi-Peak (dBuV)	Average (dBuV)				
1.745191	---	2.56	---	---	---	L1	9.8
1.745191	22.24	---	50.00	27.76	L1	9.8	
2.947996	---	-2.86	---	---	---	L1	9.8
2.947996	16.06	---	50.00	33.94	L1	9.8	
3.731964	---	-4.19	---	---	---	L1	9.8
3.731964	15.72	---	50.00	34.28	L1	9.8	
4.188878	---	-4.06	---	---	---	L1	9.9
4.188878	16.09	---	50.00	33.91	L1	9.9	
6.758016	---	-0.65	---	---	---	L1	10.0
6.758016	13.45	---	50.00	36.55	L1	10.0	
7.994056	---	2.68	---	---	---	L1	10.0
7.994056	11.34	---	50.00	38.66	L1	10.0	

Notes:  
 >150KHz

Check All That Apply to This Data						
Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
2.971443	---	3.37	---	---	N	9.8
2.971443	19.55	---	50.00	30.45	N	9.8
3.463026	---	-4.05	---	---	N	9.8
3.463026	16.94	---	50.00	33.06	N	9.8
3.739379	---	-3.77	---	---	N	9.8
3.739379	16.28	---	50.00	33.72	N	9.8
5.875651	---	1.70	---	---	N	10.0
5.875651	15.61	---	50.00	34.39	N	10.0
6.034569	---	-0.52	---	---	N	10.0
6.034569	23.07	---	50.00	26.93	N	10.0
6.261623	---	-1.90	---	---	N	10.0
6.261623	21.27	---	50.00	28.73	N	10.0

**Notes:**

>150KHz

## 5.0 Measurement Uncertainty

### General

Measurement Uncertainty is based on the following publications:

- CISPR 16-4-2: Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements
- The Guide to the Expression of Uncertainty in Measurement(GUM): 1995
- ANSI / NCSL Z540.2-1997 (R2002) U.S. Guide to Expression of Uncertainty in Measurement

Calculations for measurement uncertainty are available upon request.

### Emissions:

Table 5.0-1: Values of  $U_{\text{cispr}}$  and  $U_{\text{Lab}}$

Measurement	$U_{\text{cispr}}$	$U_{\text{Lab}}$
Conducted disturbance (mains port ) (9 kHz – 150 kHz) (150 kHz – 30 MHz)	4,0 dB 3,6 dB	2.54 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1 000 MHz)	5,2 dB	3.93 dB

NOTE  $U_{\text{cispr}}$  resembles a value of measurement uncertainty for a specific test, which was determined by considering uncertainties associated with the quantities listed in CISPR 16-4-2:2003 Section 4.2.

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If  $U_{\text{Lab}}$  is less than or equal to  $U_{\text{cispr}}$  in Table 5.0-1, then:

- compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

If  $U_{\text{Lab}}$  is greater than  $U_{\text{cispr}}$ , then:

- compliance is deemed to occur if no measured disturbance, increased by  $(U_{\text{Lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance, increased by  $(U_{\text{Lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit.

The ACS calculated MU is much less than the internationally accepted MU, therefore an adjustment to the measured result as mentioned above is not necessary.

## 6.0 Conclusion

The EUT is determined to meet the requirements as defined in the applicable regulations.